

NORMAL



Machine Id
KENWORTH 447
 Component
Diesel Engine
 Fluid
 DIESEL ENGINE OIL SAE 15W40 (--- QTS)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.
 Please specify the brand, type, and viscosity of the oil on your next sample.

Wear
 All component wear rates are normal.

Contamination
 Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION method limit/base current history1 history2

Sample Number	Client Info		PCA0106749	PCA0082946	---
Sample Date	Client Info		06 Apr 2024	04 Feb 2024	---
Machine Age	mls	Client Info	157300	0	---
Oil Age	mls	Client Info	0	0	---
Oil Changed	Client Info		Changed	N/A	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION method limit/base current history1 history2

Fuel	WC Method	>5	<1.0	<1.0	---
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS method limit/base current history1 history2

Iron	ppm	ASTM D5185m	>100	14	16	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>3	<1	0	---
Aluminum	ppm	ASTM D5185m	>20	6	9	---
Lead	ppm	ASTM D5185m	>40	<1	<1	---
Copper	ppm	ASTM D5185m	>330	1	1	---
Tin	ppm	ASTM D5185m	>15	1	<1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
Cadmium	ppm	ASTM D5185m		<1	0	---

ADDITIVES method limit/base current history1 history2

Boron	ppm	ASTM D5185m	250	6	0	---
Barium	ppm	ASTM D5185m	10	0	0	---
Molybdenum	ppm	ASTM D5185m	100	62	57	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	450	905	997	---
Calcium	ppm	ASTM D5185m	3000	1110	1074	---
Phosphorus	ppm	ASTM D5185m	1150	1096	1099	---
Zinc	ppm	ASTM D5185m	1350	1253	1251	---
Sulfur	ppm	ASTM D5185m	4250	3286	2759	---

CONTAMINANTS method limit/base current history1 history2

Silicon	ppm	ASTM D5185m	>25	7	8	---
Sodium	ppm	ASTM D5185m	>158	0	1	---
Potassium	ppm	ASTM D5185m	>20	11	19	---




INFRA-RED method limit/base current history1 history2

Soot %	%	*ASTM D7844	>3	0.3	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	8.8	9.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.6	20.0	---

FLUID DEGRADATION method limit/base current history1 history2

Oxidation	Abs/.1mm	*ASTM D7414	>25	16.2	17.1	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.7	7.4	---





OIL ANALYSIS REPORT

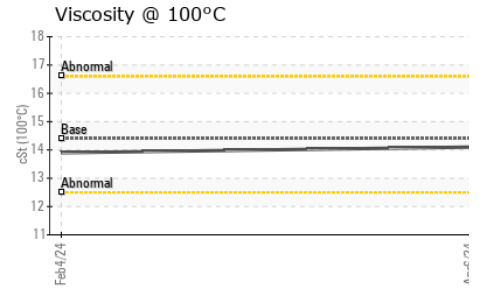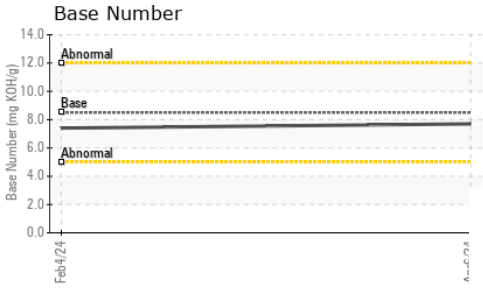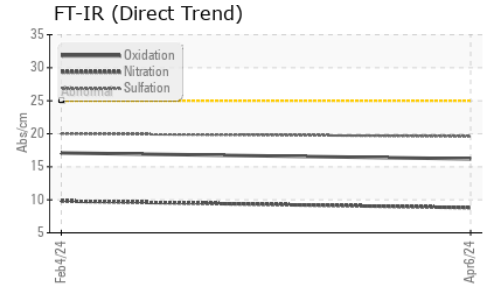

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	14.1	13.9	---

GRAPHS

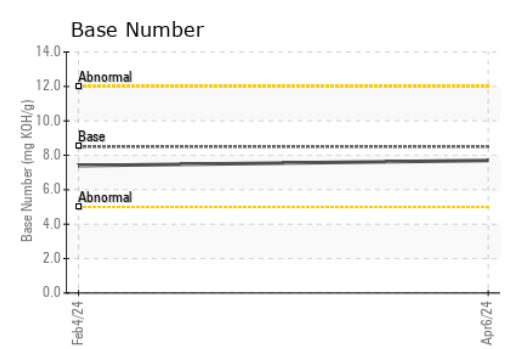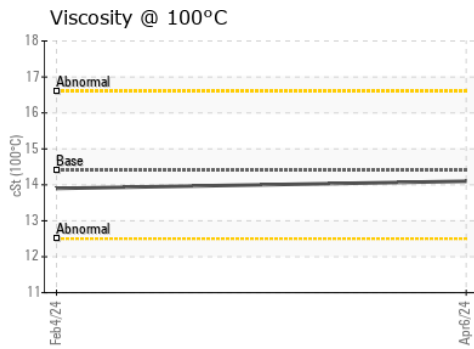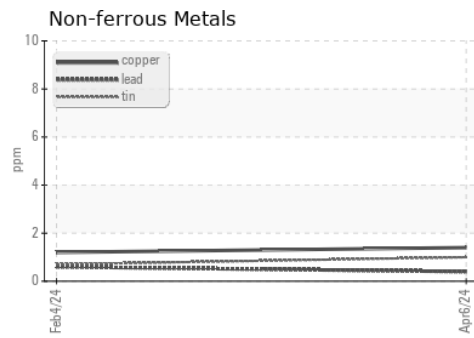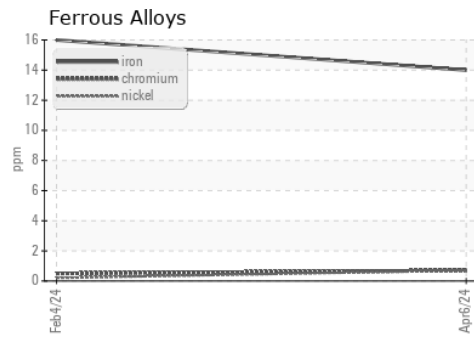

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0106749 **Received** : 22 Apr 2024
Lab Number : **06156697** **Tested** : 23 Apr 2024
Unique Number : 10992120 **Diagnosed** : 23 Apr 2024 - Wes Davis
Test Package : FLEET

LEFEBVRE AND SONS
 10895 171ST AVE NW
 ELK RIVER, MN
 US 55330
 Contact: JAY LEFEBVRE
 jay.lefebvre@lefruck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)