




# OIL ANALYSIS REPORT



Area  
**(BD75348) {UNASSIGNED}**  
 Machine Id  
**814031 MACK LR64R**  
 Component  
**Diesel Engine**  
 Fluid  
**TIER ONE 15W40 (--- GAL)**

### Sample Rating Trend

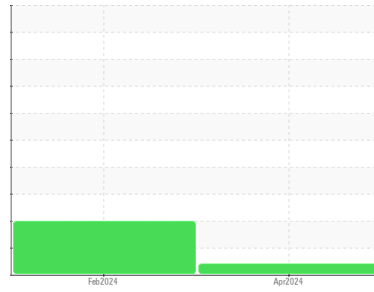

### VISCOSITY



### DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0115244</b>	GFL0102218	---
Sample Date	Client Info			<b>17 Apr 2024</b>	21 Feb 2024	---
Machine Age	hrs	Client Info		<b>558</b>	269	---
Oil Age	hrs	Client Info		<b>28</b>	269	---
Oil Changed	Client Info			<b>Changed</b>	Not Changd	---
Sample Status				<b>ATTENTION</b>	ABNORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>120	<b>54</b>	27	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	<1	---
Nickel	ppm	ASTM D5185m	>5	<b>1</b>	7	---
Titanium	ppm	ASTM D5185m	>2	<b>2</b>	<1	---
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	---
Aluminum	ppm	ASTM D5185m	>20	<b>7</b>	6	---
Lead	ppm	ASTM D5185m	>40	<b>3</b>	<1	---
Copper	ppm	ASTM D5185m	>330	<b>3</b>	49	---
Tin	ppm	ASTM D5185m	>15	<b>1</b>	2	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>9</b>	305	---
Barium	ppm	ASTM D5185m		<b>0</b>	<1	---
Molybdenum	ppm	ASTM D5185m		<b>83</b>	110	---
Manganese	ppm	ASTM D5185m		<b>1</b>	4	---
Magnesium	ppm	ASTM D5185m		<b>1229</b>	709	---
Calcium	ppm	ASTM D5185m		<b>1544</b>	1456	---
Phosphorus	ppm	ASTM D5185m		<b>1606</b>	653	---
Zinc	ppm	ASTM D5185m		<b>1768</b>	816	---
Sulfur	ppm	ASTM D5185m		<b>4923</b>	2439	---



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>6</b>	▲ 80	---
Sodium	ppm	ASTM D5185m		<b>6</b>	2	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	6	---
Fuel	%	ASTM D3524	>3.0	<b>&lt;1.0</b>	0.4	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>4	<b>0.5</b>	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.5</b>	7.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.9</b>	25.4	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.1</b>	21.0	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.3</b>	9.3	---







# OIL ANALYSIS REPORT

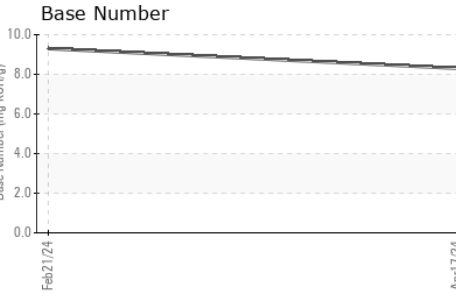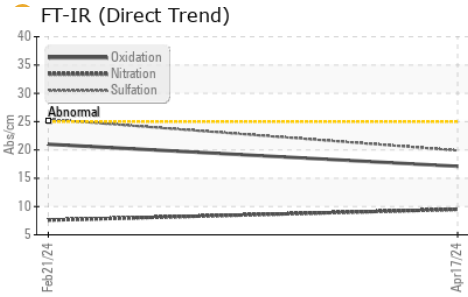

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	● 11.3	▲ 9.8	---

## GRAPHS

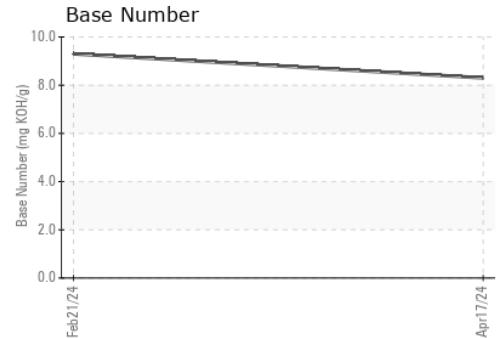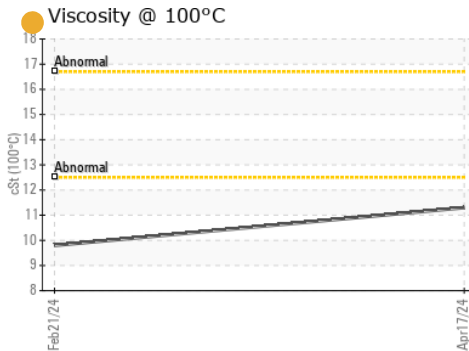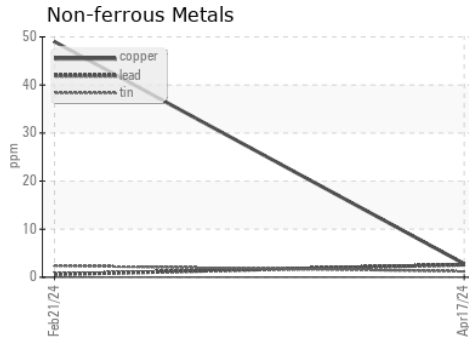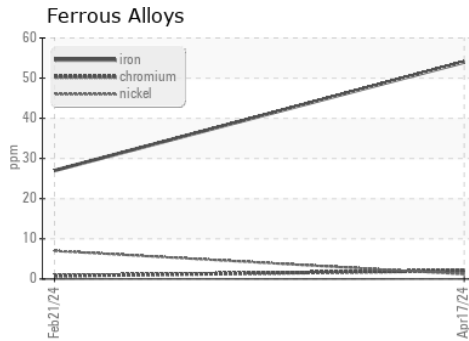

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0115244  
**Lab Number** : 06156733  
**Unique Number** : 10992156  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**Received** : 22 Apr 2024  
**Tested** : 24 Apr 2024  
**Diagnosed** : 24 Apr 2024 - Jonathan Hester

**GFL Environmental - 642- Grand Rapids Hauling**  
 5826 Alden Nash Ave SE  
 Lowell, MI  
 US 49331

Contact: Josh Vanvolkinburg  
 jvanvolkinburg@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: