




# OIL ANALYSIS REPORT

Sample Rating Trend

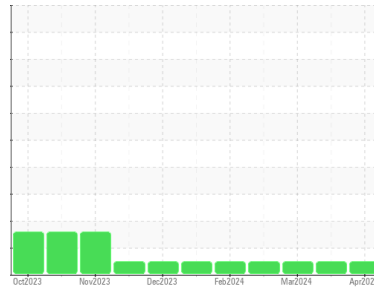

**NORMAL**



Machine Id

**914031**

Component

**Diesel Engine**

Fluid

**DISEL ENGINE OIL SAE 40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0119403</b>	GFL0115357	GFL0115359
Sample Date	Client Info			<b>18 Apr 2024</b>	14 Mar 2024	12 Mar 2024
Machine Age	hrs	Client Info		<b>1525</b>	1343	1327
Oil Age	hrs	Client Info		<b>182</b>	163	147
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>7</b>	31	29
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m	>4	<b>2</b>	5	4
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	3	1
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	1
Copper	ppm	ASTM D5185m	>330	<b>37</b>	150	151
Tin	ppm	ASTM D5185m	>15	<b>1</b>	2	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>21</b>	8	7
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>62</b>	65	61
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m	450	<b>880</b>	1019	924
Calcium	ppm	ASTM D5185m	3000	<b>1074</b>	1215	1081
Phosphorus	ppm	ASTM D5185m	1150	<b>1068</b>	1168	951
Zinc	ppm	ASTM D5185m	1350	<b>1184</b>	1323	1111
Sulfur	ppm	ASTM D5185m	4250	<b>3291</b>	3010	2785




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>5</b>	10	8
Sodium	ppm	ASTM D5185m	>216	<b>&lt;1</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	4	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.5	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.0</b>	9.3	9.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.9</b>	20.5	20.5

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.6</b>	17.3	17.0
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>8.4</b>	6.1	6.4







# OIL ANALYSIS REPORT

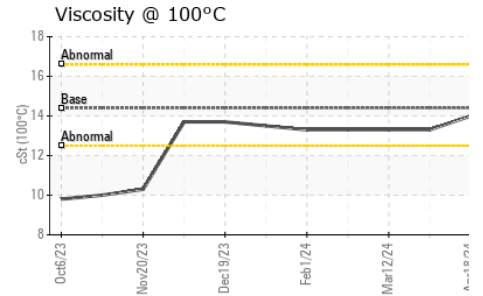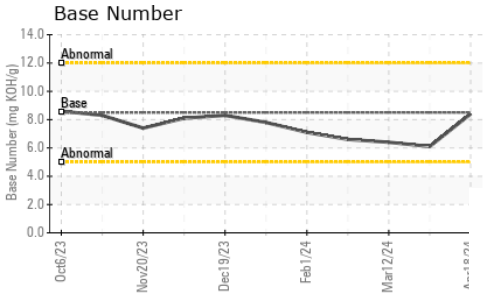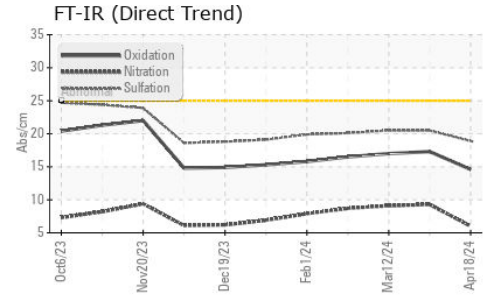

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.0</b>	13.3	13.3

## GRAPHS

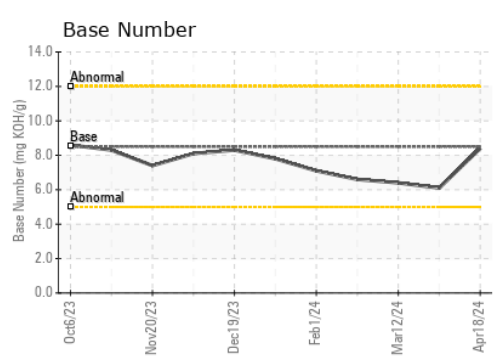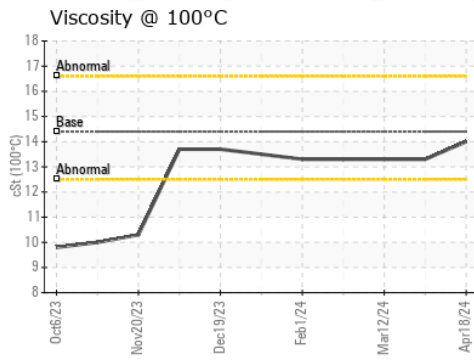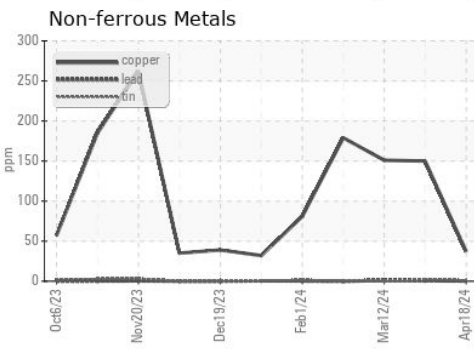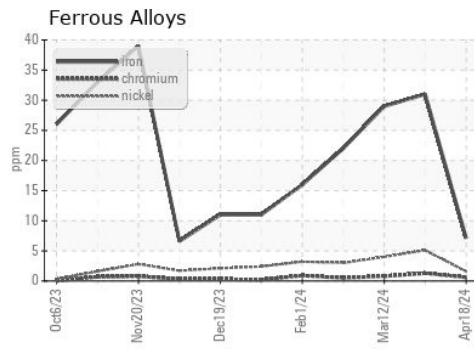

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0119403      **Received** : 22 Apr 2024  
**Lab Number** : **06156753**      **Tested** : 23 Apr 2024  
**Unique Number** : 10992176      **Diagnosed** : 23 Apr 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 814 - Little Rock Hauling**  
 4005 Hwy 161 N.  
 Little Rock, AR  
 US 72117  
 Contact: Michael Lovin  
 mlovin@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)