




# OIL ANALYSIS REPORT

Sample Rating Trend

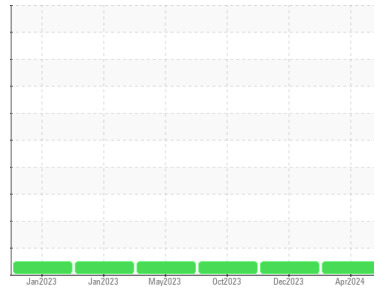

**NORMAL**



Machine Id

**913154**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0114432</b>	GFL0100475	GFL0093277
Sample Date	Client Info		<b>16 Apr 2024</b>	09 Dec 2023	04 Oct 2023
Machine Age	mls	Client Info	<b>72902</b>	3599	3024
Oil Age	mls	Client Info	<b>14245</b>	3599	3024
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>12</b>	10	7
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>5</b>	3	0
Lead	ppm	ASTM D5185m >45	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m >85	<b>2</b>	1	1
Tin	ppm	ASTM D5185m >4	<b>1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	1	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m 60	<b>62</b>	58	64
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>942</b>	970	945
Calcium	ppm	ASTM D5185m 1070	<b>1086</b>	1066	1082
Phosphorus	ppm	ASTM D5185m 1150	<b>1121</b>	1030	1034
Zinc	ppm	ASTM D5185m 1270	<b>1269</b>	1313	1278
Sulfur	ppm	ASTM D5185m 2060	<b>3268</b>	2421	3138

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>5</b>	5	4
Sodium	ppm	ASTM D5185m	<b>0</b>	4	0
Potassium	ppm	ASTM D5185m >20	<b>7</b>	3	4

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	0.4	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.3</b>	9.7	8.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.2</b>	20.5	19.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.4</b>	17.1	16.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.7</b>	7.1	7.3







# OIL ANALYSIS REPORT

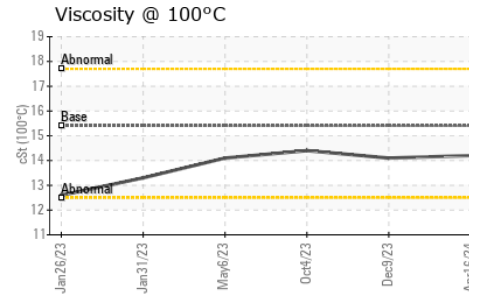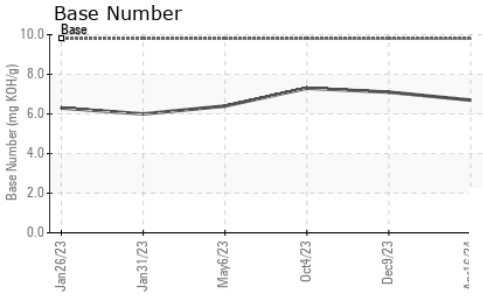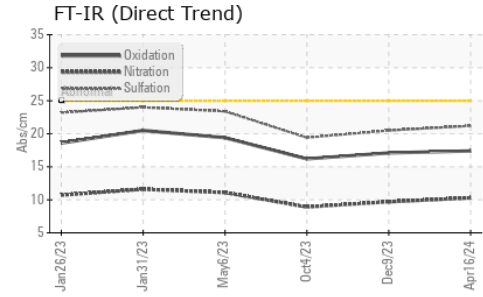

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.2	14.1

## GRAPHS

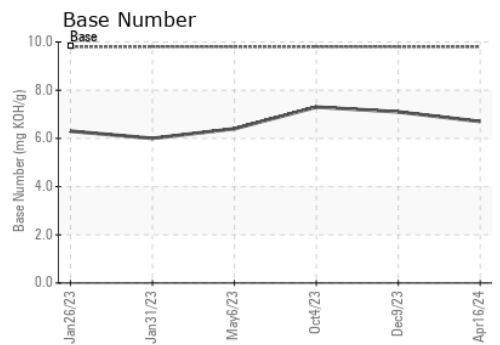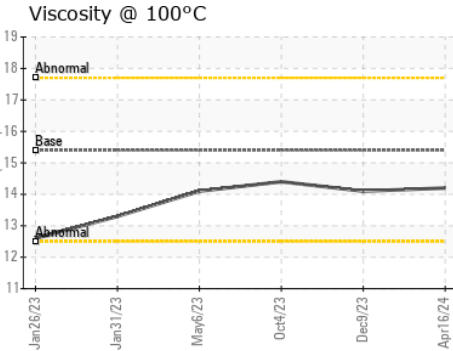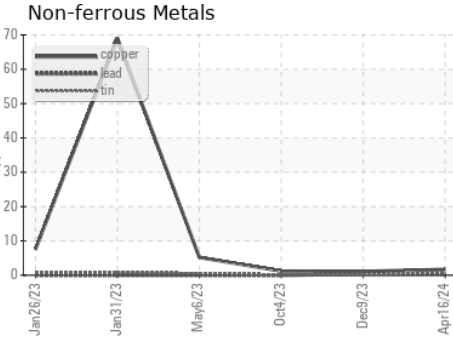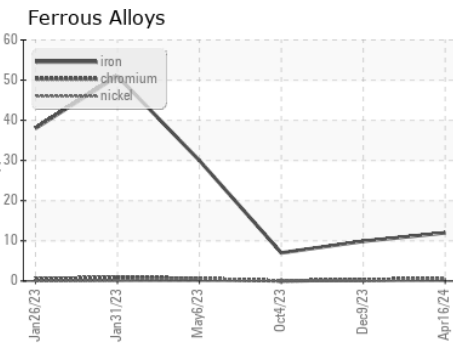

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0114432      **Received** : 22 Apr 2024  
**Lab Number** : 06156765      **Tested** : 23 Apr 2024  
**Unique Number** : 10992188      **Diagnosed** : 23 Apr 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 865 - East Mount Hauling**  
 7213 East Mount Houston Road  
 Houston, TX  
 US 77050  
 Contact: Saul Castillo  
 saul.castillo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)