




PROBLEM SUMMARY

Area
(83J3TW)
 Machine Id
229035-632119
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)




Sample Rating Trend

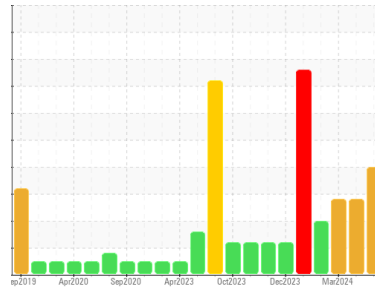

FUEL



COMPONENT CONDITION SUMMARY

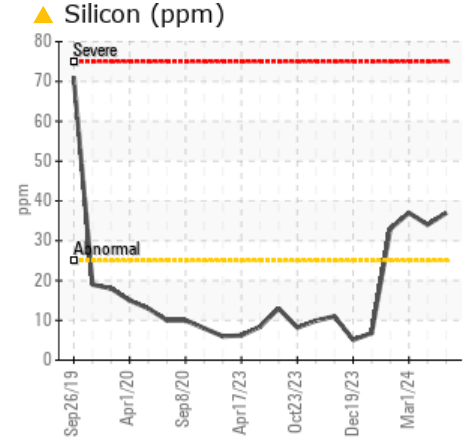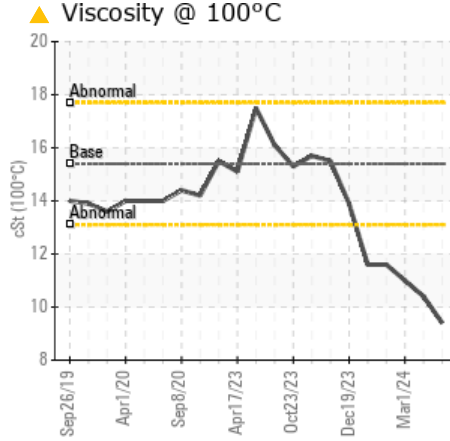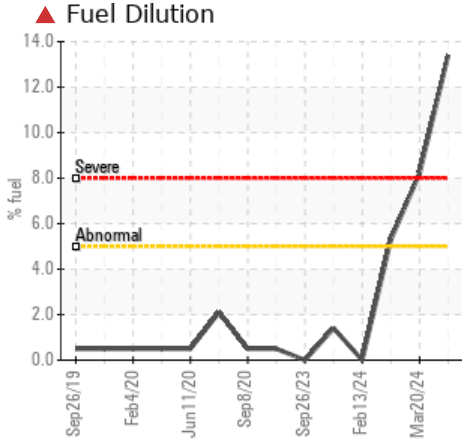

RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	ABNORMAL	ABNORMAL
Silicon	ppm	ASTM D5185m	>25	▲ 37	▲ 34	▲ 37
Fuel	%	ASTM D3524	>5	▲ 13.4	▲ 8.2	▲ 5.3
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 9.4	▲ 10.4	▲ 11.0

Customer Id: GFL837
 Sample No.: GFL0118760
 Lab Number: 06156770
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com


To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Change Filter	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.


HISTORICAL DIAGNOSIS

DIRT




20 Mar 2024 Diag: Jonathan Hester
 We advise that you check the fuel injection system. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Elemental level of silicon (Si) above normal indicating ingress of seal material. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report




DIRT




01 Mar 2024 Diag: Don Baldrige
 We advise that you check the fuel injection system. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of fuel present in the oil. Elemental level of silicon (Si) above normal. Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report




DIRT



13 Feb 2024 Diag: Jonathan Hester
 No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. Elemental level of silicon (Si) above normal indicating ingress of seal material. The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

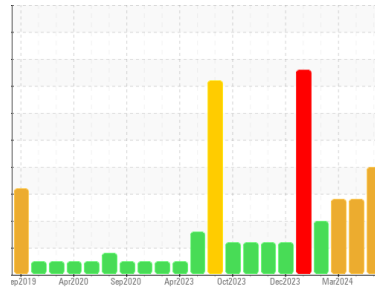

FUEL



Area
(83J3TW)
 Machine Id
229035-632119
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of fuel present in the oil. Elemental level of silicon (Si) above normal indicating ingress of seal material.

▲ Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0118760	GFL0114114	GFL0108052
Sample Date	Client Info	16 Apr 2024	20 Mar 2024	01 Mar 2024
Machine Age	hrs	10793	10617	10483
Oil Age	hrs	10392	10350	0
Oil Changed	Client Info	Not Changed	Not Changed	Not Changed
Sample Status		SEVERE	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	55	40	29
Chromium	ppm	ASTM D5185m >20	2	1	<1
Nickel	ppm	ASTM D5185m >4	1	<1	0
Titanium	ppm	ASTM D5185m	1	0	<1
Silver	ppm	ASTM D5185m >3	<1	0	0
Aluminum	ppm	ASTM D5185m >20	6	4	4
Lead	ppm	ASTM D5185m >40	<1	1	<1
Copper	ppm	ASTM D5185m >330	80	57	14
Tin	ppm	ASTM D5185m >15	2	<1	1
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	8	8	11
Barium	ppm	ASTM D5185m 0	13	14	13
Molybdenum	ppm	ASTM D5185m 60	46	47	48
Manganese	ppm	ASTM D5185m 0	5	4	4
Magnesium	ppm	ASTM D5185m 1010	638	761	753
Calcium	ppm	ASTM D5185m 1070	1163	1339	1245
Phosphorus	ppm	ASTM D5185m 1150	890	866	949
Zinc	ppm	ASTM D5185m 1270	1037	1170	1120
Sulfur	ppm	ASTM D5185m 2060	2636	3199	3238

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	▲ 37	▲ 34	▲ 37
Sodium	ppm	ASTM D5185m	2	3	3
Potassium	ppm	ASTM D5185m >20	9	5	5
Fuel	%	ASTM D3524 >5	▲ 13.4	▲ 8.2	▲ 5.3

INFRA-RED






method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	0.7	0.5	0.4
Nitration	Abs/cm	*ASTM D7624 >20	10.6	9.3	7.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.8	20.8	20.0

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	20.6	17.8	16.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.1	8.1	8.9







OIL ANALYSIS REPORT

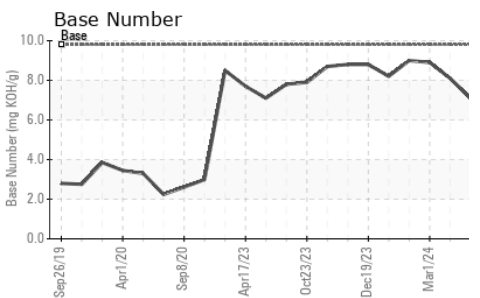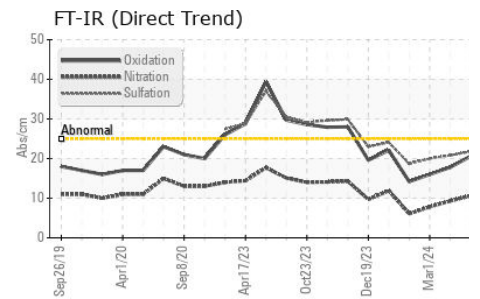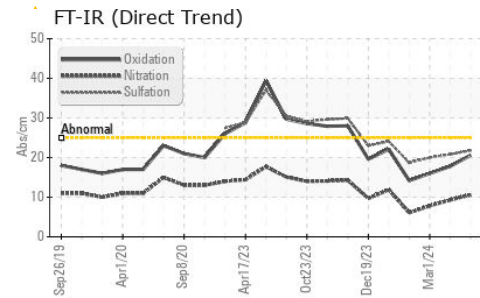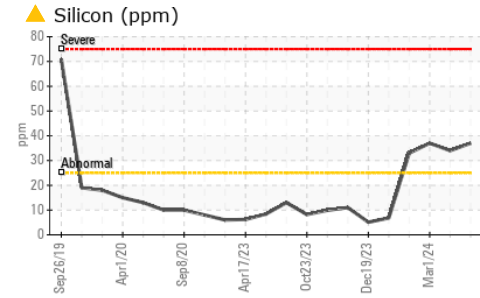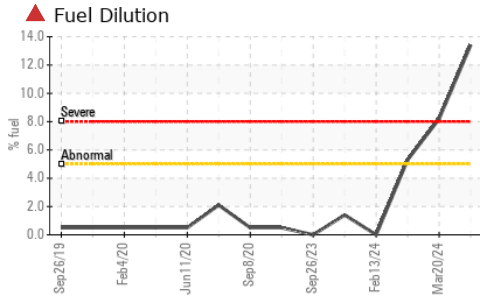

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 9.4	▲ 10.4

GRAPHS

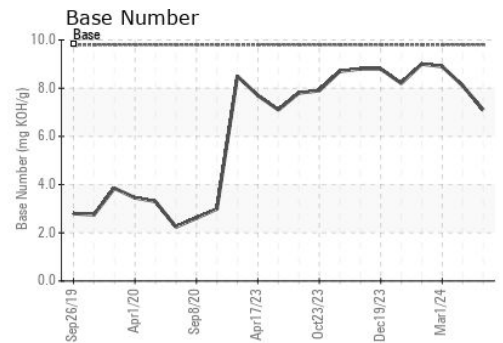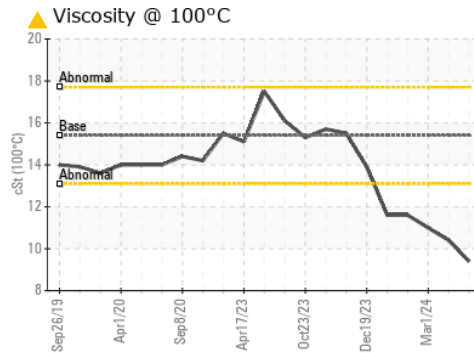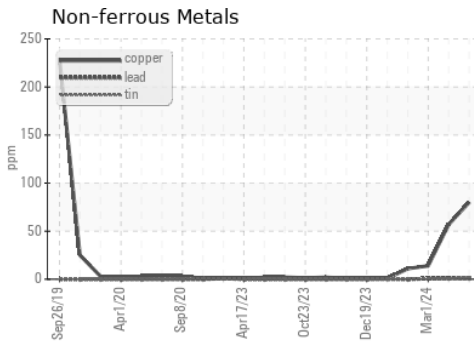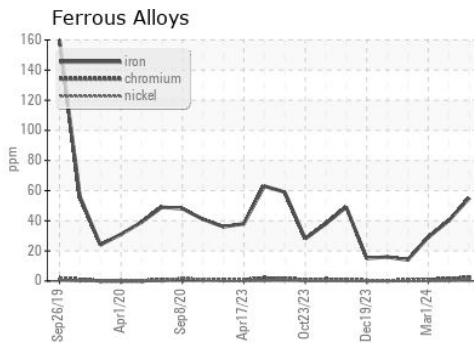

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0118760
Lab Number : 06156770
Unique Number : 10992193
Test Package : FLEET (Additional Tests : PercentFuel)

GFL Environmental - 837 - Harrison TS
 22820 S State Route 291
 Harrisonville, MO
 US 64701
 Contact: SARA PATRICK
 spatrack@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)