




# OIL ANALYSIS REPORT

Sample Rating Trend

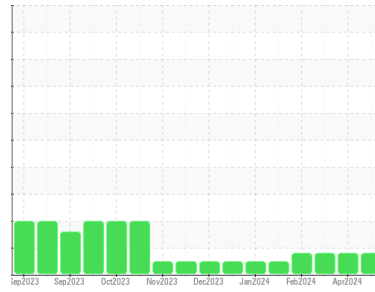

**WEAR**



Machine Id

**914032**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

Valve wear is indicated. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

| method        | limit/base  | current            | history1    | history2    |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | <b>GFL0119389</b>  | GFL0115378  | GFL0115368  |
| Sample Date   | Client Info | <b>18 Apr 2024</b> | 04 Apr 2024 | 20 Mar 2024 |
| Machine Age   | hrs         | <b>1815</b>        | 1705        | 1488        |
| Oil Age       | hrs         | <b>110</b>         | 217         | 148         |
| Oil Changed   | Client Info | <b>Changed</b>     | Changed     | Changed     |
| Sample Status |             | <b>ABNORMAL</b>    | ABNORMAL    | ABNORMAL    |

## CONTAMINATION

| method | limit/base     | current        | history1 | history2 |
|--------|----------------|----------------|----------|----------|
| Fuel   | WC Method >5   | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water  | WC Method >0.2 | <b>NEG</b>     | NEG      | NEG      |
| Glycol | WC Method      | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

| method   | limit/base           | current     | history1 | history2 |
|----------|----------------------|-------------|----------|----------|
| Iron     | ppm ASTM D5185m >100 | <b>49</b>   | 42       | 37       |
| Chromium | ppm ASTM D5185m >20  | <b>1</b>    | <1       | 1        |
| Nickel   | ppm ASTM D5185m >4   | <b>▲ 14</b> | ▲ 14     | ▲ 14     |
| Titanium | ppm ASTM D5185m      | <b>0</b>    | 0        | <1       |
| Silver   | ppm ASTM D5185m >3   | <b>0</b>    | <1       | 0        |
| Aluminum | ppm ASTM D5185m >20  | <b>4</b>    | 4        | 3        |
| Lead     | ppm ASTM D5185m >40  | <b>0</b>    | 0        | <1       |
| Copper   | ppm ASTM D5185m >330 | <b>100</b>  | 94       | 105      |
| Tin      | ppm ASTM D5185m >15  | <b>2</b>    | 2        | 0        |
| Vanadium | ppm ASTM D5185m      | <b>0</b>    | 0        | <1       |
| Cadmium  | ppm ASTM D5185m      | <b>0</b>    | 0        | 0        |

## ADDITIVES

| method     | limit/base           | current     | history1 | history2 |
|------------|----------------------|-------------|----------|----------|
| Boron      | ppm ASTM D5185m 0    | <b>6</b>    | 4        | 4        |
| Barium     | ppm ASTM D5185m 0    | <b>0</b>    | 0        | 0        |
| Molybdenum | ppm ASTM D5185m 60   | <b>66</b>   | 64       | 63       |
| Manganese  | ppm ASTM D5185m 0    | <b>2</b>    | 2        | 2        |
| Magnesium  | ppm ASTM D5185m 1010 | <b>907</b>  | 913      | 952      |
| Calcium    | ppm ASTM D5185m 1070 | <b>1059</b> | 1046     | 1117     |
| Phosphorus | ppm ASTM D5185m 1150 | <b>903</b>  | 912      | 906      |
| Zinc       | ppm ASTM D5185m 1270 | <b>1150</b> | 1174     | 1219     |
| Sulfur     | ppm ASTM D5185m 2060 | <b>2330</b> | 2452     | 2639     |

## CONTAMINANTS

| method    | limit/base          | current   | history1 | history2 |
|-----------|---------------------|-----------|----------|----------|
| Silicon   | ppm ASTM D5185m >25 | <b>14</b> | 13       | 11       |
| Sodium    | ppm ASTM D5185m     | <b>8</b>  | 5        | 10       |
| Potassium | ppm ASTM D5185m >20 | <b>9</b>  | 11       | 9        |

## INFRA-RED






| method    | limit/base               | current     | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot %    | % *ASTM D7844 >3         | <b>1</b>    | 0.9      | 0.7      |
| Nitration | Abs/cm *ASTM D7624 >20   | <b>10.6</b> | 10.3     | 10.0     |
| Sulfation | Abs/.1mm *ASTM D7415 >30 | <b>22.3</b> | 21.6     | 21.2     |

## FLUID DEGRADATION

| method           | limit/base               | current     | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm *ASTM D7414 >25 | <b>18.8</b> | 18.2     | 17.5     |
| Base Number (BN) | mg KOH/g ASTM D2896 9.8  | <b>5.0</b>  | 5.6      | 5.9      |






# OIL ANALYSIS REPORT

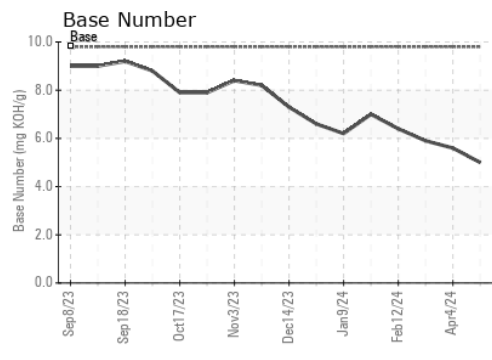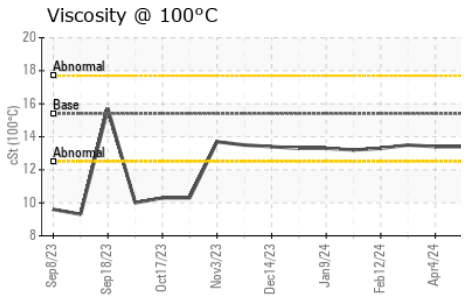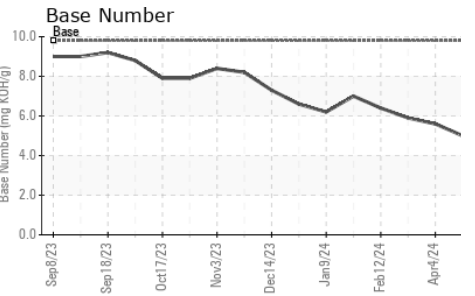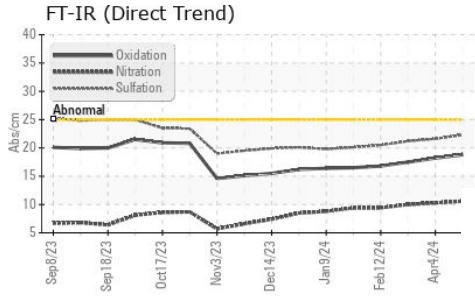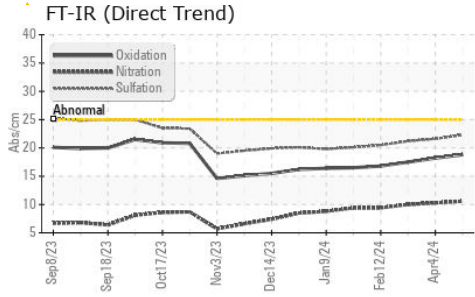

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | 13.4     | 13.5     |

## GRAPHS

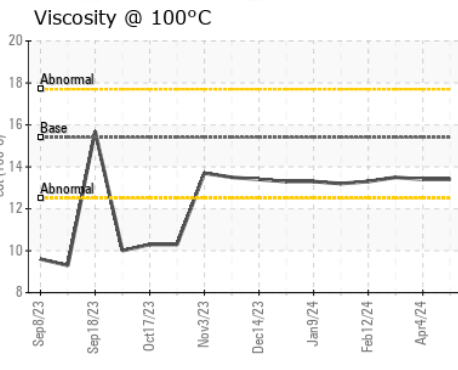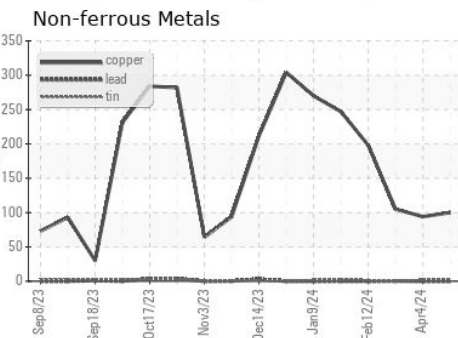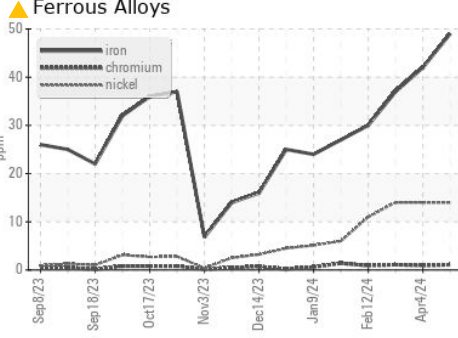

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0119389  
**Lab Number** : 06156779  
**Unique Number** : 10992202  
**Test Package** : FLEET  
**Received** : 22 Apr 2024  
**Tested** : 23 Apr 2024  
**Diagnosed** : 24 Apr 2024 - Sean Felton

**GFL Environmental - 814 - Little Rock Hauling**  
 4005 Hwy 161 N.  
 Little Rock, AR  
 US 72117  
 Contact: Brad Koenig  
 bkoenig@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)