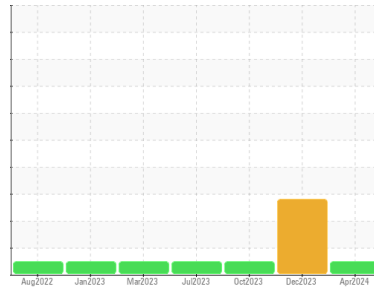


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id
721565
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0123920	PCA0115272	PCA0106270
Sample Date	Client Info		11 Apr 2024	27 Dec 2023	02 Oct 2023
Machine Age	mls	Client Info	288590	254818	226551
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		Not Chngd	Changed	Not Chngd
Sample Status			NORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	60	▲ 137	99
Chromium	ppm	ASTM D5185m >20	3	6	4
Nickel	ppm	ASTM D5185m >4	1	0	1
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m >3	<1	0	<1
Aluminum	ppm	ASTM D5185m >20	7	16	11
Lead	ppm	ASTM D5185m >40	<1	0	<1
Copper	ppm	ASTM D5185m >330	21	23	20
Tin	ppm	ASTM D5185m >15	2	2	1
Vanadium	ppm	ASTM D5185m	<1	0	<1
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	3	5	0
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 50	69	69	73
Manganese	ppm	ASTM D5185m 0	2	2	2
Magnesium	ppm	ASTM D5185m 950	929	989	1090
Calcium	ppm	ASTM D5185m 1050	1119	1265	1350
Phosphorus	ppm	ASTM D5185m 995	942	1143	1238
Zinc	ppm	ASTM D5185m 1180	1252	1359	1596
Sulfur	ppm	ASTM D5185m 2600	2591	2281	2814

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	8	11	10
Sodium	ppm	ASTM D5185m	3	14	12
Potassium	ppm	ASTM D5185m >20	6	12	12

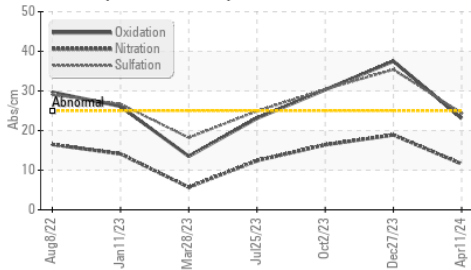
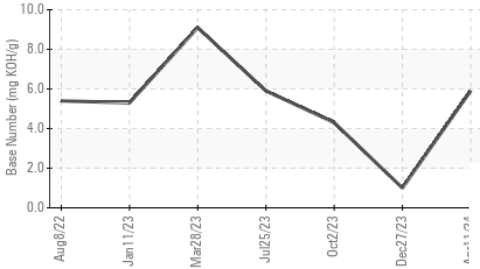
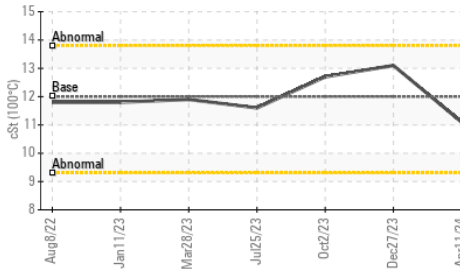
INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	1.6	▲ 3.7	2.6
Nitration	Abs/cm	*ASTM D7624 >20	11.6	18.9	16.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	24.4	35.4	30.4

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	23.1	37.5	30.3
Base Number (BN)	mg KOH/g	ASTM D2896	5.9	▲ 1.0	4.3

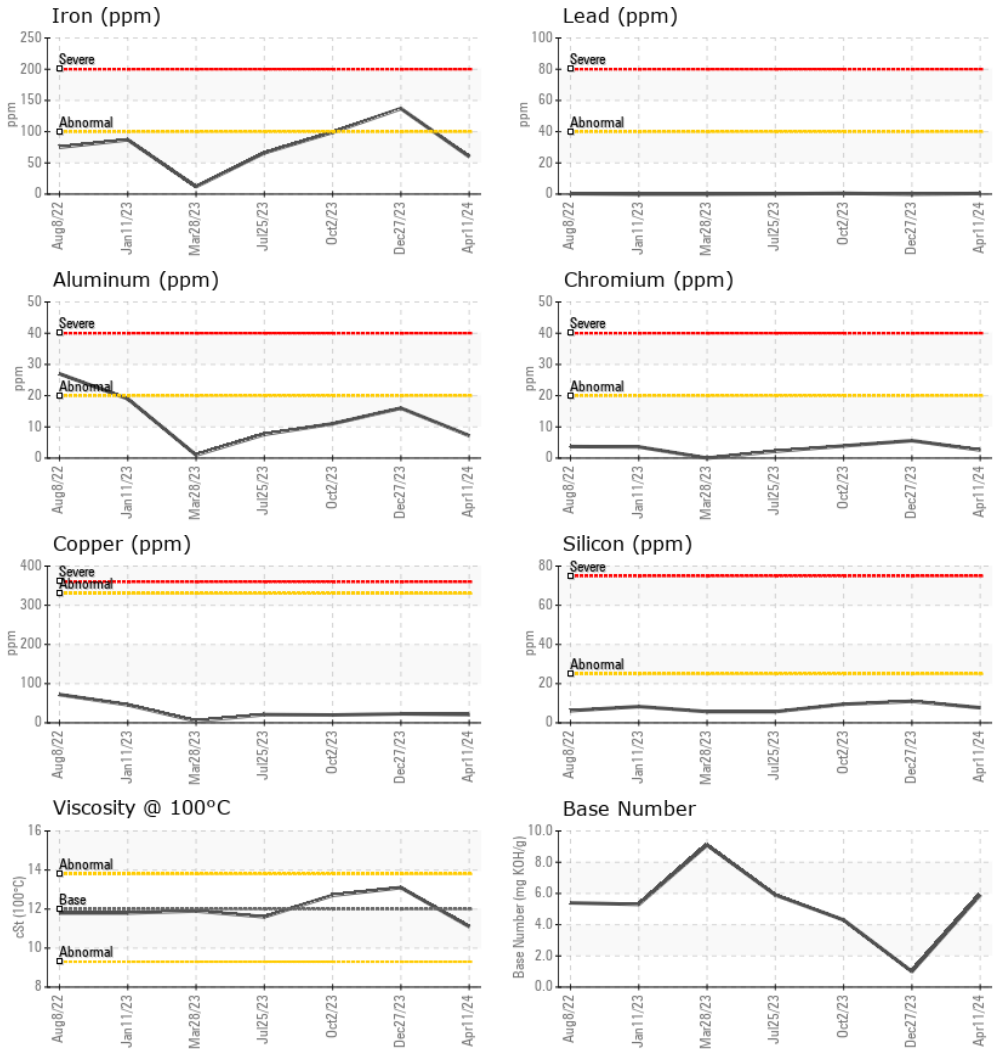
OIL ANALYSIS REPORT

FT-IR (Direct Trend)

Base Number

Viscosity @ 100°C


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.1	13.1

GRAPHS



Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0123920 **Received** : 23 Apr 2024
Lab Number : 06157254 **Tested** : 24 Apr 2024
Unique Number : 10992677 **Diagnosed** : 24 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

MILLER TRUCK LEASING #119
 39 INDUSTRIAL AVE
 HASBROUCK HEIGHTS, NJ
 US 07604
 Contact: MIKE LONGETTE
 mlongette@millertransgroup.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (201)528-7053