




# OIL ANALYSIS REPORT

Sample Rating Trend

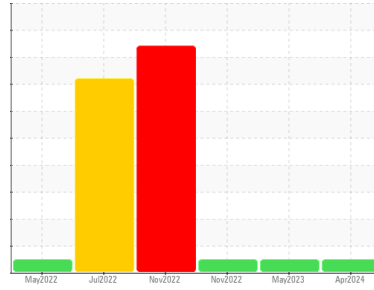

**NORMAL**



Machine Id  
**728059-362001**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>GFL0065701</b>  | GFL0076837  | GFL0054457  |
| Sample Date        | Client Info |             |            | <b>01 Apr 2024</b> | 04 May 2023 | 30 Nov 2022 |
| Machine Age        | hrs         | Client Info |            | <b>0</b>           | 12000       | 9927        |
| Oil Age            | hrs         | Client Info |            | <b>0</b>           | 200         | 0           |
| Oil Changed        | Client Info |             |            | <b>Not Changed</b> | N/A         | Not Changed |
| Sample Status      |             |             |            | <b>NORMAL</b>      | NORMAL      | NORMAL      |

| CONTAMINATION |           | method | limit/base | current        | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel          | WC Method | >5     |            | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water         | WC Method | >0.2   |            | <b>NEG</b>     | NEG      | NEG      |
| Glycol        | WC Method |        |            | <b>NEG</b>     | NEG      | NEG      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >100       | <b>31</b>    | 4        | 5        |
| Chromium    | ppm | ASTM D5185m | >20        | <b>&lt;1</b> | <1       | <1       |
| Nickel      | ppm | ASTM D5185m | >4         | <b>0</b>     | 0        | <1       |
| Titanium    | ppm | ASTM D5185m |            | <b>0</b>     | 0        | 0        |
| Silver      | ppm | ASTM D5185m | >3         | <b>0</b>     | 0        | <1       |
| Aluminum    | ppm | ASTM D5185m | >20        | <b>&lt;1</b> | 0        | 3        |
| Lead        | ppm | ASTM D5185m | >40        | <b>0</b>     | <1       | <1       |
| Copper      | ppm | ASTM D5185m | >330       | <b>12</b>    | 0        | 1        |
| Tin         | ppm | ASTM D5185m | >15        | <b>0</b>     | 0        | <1       |
| Vanadium    | ppm | ASTM D5185m |            | <b>0</b>     | 0        | <1       |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | <1       |

| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m | 0          | <b>0</b>     | 1        | 57       |
| Barium     | ppm | ASTM D5185m | 0          | <b>&lt;1</b> | 0        | 0        |
| Molybdenum | ppm | ASTM D5185m | 60         | <b>64</b>    | 59       | 78       |
| Manganese  | ppm | ASTM D5185m | 0          | <b>&lt;1</b> | <1       | <1       |
| Magnesium  | ppm | ASTM D5185m | 1010       | <b>978</b>   | 906      | 161      |
| Calcium    | ppm | ASTM D5185m | 1070       | <b>1071</b>  | 1033     | 2156     |
| Phosphorus | ppm | ASTM D5185m | 1150       | <b>1050</b>  | 996      | 1048     |
| Zinc       | ppm | ASTM D5185m | 1270       | <b>1316</b>  | 1233     | 1294     |
| Sulfur     | ppm | ASTM D5185m | 2060       | <b>3709</b>  | 3160     | 4303     |

| CONTAMINANTS |     | method      | limit/base | current      | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >25        | <b>4</b>     | 3        | 4        |
| Sodium       | ppm | ASTM D5185m |            | <b>2</b>     | 2        | <1       |
| Potassium    | ppm | ASTM D5185m | >20        | <b>&lt;1</b> | <1       | 1        |


| INFRA-RED |          | method      | limit/base | current     | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 | >3         | <b>0.2</b>  | 0.1      | 0.6      |
| Nitration | Abs/cm   | *ASTM D7624 | >20        | <b>7.4</b>  | 5.2      | 8.7      |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30        | <b>18.5</b> | 16.3     | 21.0     |

| FLUID DEGRADATION |          | method      | limit/base | current     | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation         | Abs/.1mm | *ASTM D7414 | >25        | <b>14.6</b> | 12.9     | 16.5     |
| Base Number (BN)  | mg KOH/g | ASTM D2896  | 9.8        | <b>9.4</b>  | 7.6      | 9.3      |




# OIL ANALYSIS REPORT


### FT-IR (Direct Trend)

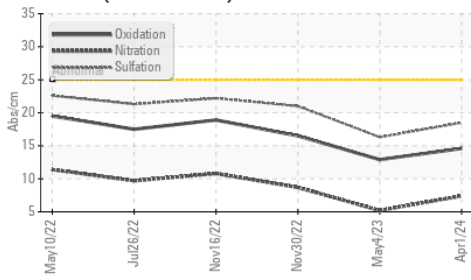

### Base Number

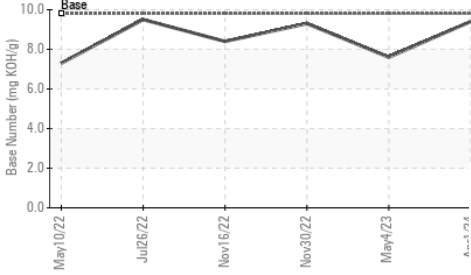

### Viscosity @ 100°C

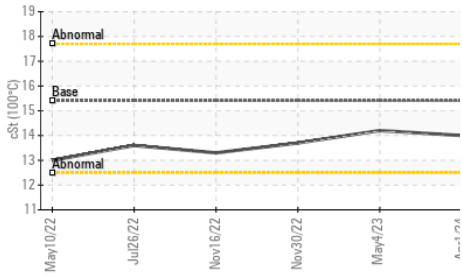


| PARAMETER        | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.4    | 14.0     | 14.2     |

### GRAPHS


#### Ferrous Alloys

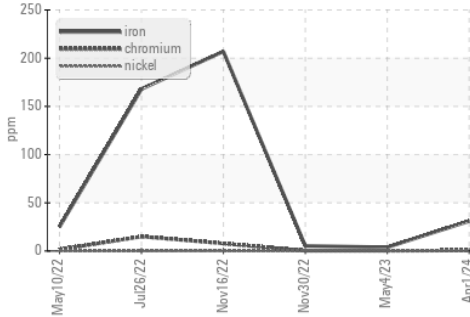


#### Non-ferrous Metals

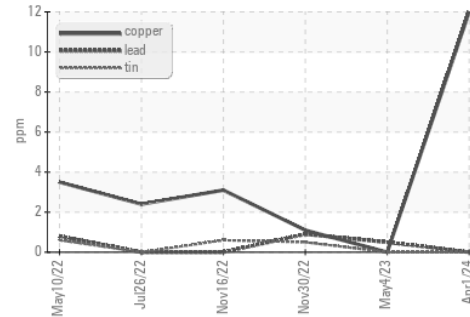

#### Viscosity @ 100°C

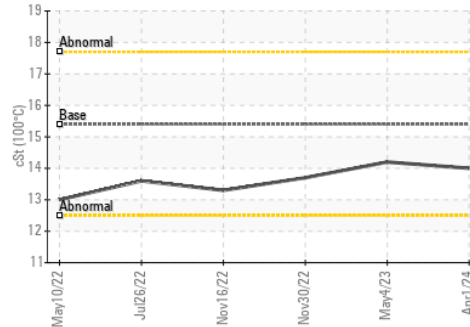

#### Base Number

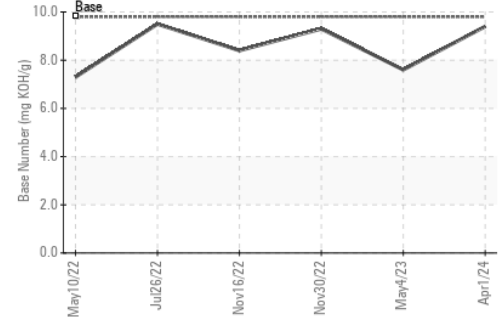

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0065701  
**Lab Number** : 06157489  
**Unique Number** : 10992912  
**Test Package** : FLEET

**Received** : 23 Apr 2024  
**Tested** : 24 Apr 2024  
**Diagnosed** : 24 Apr 2024 - Wes Davis

**GFL Environmental - 823 - Central Missouri Hauling**  
 24461 Oak Grove Lane  
 Sedalia, MO  
 US 65301

Contact: Terry Randolph  
 trandolph@gflenv.com  
 T: (660)631-2116

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)