




# OIL ANALYSIS REPORT

Sample Rating Trend

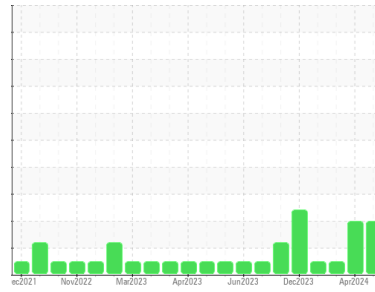

WEAR



Machine Id  
**424057-19**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check the fuel injection system. Resample at the next service interval to monitor.

### Wear

Valve wear is indicated.

### Contamination

There is a moderate amount of fuel present in the oil.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0118637</b>	GFL0110619	GFL0100209
Sample Date	Client Info	<b>16 Apr 2024</b>	04 Apr 2024	09 Feb 2024
Machine Age	hrs	<b>22040</b>	21947	21607
Oil Age	hrs	<b>400</b>	200	400
Oil Changed	Client Info	<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status		<b>ABNORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>13</b>	14	5
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >5	<b>▲ 5</b>	▲ 8	2
Titanium	ppm ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>4</b>	4	1
Lead	ppm ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm ASTM D5185m >330	<b>3</b>	2	<1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>0</b>	0	<1
Barium	ppm ASTM D5185m 0	<b>0</b>	0	8
Molybdenum	ppm ASTM D5185m 60	<b>59</b>	61	55
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm ASTM D5185m 1010	<b>955</b>	1090	836
Calcium	ppm ASTM D5185m 1070	<b>1075</b>	1193	969
Phosphorus	ppm ASTM D5185m 1150	<b>995</b>	1103	867
Zinc	ppm ASTM D5185m 1270	<b>1234</b>	1420	1064
Sulfur	ppm ASTM D5185m 2060	<b>2965</b>	3560	2887

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>7</b>	7	4
Sodium	ppm ASTM D5185m	<b>4</b>	4	0
Potassium	ppm ASTM D5185m >20	<b>0</b>	2	1
Fuel	% ASTM D3524 >3.0	<b>▲ 4.8</b>	▲ 4.5	<1.0

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0.2</b>	0.2	0.1
Nitration	Abs/cm *ASTM D7624 >20	<b>8.3</b>	8.4	6.5
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.4</b>	20.1	17.5


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>17.3</b>	17.3	14.2
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>6.2</b>	6.1	7.0




# OIL ANALYSIS REPORT


## Fuel Dilution

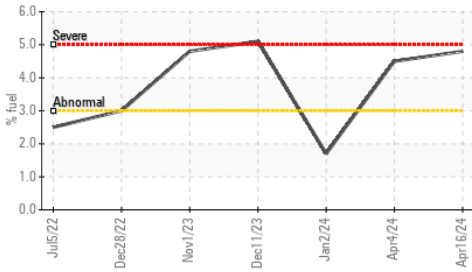


## FT-IR (Direct Trend)

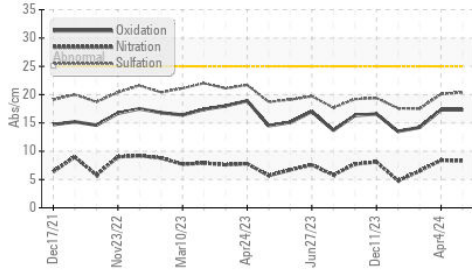


## Ferrous Alloys

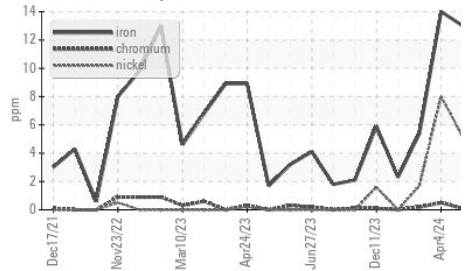

## FT-IR (Direct Trend)

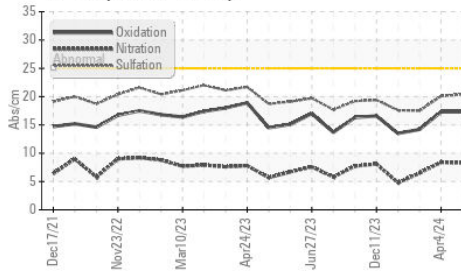

## Base Number

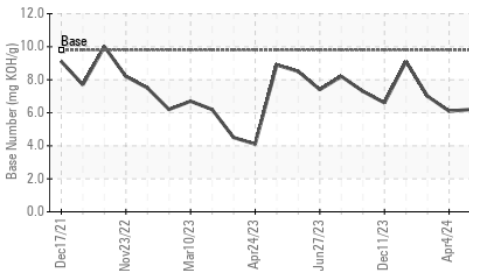

## VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

## FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 12.1	▲ 11.9

## GRAPHS


### Ferrous Alloys

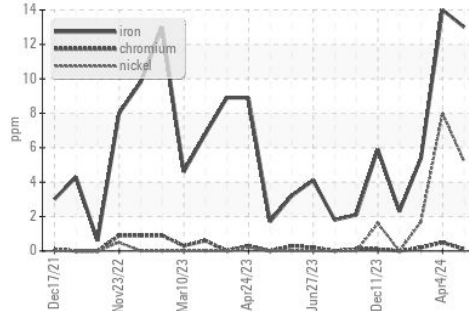


### Non-ferrous Metals

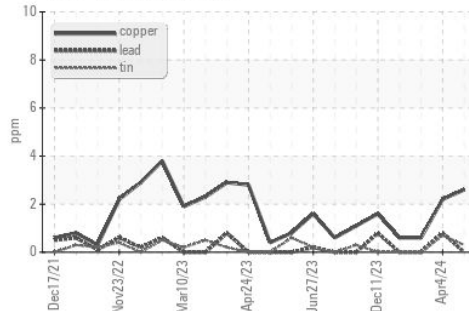

### Viscosity @ 100°C

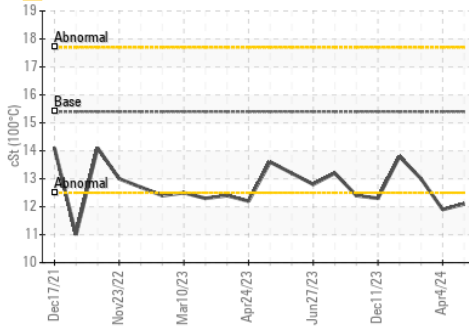

### Base Number

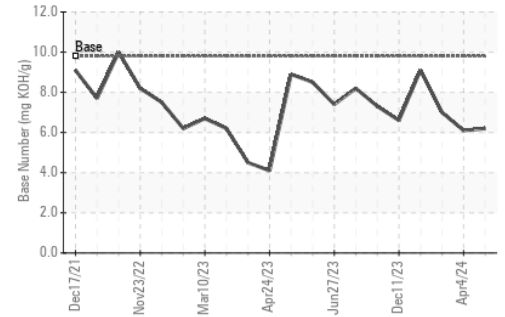

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0118637

Lab Number : 06158327

Unique Number : 10993750

Test Package : FLEET ( Additional Tests: PercentFuel )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 23 Apr 2024

Tested : 25 Apr 2024

Diagnosed : 25 Apr 2024 - Sean Felton

GFL Environmental - 166 - Phenix City

18 Old Brickyard Rd

Phenix City, AL

US 36869

Contact: DARRIN WRIGHT

darrin.wright@gflen.com

T:

F: