


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

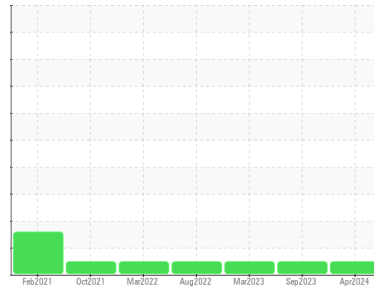

Machine Id  
**DT760**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0091261</b>	PCA0103248	PCA0091253
Sample Date	Client Info			<b>17 Apr 2024</b>	15 Sep 2023	28 Mar 2023
Machine Age	mls Client Info			<b>179366</b>	152645	127511
Oil Age	mls Client Info			<b>179366</b>	25134	127511
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0	
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG	
Glycol	WC Method		<b>NEG</b>	NEG	NEG	

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>120	<b>19</b>	14	22
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	<1	2
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	4	5
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	3	1
Copper	ppm	ASTM D5185m	>330	<b>3</b>	4	10
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	1	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>3</b>	2	<1
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>64</b>	66	65
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	950	<b>933</b>	903	891
Calcium	ppm	ASTM D5185m	1050	<b>1102</b>	1188	1088
Phosphorus	ppm	ASTM D5185m	995	<b>977</b>	983	915
Zinc	ppm	ASTM D5185m	1180	<b>1234</b>	1284	1207
Sulfur	ppm	ASTM D5185m	2600	<b>2905</b>	3067	2426

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>7</b>	6	8
Sodium	ppm	ASTM D5185m		<b>5</b>	4	6
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	4	6

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>4	<b>0.7</b>	0.5	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.5</b>	9.7	10.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.1</b>	20.7	22.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.8</b>	15.9	18.2
Base Number (BN)	mg KOH/g	ASTM D2896		<b>4.4</b>	5.4	4.6





# OIL ANALYSIS REPORT

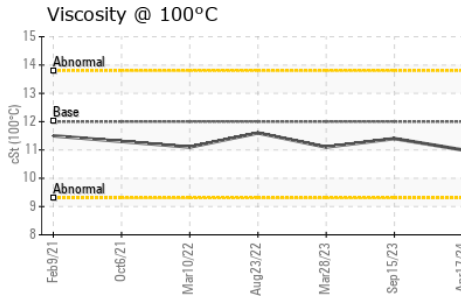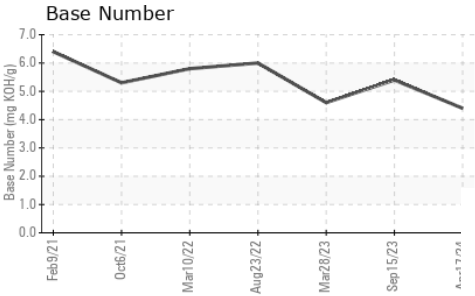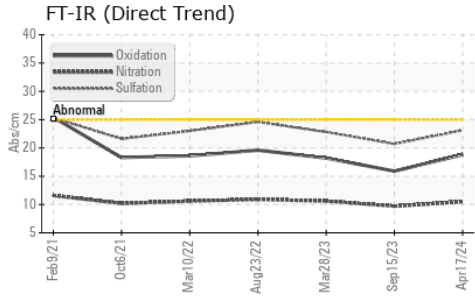

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.0	11.4

## GRAPHS

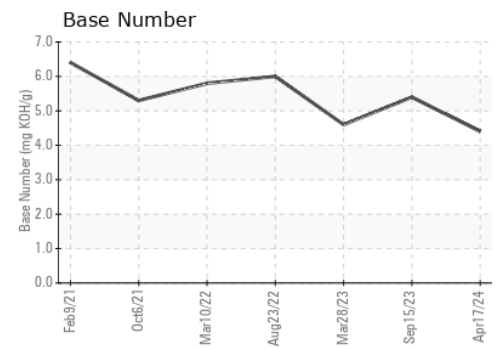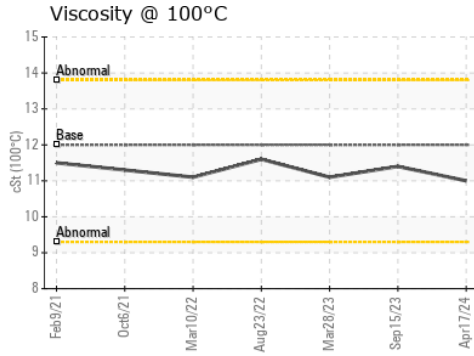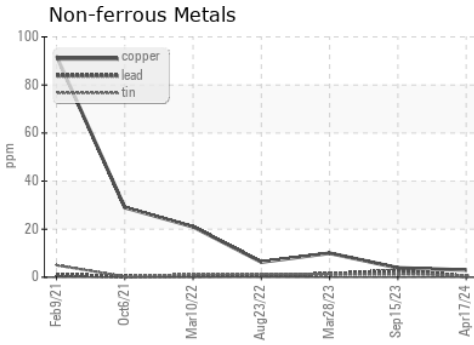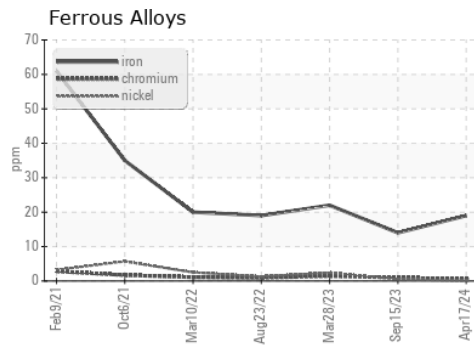

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0091261  
**Lab Number** : 06158332  
**Unique Number** : 10993755  
**Test Package** : FLEET

**Received** : 23 Apr 2024  
**Tested** : 24 Apr 2024  
**Diagnosed** : 24 Apr 2024 - Wes Davis

**NW WHITE & CO - ANDERSON DIVISION**  
 2605 RIVER RD  
 PIEDMONT, SC  
 US 29673  
 Contact: James Threatt  
 jthreatt@nwwhite.com  
 T: (864)918-4646  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)