


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

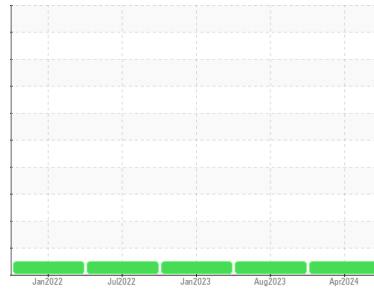

Machine Id
DT808
 Component
Transmission (Auto)
 Fluid
SHELL SPIRAX S6 ATF (36 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0091257	PCA0103270	PCA0091224
Sample Date	Client Info			09 Apr 2024	28 Aug 2023	25 Jan 2023
Machine Age	mls	Client Info		128874	102091	76142
Oil Age	mls	Client Info		102925	25949	76142
Oil Changed	Client Info			Not Changed	Not Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	NEG	NEG


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>300	54	42	81
Chromium	ppm	ASTM D5185m	>2	0	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>70	29	22	39
Lead	ppm	ASTM D5185m	>85	19	15	38
Copper	ppm	ASTM D5185m	>90	33	21	20
Tin	ppm	ASTM D5185m	>10	3	3	7
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		84	97	98
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		6	7	1
Manganese	ppm	ASTM D5185m		0	<1	2
Magnesium	ppm	ASTM D5185m		47	59	<1
Calcium	ppm	ASTM D5185m		193	204	63
Phosphorus	ppm	ASTM D5185m		308	335	250
Zinc	ppm	ASTM D5185m		83	86	3
Sulfur	ppm	ASTM D5185m		2301	2748	1085

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	3	3	6
Sodium	ppm	ASTM D5185m		5	3	6
Potassium	ppm	ASTM D5185m	>20	1	2	5

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

OIL ANALYSIS REPORT



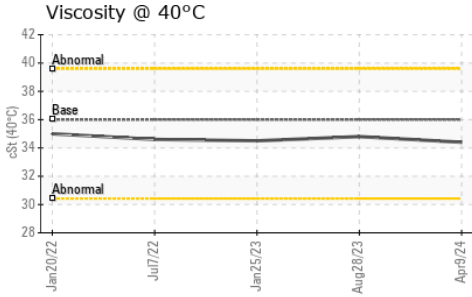


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 36	34.4	34.8	34.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color	no image	no image	no image
Bottom	no image	no image	no image

GRAPHS

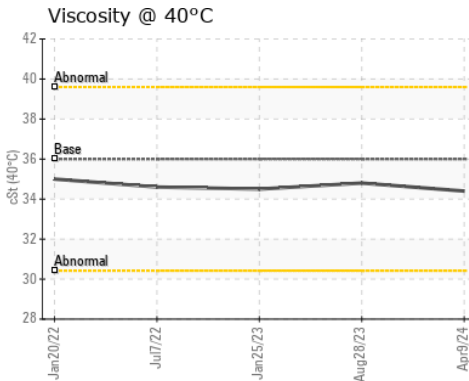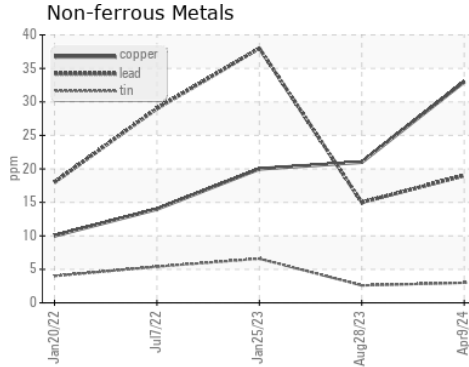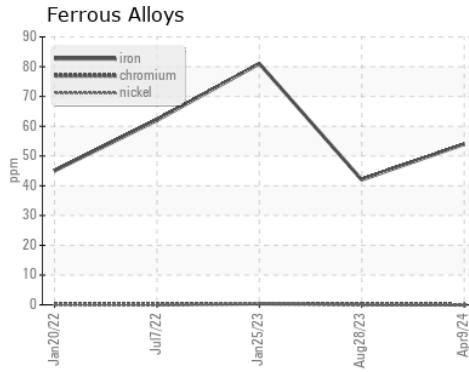

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0091257
Lab Number : 06158618
Unique Number : 10994041
Test Package : FLEET
Received : 23 Apr 2024
Tested : 24 Apr 2024
Diagnosed : 25 Apr 2024 - Jonathan Hester

NW WHITE & CO - ANDERSON DIVISION
 2605 RIVER RD
 PIEDMONT, SC
 US 29673
 Contact: James Threatt
 jthreatt@nwwhite.com
 T: (864)918-4646
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)