




OIL ANALYSIS REPORT

Sample Rating Trend

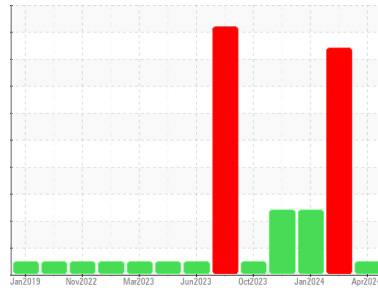

NORMAL



Machine Id
928081-260347

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

No evidence of coolant present in the oil. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | GFL0104822 | GFL0104785 | GFL0088133 |
| Sample Date | Client Info | | 15 Apr 2024 | 22 Feb 2024 | 19 Jan 2024 |
| Machine Age | mls | Client Info | 130426 | 29738 | 128140 |
| Oil Age | mls | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | Changed | N/A | Not Changd |
| Sample Status | | | NORMAL | SEVERE | ABNORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|-------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >5 | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|------------------|----------|----------|----------|
| Iron | ppm | ASTM D5185m >100 | 1 | 36 | 33 |
| Chromium | ppm | ASTM D5185m >20 | 0 | 3 | 2 |
| Nickel | ppm | ASTM D5185m >4 | 0 | <1 | 0 |
| Titanium | ppm | ASTM D5185m | 0 | <1 | 0 |
| Silver | ppm | ASTM D5185m >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >20 | 0 | 6 | 4 |
| Lead | ppm | ASTM D5185m >40 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m >330 | 0 | 7 | 7 |
| Tin | ppm | ASTM D5185m >15 | 0 | <1 | 0 |
| Vanadium | ppm | ASTM D5185m | 0 | <1 | 0 |
| Cadmium | ppm | ASTM D5185m | 0 | <1 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|------------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m 0 | 0 | 3 | 1 |
| Barium | ppm | ASTM D5185m 0 | 0 | 0 | <1 |
| Molybdenum | ppm | ASTM D5185m 60 | 66 | 128 | 134 |
| Manganese | ppm | ASTM D5185m 0 | 0 | 1 | <1 |
| Magnesium | ppm | ASTM D5185m 1010 | 1039 | 950 | 915 |
| Calcium | ppm | ASTM D5185m 1070 | 1178 | 1022 | 1087 |
| Phosphorus | ppm | ASTM D5185m 1150 | 1111 | 1047 | 995 |
| Zinc | ppm | ASTM D5185m 1270 | 1401 | 1271 | 1282 |
| Sulfur | ppm | ASTM D5185m 2060 | 4047 | 3170 | 3000 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|------------|----------|----------|
| Silicon | ppm | ASTM D5185m >25 | 2 | 12 | 11 |
| Sodium | ppm | ASTM D5185m | 49 | 778 | 841 |
| Potassium | ppm | ASTM D5185m >20 | 5 | 159 | 177 |
| Glycol | % | *ASTM D2982 | NEG | 0.10 | NEG |

INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 >3 | 0.1 | 0.8 | 0.7 |
| Nitration | Abs/cm | *ASTM D7624 >20 | 4.5 | 10.3 | 11.1 |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | 17.2 | 21.8 | 21.4 |


FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 >25 | 12.7 | 16.8 | 16.5 |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.8 | 9.2 | 8.9 | 10.0 |




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

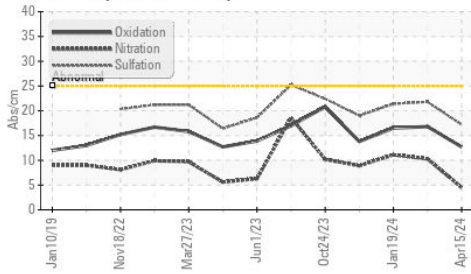


Glycol Contamination

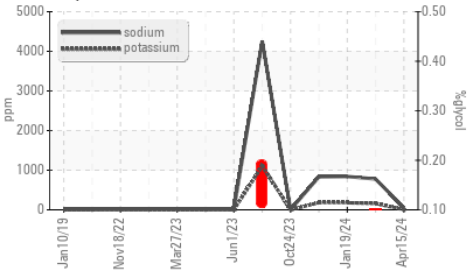


Viscosity @ 100°C

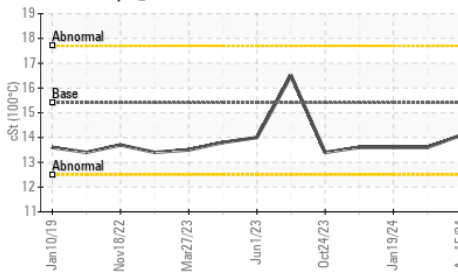

Glycol Contamination

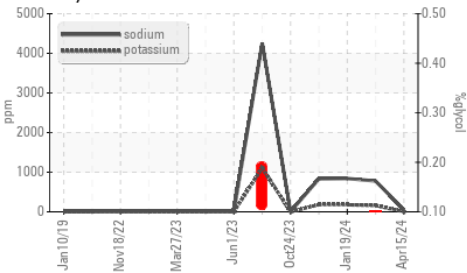

Viscosity @ 100°C

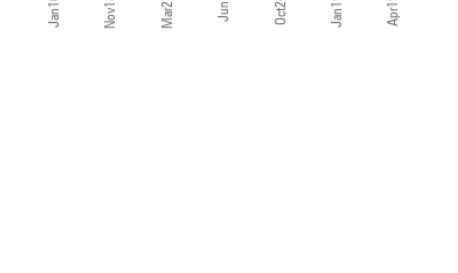


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|-------------|----------|------|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 14.1 | 13.6 | 13.6 |

GRAPHS


Ferrous Alloys

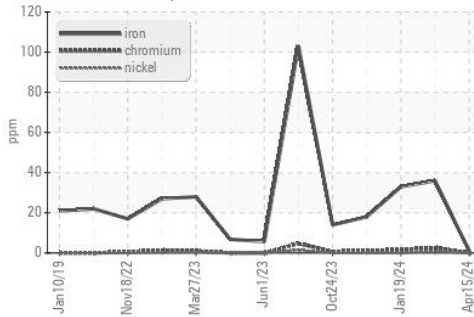

Non-ferrous Metals

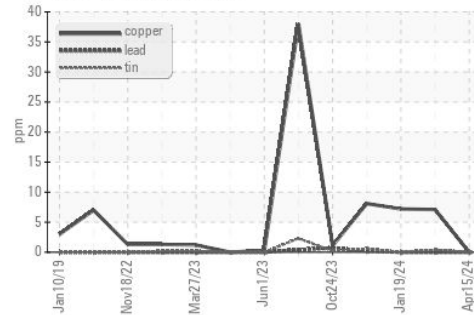

Base Number

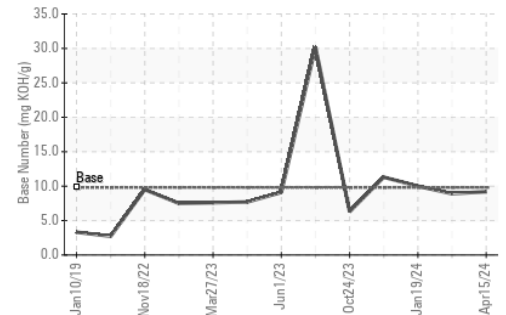

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0104822
Lab Number : **06158731**
Unique Number : 10994154
Test Package : FLEET

Received : 24 Apr 2024
Tested : 26 Apr 2024
Diagnosed : 26 Apr 2024 - Jonathan Hester

GFL Environmental - 820 - Joplin Hauling
 3700 West 7th Street
 Joplin, MO
 US 64801

Contact: James Jarrett
 jjarrett@gflenv.com
 T: (417)310-2802

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)