




OIL ANALYSIS REPORT



Machine Id
414063
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

Sample Rating Trend

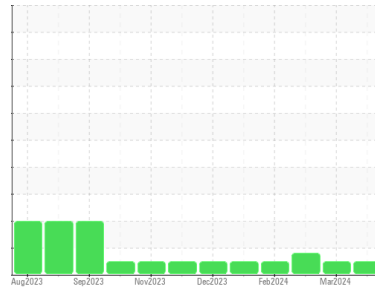

NORMAL

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			GFL0115777	GFL0103461	GFL0103457
Sample Date	Client Info			16 Apr 2024	29 Mar 2024	08 Mar 2024
Machine Age	hrs	Client Info		1837	1717	1586
Oil Age	hrs	Client Info		251	131	1586
Oil Changed	Client Info			N/A	Not Changd	Changed
Sample Status				NORMAL	NORMAL	ATTENTION

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>120	4	4	11
Chromium	ppm	ASTM D5185m	>20	0	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	<1	<1
Titanium	ppm	ASTM D5185m	>2	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>20	<1	2	4
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	32	36	226
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	12	21	18
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	75	79	76
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	450	929	830	836
Calcium	ppm	ASTM D5185m	3000	1245	1129	1082
Phosphorus	ppm	ASTM D5185m	1150	1031	855	914
Zinc	ppm	ASTM D5185m	1350	1277	1076	1115
Sulfur	ppm	ASTM D5185m	4250	3567	2587	2673




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	3	5	7
Sodium	ppm	ASTM D5185m	>158	1	3	2
Potassium	ppm	ASTM D5185m	>20	2	2	8

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>4	0.2	0.1	0.3
Nitration	Abs/cm	*ASTM D7624	>20	6.1	5.3	7.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.5	17.6	19.3

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.7	13.1	15.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.8	8.3	7.1







OIL ANALYSIS REPORT

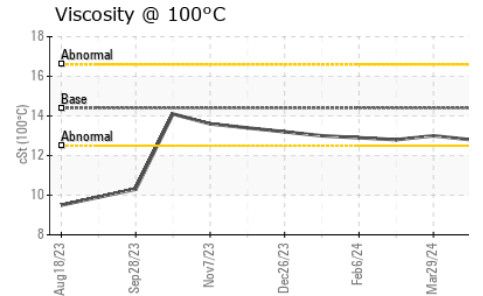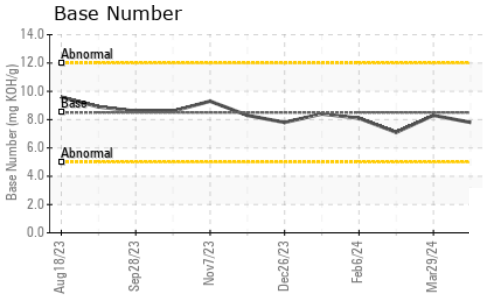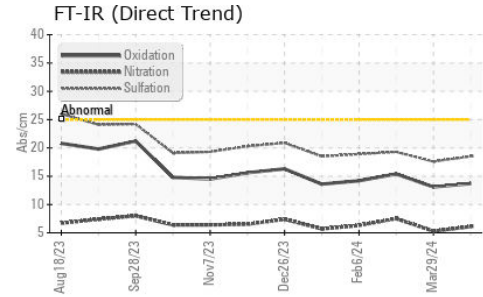

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	12.8	13.0	12.8

GRAPHS

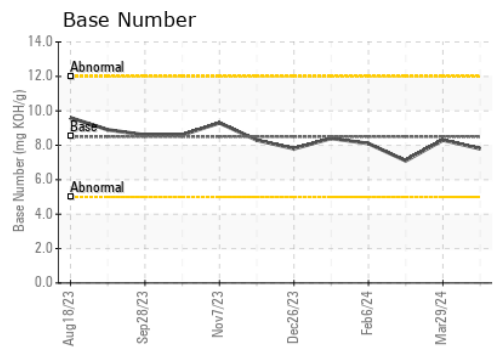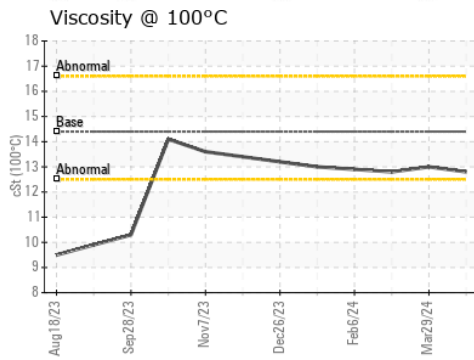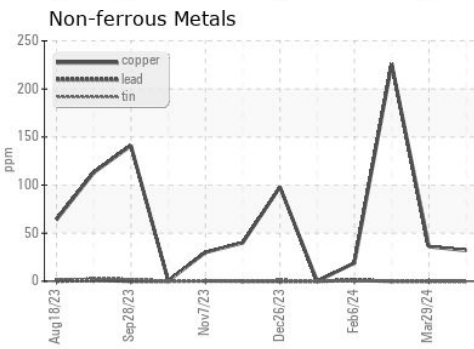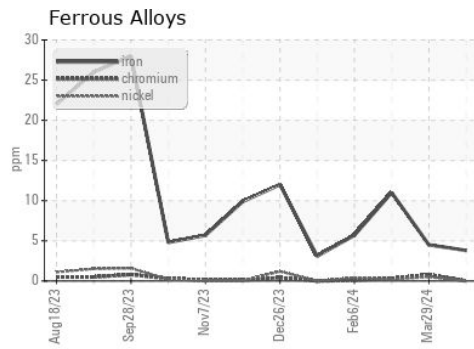

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0115777
Lab Number : **06158748**
Unique Number : 10994171
Test Package : FLEET
Received : 24 Apr 2024
Tested : 25 Apr 2024
Diagnosed : 25 Apr 2024 - Wes Davis

GFL Environmental - 180 - Tuscaloosa Hauling
 4701 12TH ST NE
 Tuscaloosa, AL
 US 35404
 Contact: FREDERICK ROGERS
 fred.rogers@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)