


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

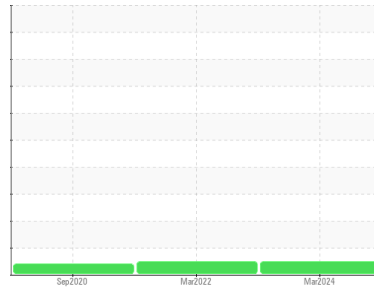

Area
(P172518) 600HP
 Machine Id
530729 [600HP]
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0101219	PCA0055652	PCA0027329
Sample Date	Client Info		18 Mar 2024	30 Mar 2022	03 Sep 2020
Machine Age	hrs	Client Info	42304	36084	29403
Oil Age	hrs	Client Info	3000	3000	2277
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	ATTENTION

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	27	21	23
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >4	0	<1	0
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	4	3	<1
Lead	ppm	ASTM D5185m >40	0	<1	<1
Copper	ppm	ASTM D5185m >330	1	<1	<1
Tin	ppm	ASTM D5185m >15	0	<1	<1
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	21	6	30
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	63	61	57
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	992	1034	834
Calcium	ppm	ASTM D5185m	1204	1299	1428
Phosphorus	ppm	ASTM D5185m	1111	1122	1010
Zinc	ppm	ASTM D5185m	1371	1400	1167
Sulfur	ppm	ASTM D5185m	3453	2833	2648

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	5	3	5
Sodium	ppm	ASTM D5185m	2	4	7
Potassium	ppm	ASTM D5185m >20	0	4	1




INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	1.5	1.4	2.4
Nitration	Abs/cm	*ASTM D7624 >20	12.3	12.1	14.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	25.0	24.8	30.6

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	24.9	23.4	29.3
Base Number (BN)	mg KOH/g	ASTM D2896 10.5	8.9	10.5	9.2





OIL ANALYSIS REPORT

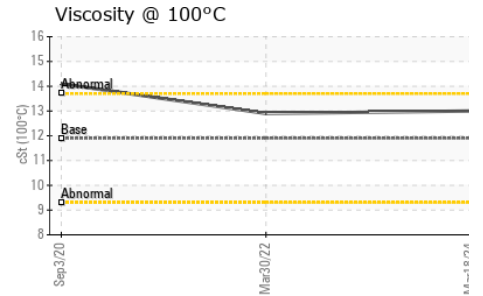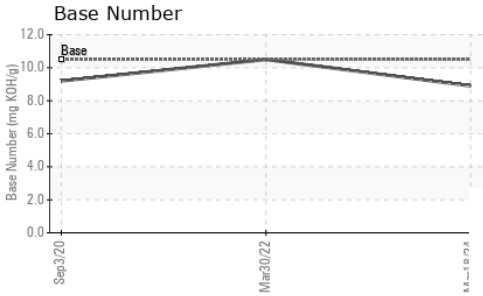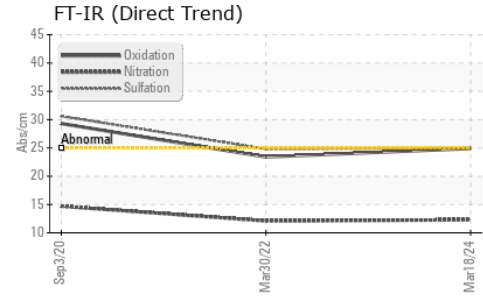

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.9	13.0	12.9

GRAPHS

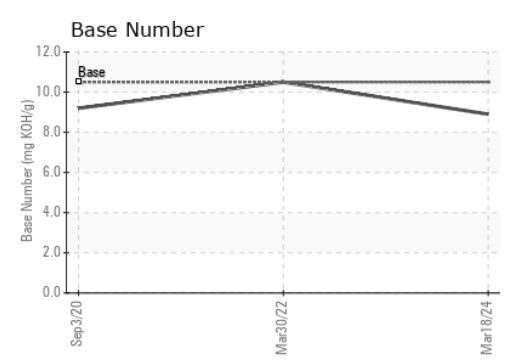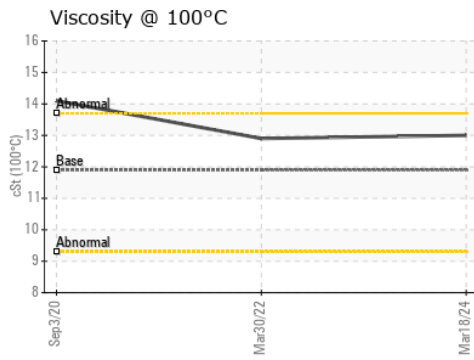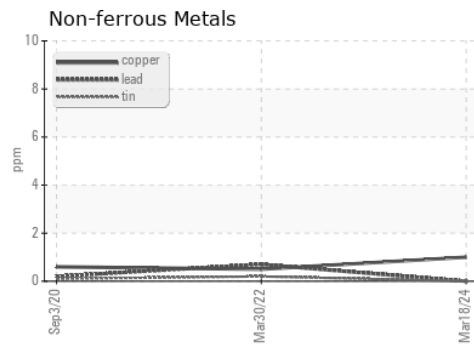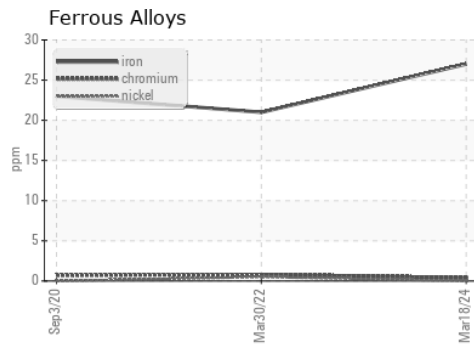

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0101219 **Received** : 24 Apr 2024
Lab Number : **06158818** **Tested** : 25 Apr 2024
Unique Number : 10994241 **Diagnosed** : 25 Apr 2024 - Sean Felton
Test Package : FLEET

McLane Company - High Plains - 600HP
 1717 East Loop 289
 LUBBOCK, TX
 US 79403
 Contact: RITA GARCIA
 rita.garcia@mcclaneco.com
 T: (806)766-2902
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)