




# OIL ANALYSIS REPORT

Sample Rating Trend

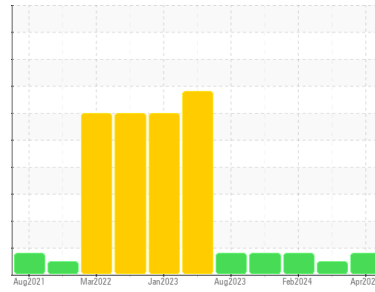

**WEAR**



Machine Id  
**420023-402284**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

The aluminum level is abnormal. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0118174</b>	GFL0109132	GFL0109227
Sample Date	Client Info		<b>08 Apr 2024</b>	13 Mar 2024	13 Feb 2024
Machine Age	hrs	Client Info	<b>25026</b>	24846	24686
Oil Age	hrs	Client Info	<b>300</b>	600	600
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Changed
Sample Status			<b>ABNORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>43</b>	8	66
Chromium	ppm	ASTM D5185m >4	<b>1</b>	0	3
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>▲ 56</b>	<1	<b>▲ 54</b>
Lead	ppm	ASTM D5185m >45	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >85	<b>2</b>	0	2
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	0	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>58</b>	61	53
Manganese	ppm	ASTM D5185m 0	<b>2</b>	0	1
Magnesium	ppm	ASTM D5185m 1010	<b>929</b>	1044	881
Calcium	ppm	ASTM D5185m 1070	<b>1052</b>	1157	960
Phosphorus	ppm	ASTM D5185m 1150	<b>1042</b>	1128	949
Zinc	ppm	ASTM D5185m 1270	<b>1218</b>	1385	1130
Sulfur	ppm	ASTM D5185m 2060	<b>3304</b>	3686	2729

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>10</b>	2	19
Sodium	ppm	ASTM D5185m	<b>1</b>	4	4
Potassium	ppm	ASTM D5185m >20	<b>0</b>	<1	0

## INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.9</b>	0.3	0.9
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.8</b>	9.1	7.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.6</b>	20.1	18.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.9</b>	16.9	13.7
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.6</b>	7.6	7.9







# OIL ANALYSIS REPORT

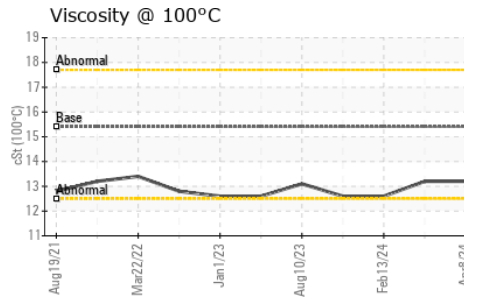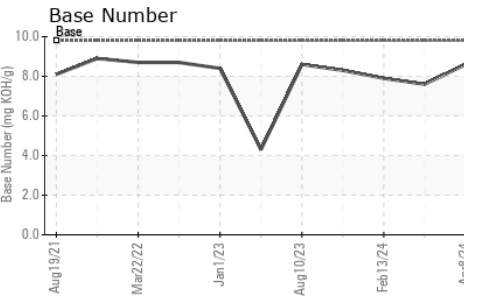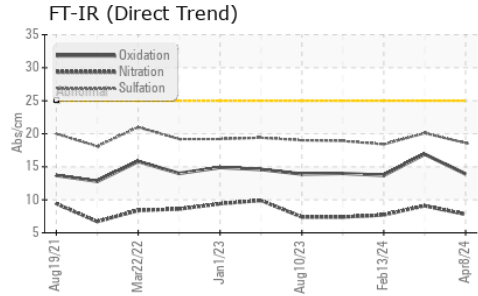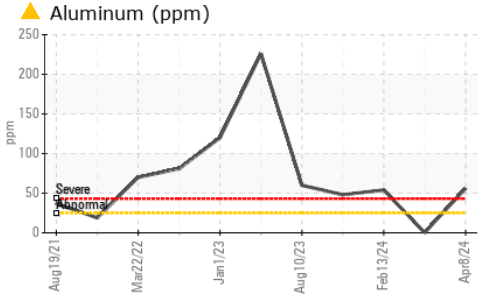

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.2</b>	13.2	12.6

## GRAPHS

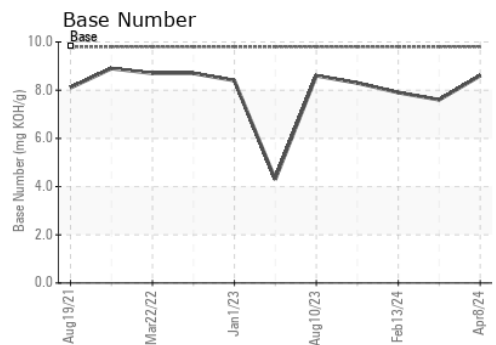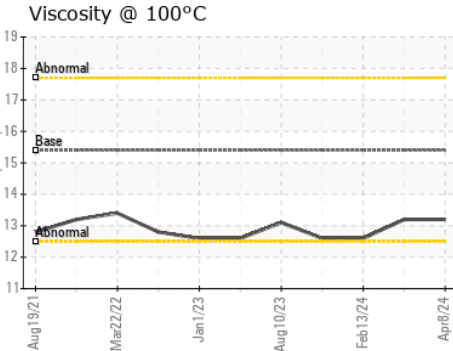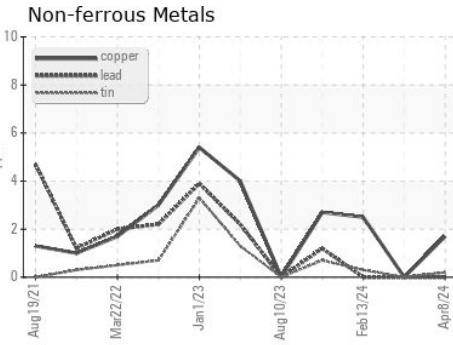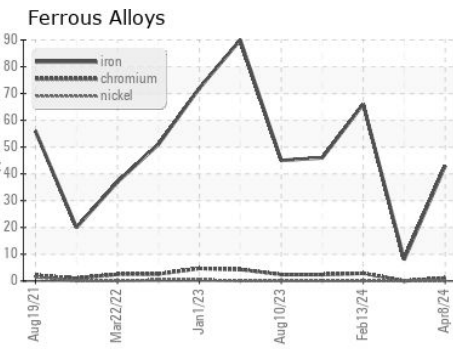

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0118174  
**Lab Number** : **06158912**  
**Unique Number** : 10994335  
**Test Package** : FLEET

**Received** : 24 Apr 2024  
**Tested** : 25 Apr 2024  
**Diagnosed** : 26 Apr 2024 - Jonathan Hester

**GFL Environmental - 822 - Springfield Hauling**  
 2120 West Bennett Street  
 Springfield, MO  
 US 65807

Contact: Dennis Moore  
 dennis.moore@gflenv.com  
 T: (417)403-3641

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: