



OIL ANALYSIS REPORT

Area
(YA144047) GFL035

Machine Id

3810


Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (38 QTS)

Sample Rating Trend

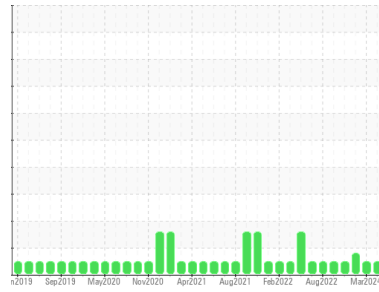

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0112906	GFL0112959	GFL0071579
Sample Date	Client Info		24 Apr 2024	04 Mar 2024	11 Jul 2023
Machine Age	hrs	Client Info	0	0	18225
Oil Age	hrs	Client Info	563	14817	600
Oil Changed	Client Info		N/A	N/A	Changed
Sample Status			NORMAL	NORMAL	ATTENTION

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >165	6	14	16
Chromium	ppm	ASTM D5185m >5	<1	<1	<1
Nickel	ppm	ASTM D5185m >4	0	0	0
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >20	1	<1	19
Lead	ppm	ASTM D5185m >150	0	<1	0
Copper	ppm	ASTM D5185m >90	1	1	<1
Tin	ppm	ASTM D5185m >5	0	0	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	2	<1	2
Barium	ppm	ASTM D5185m 0	0	0	<1
Molybdenum	ppm	ASTM D5185m 60	60	59	69
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	992	1078	1099
Calcium	ppm	ASTM D5185m 1070	1152	1200	1251
Phosphorus	ppm	ASTM D5185m 1150	1127	1176	1192
Zinc	ppm	ASTM D5185m 1270	1317	1350	1476
Sulfur	ppm	ASTM D5185m 2060	3644	3417	4015

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >35	4	4	4
Sodium	ppm	ASTM D5185m	<1	2	5
Potassium	ppm	ASTM D5185m >20	2	<1	30

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >7.5	0.4	0.7	0.5
Nitration	Abs/cm	*ASTM D7624 >20	5.6	7.3	9.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.3	19.5	20.1

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	13.4	14.8	16.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.9	8.2	8.4







OIL ANALYSIS REPORT

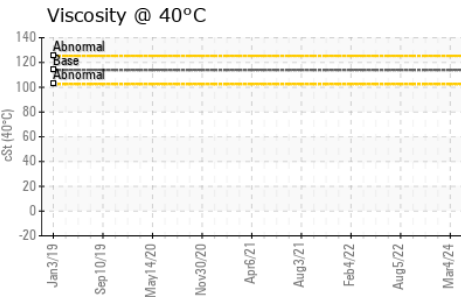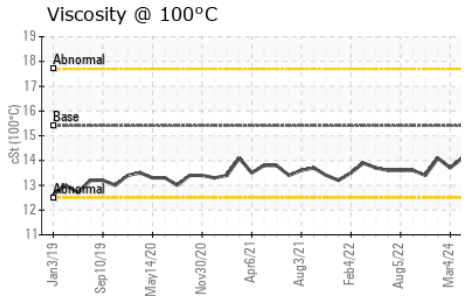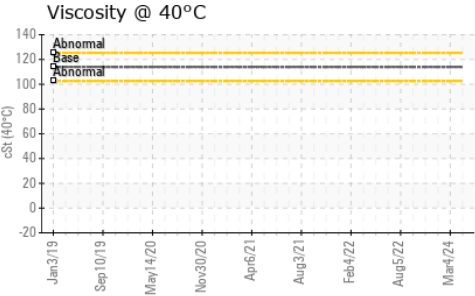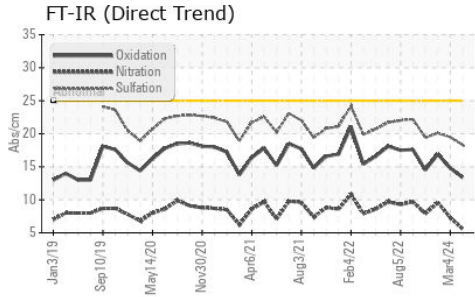

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	14.1	13.7	14.1

GRAPHS

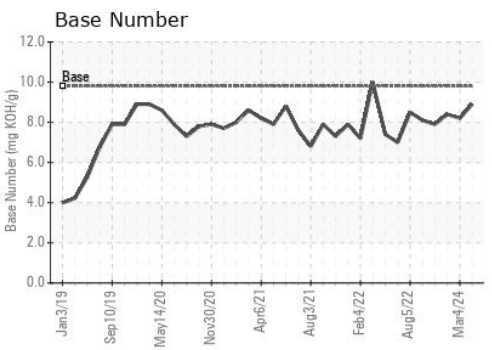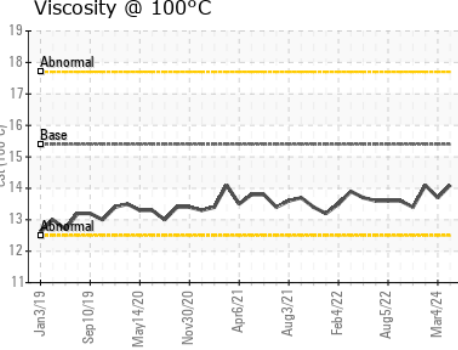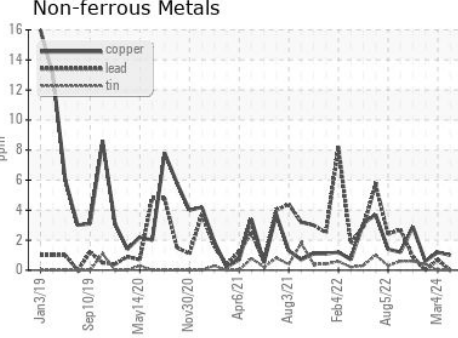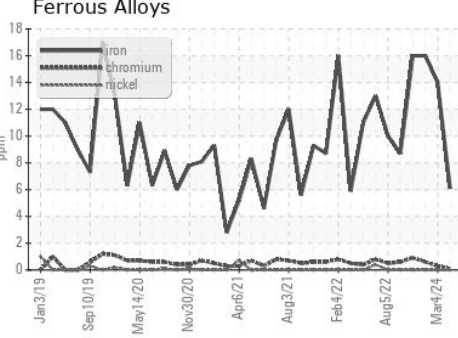

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0112906 **Received** : 24 Apr 2024
Lab Number : **06158916** **Tested** : 26 Apr 2024
Unique Number : 10994339 **Diagnosed** : 26 Apr 2024 - Sean Felton
Test Package : FLEET (Additional Tests: KV40)

GFL Environmental - 035 - Greensboro
 1236 Elon Place
 High Point, NC
 US 27263
 Contact: JORGE COSTA
 jorge.costa@gflenv.com
 T: (336)668-3712
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)