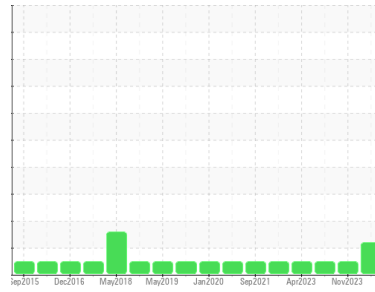


OIL ANALYSIS REPORT

Sample Rating Trend

VISUAL METAL

 Machine Id
MCI 329U

 Component
Diesel Engine

 Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)
DIAGNOSIS
Recommendation

Oil and filter change at the time of sampling has been noted. We advise that you inspect for the source(s) of metal. Resample at the next service interval to monitor.

Wear

Moderate concentration of visible metal present. All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0111559	PCA0102867	PCA0101059
Sample Date	Client Info		04 Apr 2024	27 Nov 2023	25 Aug 2023
Machine Age	mls	Client Info	328659	311076	297640
Oil Age	mls	Client Info	11363	13436	12028
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			ABNORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	14	14	19
Chromium	ppm	ASTM D5185m >20	1	<1	1
Nickel	ppm	ASTM D5185m >4	<1	0	0
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	4	2	5
Lead	ppm	ASTM D5185m >40	2	2	1
Copper	ppm	ASTM D5185m >330	1	1	1
Tin	ppm	ASTM D5185m >15	<1	0	<1
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	13	<1	0
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	74	64	66
Manganese	ppm	ASTM D5185m	<1	0	<1
Magnesium	ppm	ASTM D5185m	978	1059	1087
Calcium	ppm	ASTM D5185m	1177	1186	1193
Phosphorus	ppm	ASTM D5185m	1133	1056	1130
Zinc	ppm	ASTM D5185m	1297	1421	1393
Sulfur	ppm	ASTM D5185m	3451	3282	3840

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	8	5	7
Sodium	ppm	ASTM D5185m	4	2	2
Potassium	ppm	ASTM D5185m >20	1	0	0

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.3	0.4	0.4
Nitration	Abs/cm	*ASTM D7624 >20	9.3	10.1	9.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.2	20.9	20.5

FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.4	17.9	16.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.95	9.67	9.65

OIL ANALYSIS REPORT


FT-IR (Direct Trend)

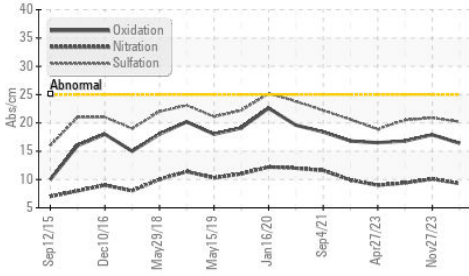

Base Number

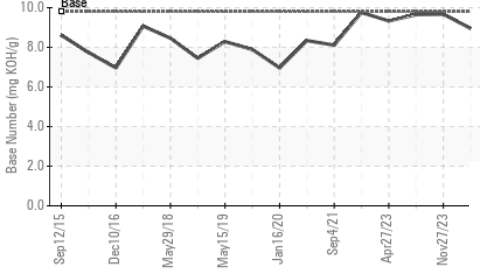

Viscosity @ 100°C

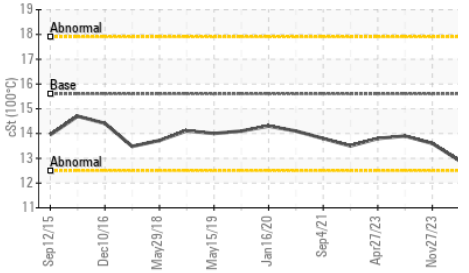


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	▲ MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.6	12.9	13.6

GRAPHS


Iron (ppm)

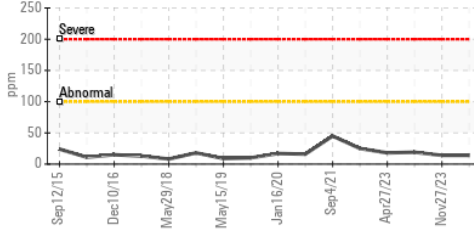


Lead (ppm)

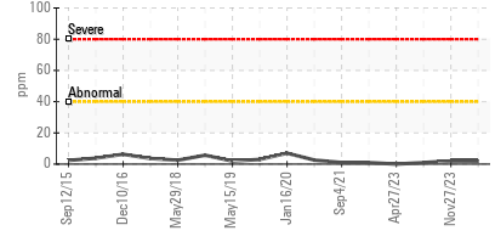


Aluminum (ppm)

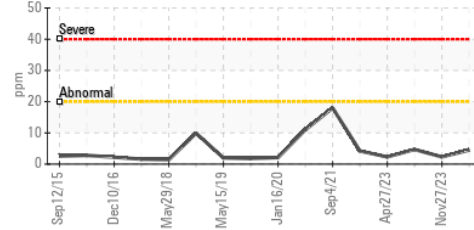


Chromium (ppm)

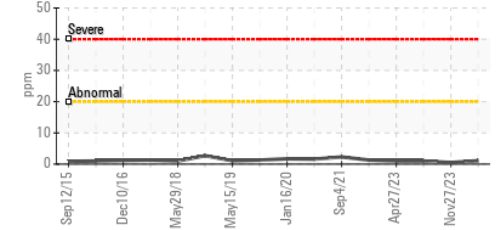


Copper (ppm)

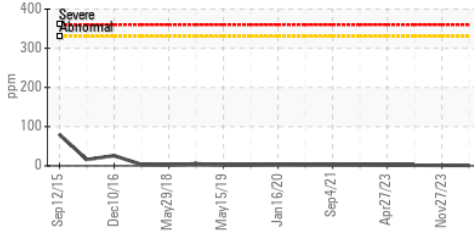


Silicon (ppm)

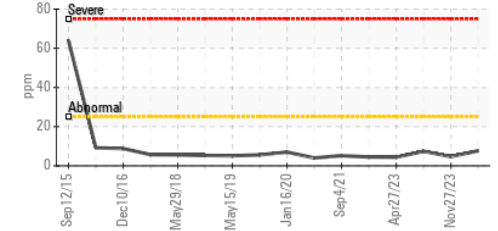

Viscosity @ 100°C

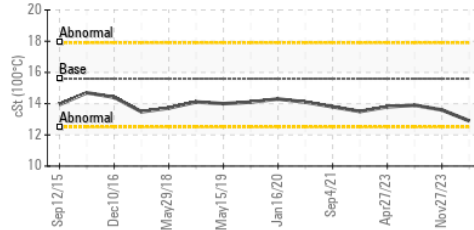

Base Number

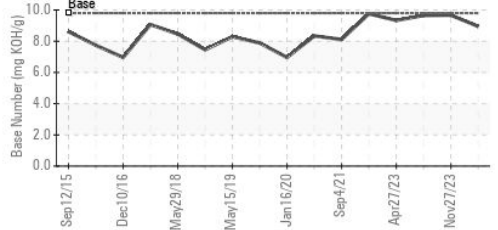

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0111559
Lab Number : 06159322
Unique Number : 10994745
Test Package : MOB 2

Received : 24 Apr 2024
Tested : 25 Apr 2024
Diagnosed : 26 Apr 2024 - Don Baldrige

BROWN BUS COMPANY - UPSTATE TRANSIT
 50 VENNERS ROAD
 AMSTERDAM, NY
 US 12010
 Contact: CONNIE WILBUR
 cwilbur@browncoach.com
 T: (518)843-4700
 F: (518)843-3600

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)