




# OIL ANALYSIS REPORT

## Sample Rating Trend

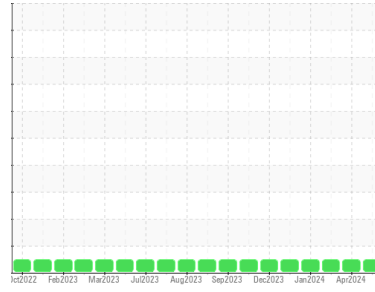

**NORMAL**



Machine Id  
**10623**

Component  
**Transmission (Auto)**

Fluid  
**PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0118067</b>  | GFL0115731  | GFL0112334  |
| Sample Date   | Client Info |             | <b>23 Apr 2024</b> | 01 Apr 2024 | 11 Mar 2024 |
| Machine Age   | hrs         | Client Info | <b>20088</b>       | 19941       | 19727       |
| Oil Age       | hrs         | Client Info | <b>287</b>         | 106         | 954         |
| Oil Changed   | Client Info |             | <b>Not Chngd</b>   | Not Chngd   | Not Chngd   |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|       | method    | limit/base | current    | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1       | <b>NEG</b> | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base  | current | history1     | history2 |    |
|----------|--------|-------------|---------|--------------|----------|----|
| Iron     | ppm    | ASTM D5185m | >160    | <b>33</b>    | 31       | 37 |
| Chromium | ppm    | ASTM D5185m | >5      | <b>0</b>     | 0        | 0  |
| Nickel   | ppm    | ASTM D5185m | >5      | <b>0</b>     | 0        | 0  |
| Titanium | ppm    | ASTM D5185m |         | <b>0</b>     | 0        | 0  |
| Silver   | ppm    | ASTM D5185m | >5      | <b>0</b>     | 0        | 0  |
| Aluminum | ppm    | ASTM D5185m | >50     | <b>2</b>     | 2        | 2  |
| Lead     | ppm    | ASTM D5185m | >50     | <b>0</b>     | 0        | 0  |
| Copper   | ppm    | ASTM D5185m | >225    | <b>0</b>     | 1        | 1  |
| Tin      | ppm    | ASTM D5185m | >10     | <b>&lt;1</b> | 0        | 0  |
| Vanadium | ppm    | ASTM D5185m |         | <b>0</b>     | 0        | 0  |
| Cadmium  | ppm    | ASTM D5185m |         | <b>0</b>     | 0        | 0  |

## ADDITIVES

|            | method | limit/base  | current | history1    | history2 |      |
|------------|--------|-------------|---------|-------------|----------|------|
| Boron      | ppm    | ASTM D5185m |         | <b>74</b>   | 75       | 71   |
| Barium     | ppm    | ASTM D5185m |         | <b>0</b>    | 0        | 0    |
| Molybdenum | ppm    | ASTM D5185m |         | <b>0</b>    | 0        | 0    |
| Manganese  | ppm    | ASTM D5185m |         | <b>0</b>    | <1       | 0    |
| Magnesium  | ppm    | ASTM D5185m |         | <b>3</b>    | 0        | <1   |
| Calcium    | ppm    | ASTM D5185m |         | <b>122</b>  | 120      | 120  |
| Phosphorus | ppm    | ASTM D5185m |         | <b>216</b>  | 211      | 203  |
| Zinc       | ppm    | ASTM D5185m |         | <b>2</b>    | 0        | 0    |
| Sulfur     | ppm    | ASTM D5185m |         | <b>1871</b> | 1940     | 2183 |

## CONTAMINANTS


|           | method | limit/base  | current | history1     | history2 |   |
|-----------|--------|-------------|---------|--------------|----------|---|
| Silicon   | ppm    | ASTM D5185m | >20     | <b>6</b>     | 6        | 7 |
| Sodium    | ppm    | ASTM D5185m |         | <b>2</b>     | 2        | 2 |
| Potassium | ppm    | ASTM D5185m | >20     | <b>&lt;1</b> | 0        | 0 |

## VISUAL

|                  | method | limit/base | current | history1     | history2 |       |
|------------------|--------|------------|---------|--------------|----------|-------|
| White Metal      | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Yellow Metal     | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Precipitate      | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Silt             | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Debris           | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Sand/Dirt        | scalar | *Visual    | NONE    | <b>NONE</b>  | NONE     | NONE  |
| Appearance       | scalar | *Visual    | NORML   | <b>NORML</b> | NORML    | NORML |
| Odor             | scalar | *Visual    | NORML   | <b>NORML</b> | NORML    | NORML |
| Emulsified Water | scalar | *Visual    | >0.1    | <b>NEG</b>   | NEG      | NEG   |
| Free Water       | scalar | *Visual    |         | <b>NEG</b>   | NEG      | NEG   |



# OIL ANALYSIS REPORT

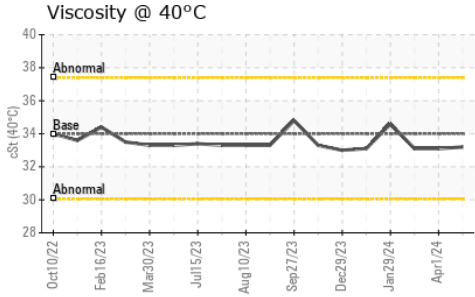




### FLUID PROPERTIES

| method      | limit/base    | current | history1    | history2 |      |
|-------------|---------------|---------|-------------|----------|------|
| Visc @ 40°C | cSt ASTM D445 | 34      | <b>33.2</b> | 33.1     | 33.1 |

### SAMPLE IMAGES

| method | limit/base | current | history1 | history2 |          |
|--------|------------|---------|----------|----------|----------|
| Color  |            |         | no image | no image | no image |
| Bottom |            |         | no image | no image | no image |

### GRAPHS

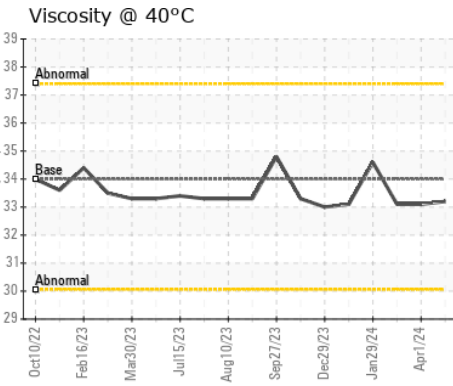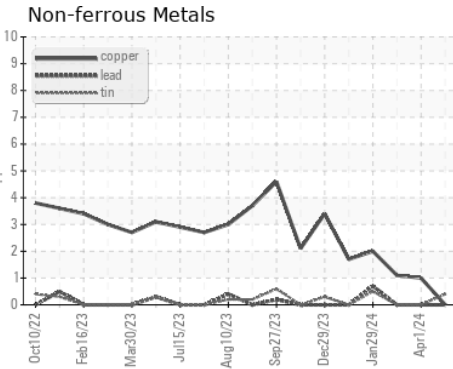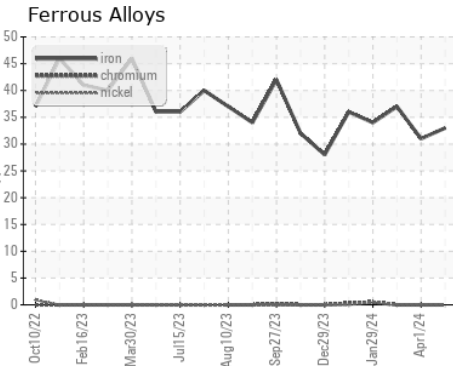

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0118067  
**Lab Number** : **06159523**  
**Unique Number** : 10994946  
**Test Package** : FLEET

**GFL Environmental - 010 - Stockbridge**  
 1280 Rum Creek Parkway  
 Stockbridge, GA  
 US 30281  
 Contact: JOSHUA TINKER  
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)