




# OIL ANALYSIS REPORT



Machine Id  
**426088-402413**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

Sample Rating Trend

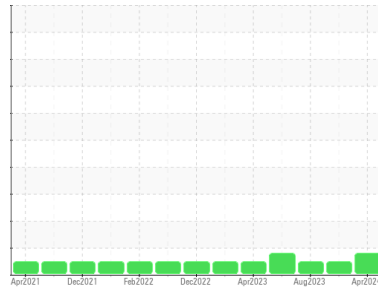

**WEAR**



## DIAGNOSIS

### ▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### ▲ Wear

Valve wear is indicated. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0114621</b>	GFL0092563	GFL0071933
Sample Date	Client Info		<b>24 Apr 2024</b>	06 Dec 2023	28 Aug 2023
Machine Age	hrs	Client Info	<b>19694</b>	19486	18982
Oil Age	hrs	Client Info	<b>600</b>	600	600
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>27</b>	23	10
Chromium	ppm	ASTM D5185m >20	<b>2</b>	2	0
Nickel	ppm	ASTM D5185m >5	<b>▲ 6</b>	4	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>5</b>	4	2
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	2
Copper	ppm	ASTM D5185m >330	<b>0</b>	2	0
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>6</b>	1	<1
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>59</b>	59	61
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m 1010	<b>820</b>	877	964
Calcium	ppm	ASTM D5185m 1070	<b>1231</b>	1125	1219
Phosphorus	ppm	ASTM D5185m 1150	<b>963</b>	950	1031
Zinc	ppm	ASTM D5185m 1270	<b>1229</b>	1221	1312
Sulfur	ppm	ASTM D5185m 2060	<b>3377</b>	2991	3775

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	5	4
Sodium	ppm	ASTM D5185m	<b>4</b>	5	4
Potassium	ppm	ASTM D5185m >20	<b>1</b>	0	7

## INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.9</b>	0.8	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.7</b>	10.2	8.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.0</b>	21.9	19.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.7</b>	17.6	15.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>4.5</b>	5.2	7.8







# OIL ANALYSIS REPORT

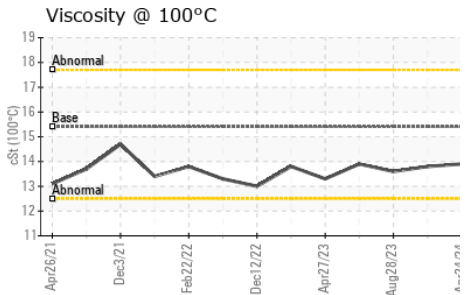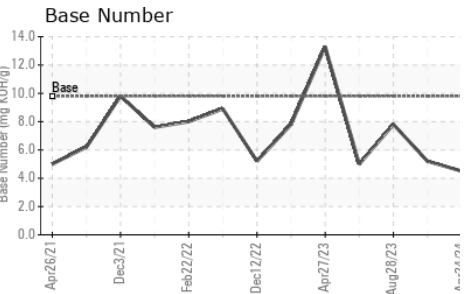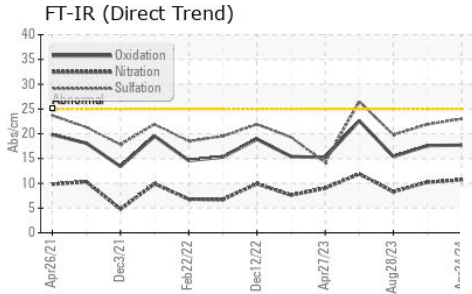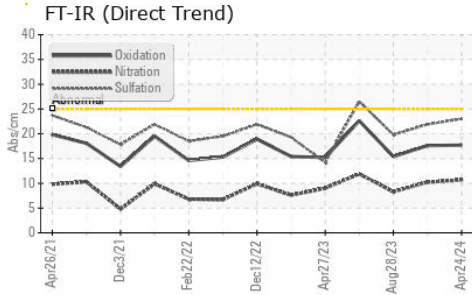

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.9</b>	13.8	13.6

## GRAPHS

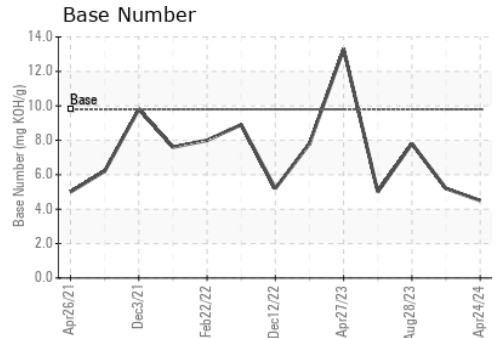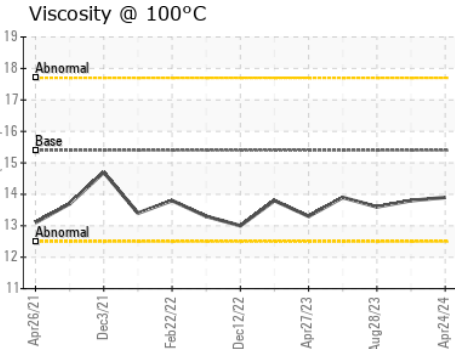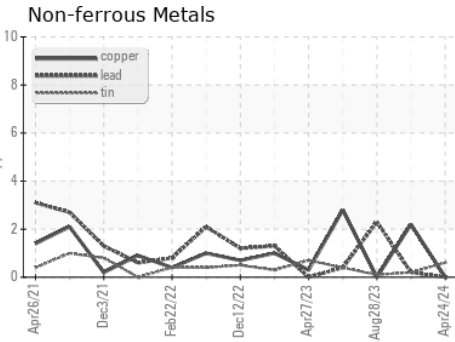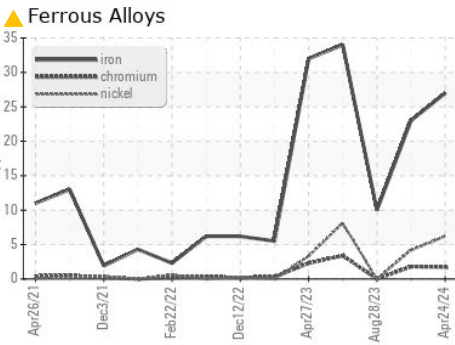

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0114621  
**Lab Number** : **06160166**  
**Unique Number** : 10995589  
**Test Package** : FLEET

**Received** : 25 Apr 2024  
**Tested** : 26 Apr 2024  
**Diagnosed** : 26 Apr 2024 - Don Baldrige

**GFL Environmental - 885 - Orlando**  
 1263 W Landstreet Rd  
 Orlando, FL  
 US 32824  
 Contact: DAWN WALLACE

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: