




OIL ANALYSIS REPORT

Sample Rating Trend

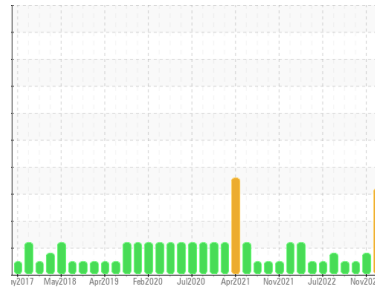

Machine Id
10678
 Component
Diesel Engine
 Fluid

PETRO CANADA DURON SHP 15W40 (9 GAL)

DIAGNOSIS

Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other component wear rates are normal.

Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0114530	GFL0092484	GFL0074612
Sample Date	Client Info	23 Apr 2024	03 Nov 2023	03 Aug 2023
Machine Age	hrs	38880	19058	18709
Oil Age	hrs	0	349	592
Oil Changed	Client Info	Changed	Not Changd	Changed
Sample Status		ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	45	36	46
Chromium	ppm ASTM D5185m >5	3	1	2
Nickel	ppm ASTM D5185m >4	2	<1	<1
Titanium	ppm ASTM D5185m >2	<1	<1	0
Silver	ppm ASTM D5185m >2	<1	0	<1
Aluminum	ppm ASTM D5185m >15	6	19	4
Lead	ppm ASTM D5185m >25	1	1	<1
Copper	ppm ASTM D5185m >100	233	1	0
Tin	ppm ASTM D5185m >4	1	2	<1
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	<1	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	29	4	4
Barium	ppm ASTM D5185m 0	<1	5	0
Molybdenum	ppm ASTM D5185m 60	60	62	71
Manganese	ppm ASTM D5185m 0	2	<1	<1
Magnesium	ppm ASTM D5185m 1010	514	849	1104
Calcium	ppm ASTM D5185m 1070	1574	1002	1226
Phosphorus	ppm ASTM D5185m 1150	671	971	1161
Zinc	ppm ASTM D5185m 1270	882	1140	1506
Sulfur	ppm ASTM D5185m 2060	2376	2765	3835

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	27	8	8
Sodium	ppm ASTM D5185m	46	3	14
Potassium	ppm ASTM D5185m >20	6	2	1
Glycol	% *ASTM D2982	NEG	NEG	NEG

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	1.2	0.5	0.7
Nitration	Abs/cm *ASTM D7624 >20	10.4	9.1	11.4
Sulfation	Abs/.1mm *ASTM D7415 >30	22.7	19.9	22.8


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	20.8	16.5	20.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.9	7.2	6.1




OIL ANALYSIS REPORT


▲ Silicon (ppm)

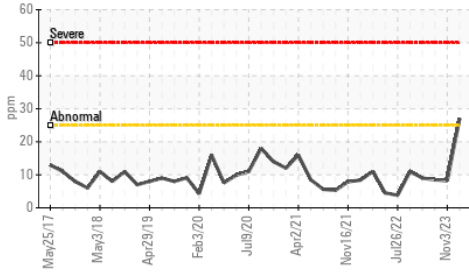


● Aluminum (ppm)

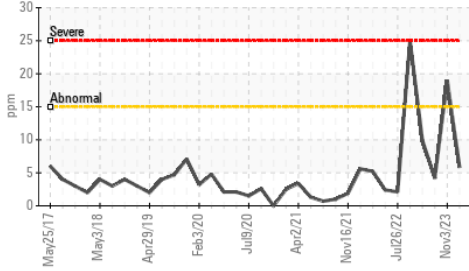


▲ FT-IR (Direct Trend)

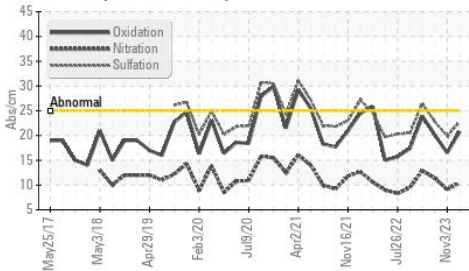

Additives

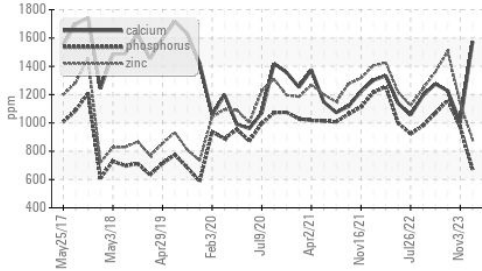

Glycol Contamination

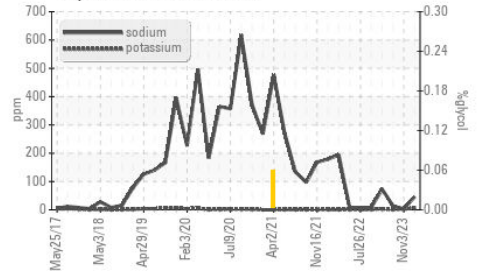


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	13.0

GRAPHS


Ferrous Alloys

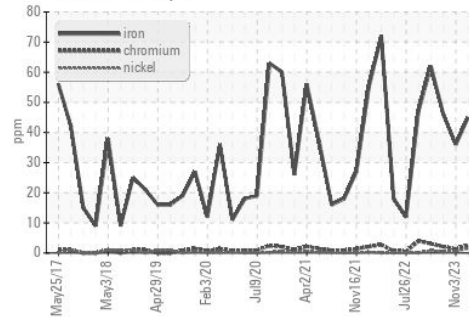


▲ Non-ferrous Metals

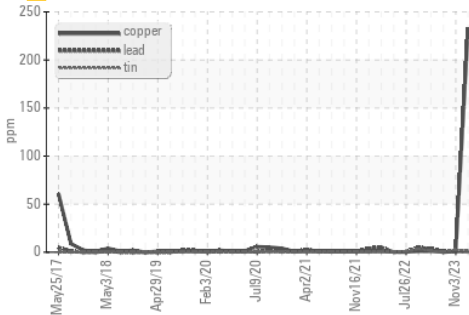

Viscosity @ 100°C

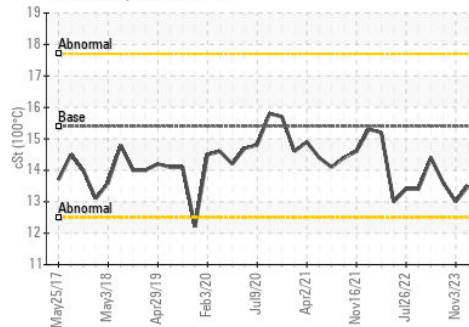

Base Number

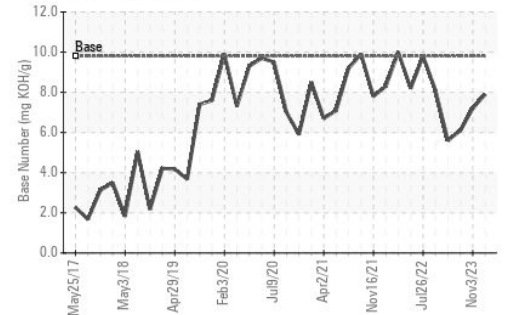

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0114530

Lab Number : 06160191

Unique Number : 10995614

Test Package : FLEET (Additional Tests: Glycol)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 25 Apr 2024

Tested : 26 Apr 2024

Diagnosed : 26 Apr 2024 - Don Baldrige

GFL Environmental - 095 - Atlanta West

2699 Cochran Industrial Blvd

Douglasville, GA

US 30127-1332

Contact: Darrell Welch

darrell.welch@gflenv.com

T: (800)207-6618

F: