




# OIL ANALYSIS REPORT

Sample Rating Trend

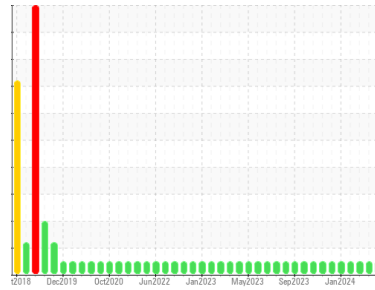

**NORMAL**



Machine Id

**2729**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0098890</b>	GFL0099023	GFL0098857
Sample Date	Client Info		<b>16 Apr 2024</b>	25 Mar 2024	28 Feb 2024
Machine Age	mls	Client Info	<b>326005</b>	319690	319690
Oil Age	mls	Client Info	<b>326005</b>	316767	316767
Oil Changed	Client Info		<b>N/A</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >165	<b>15</b>	29	9
Chromium	ppm	ASTM D5185m >5	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>1</b>	<1	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	3
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	3
Lead	ppm	ASTM D5185m >150	<b>2</b>	<1	4
Copper	ppm	ASTM D5185m >90	<b>5</b>	<1	<1
Tin	ppm	ASTM D5185m >5	<b>1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>6</b>	0	6
Barium	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>63</b>	63	58
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	0
Magnesium	ppm	ASTM D5185m 1010	<b>878</b>	1020	898
Calcium	ppm	ASTM D5185m 1070	<b>1227</b>	1257	1368
Phosphorus	ppm	ASTM D5185m 1150	<b>1000</b>	1113	1162
Zinc	ppm	ASTM D5185m 1270	<b>1233</b>	1380	1274
Sulfur	ppm	ASTM D5185m 2060	<b>3328</b>	3836	3508

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >35	<b>6</b>	6	6
Sodium	ppm	ASTM D5185m	<b>3</b>	42	2
Potassium	ppm	ASTM D5185m >20	<b>4</b>	36	3

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >7.5	<b>0.3</b>	0.6	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.8</b>	10.2	6.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.8</b>	22.0	18.3


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.4</b>	19.0	14.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.3</b>	7.5	8.1




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

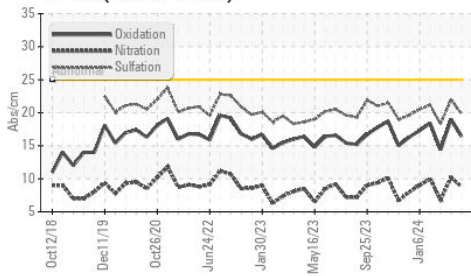

Base Number

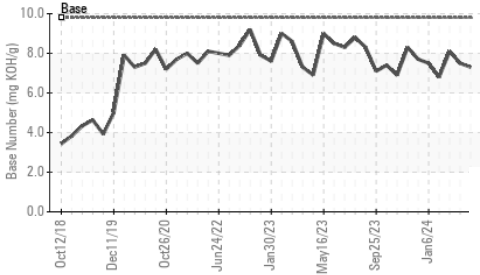

Viscosity @ 100°C

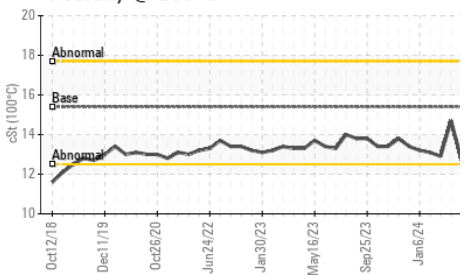


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.7	14.7

## GRAPHS


Ferrous Alloys

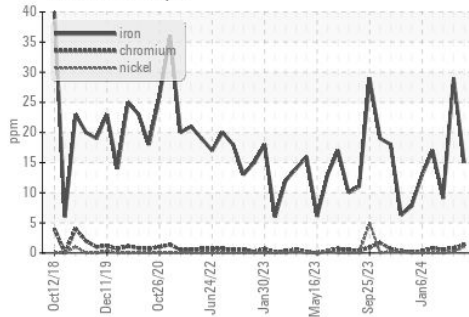


Non-ferrous Metals

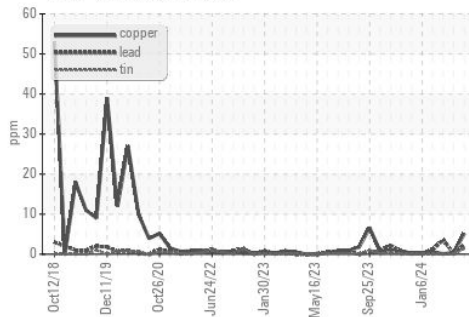

Viscosity @ 100°C

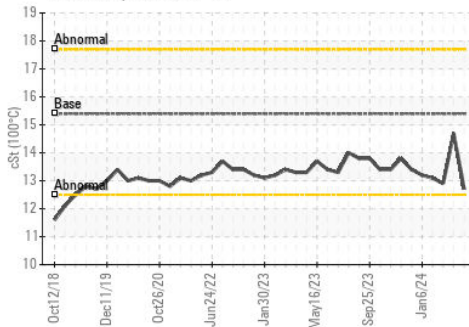

Base Number

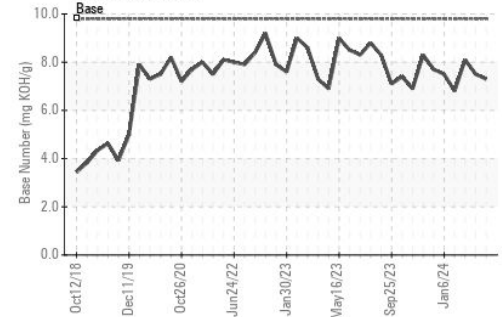

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0098890  
 Lab Number : 06160201  
 Unique Number : 10995624  
 Test Package : FLEET

Received : 25 Apr 2024  
 Tested : 26 Apr 2024  
 Diagnosed : 26 Apr 2024 - Wes Davis

GFL Environmental - 084 - Clarksville  
 699 Jack Miller Boulevard  
 Clarksville, TN  
 US 37042

Contact: ROBERT THIBAUT  
 robert.thibault@gflenv.com

T: (931)552-7276

F: (931)572-9674

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)