




# OIL ANALYSIS REPORT

Sample Rating Trend

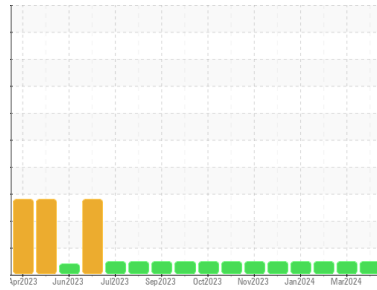

**NORMAL**



Machine Id  
**913181**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0098906</b>	GFL0098859	GFL0099025
Sample Date	Client Info		<b>17 Apr 2024</b>	08 Mar 2024	09 Feb 2024
Machine Age	hrs	Client Info	<b>2175</b>	2175	2014
Oil Age	hrs	Client Info	<b>2175</b>	1311	1311
Oil Changed	Client Info		<b>N/A</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>9</b>	26	15
Chromium	ppm	ASTM D5185m >20	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>2</b>	2	1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	1
Lead	ppm	ASTM D5185m >40	<b>1</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>2</b>	2	<1
Tin	ppm	ASTM D5185m >15	<b>1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Barium	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>57</b>	56	53
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>847</b>	937	797
Calcium	ppm	ASTM D5185m 1070	<b>1028</b>	1348	1123
Phosphorus	ppm	ASTM D5185m 1150	<b>860</b>	1055	988
Zinc	ppm	ASTM D5185m 1270	<b>1086</b>	1329	1149
Sulfur	ppm	ASTM D5185m 2060	<b>2954</b>	3776	2843

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	3	4
Sodium	ppm	ASTM D5185m	<b>0</b>	2	1
Potassium	ppm	ASTM D5185m >20	<b>2</b>	3	1

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.4</b>	0.9	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.1</b>	8.9	7.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.7</b>	19.3	18.6


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>12.8</b>	14.5	13.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.8</b>	7.5	8.0




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

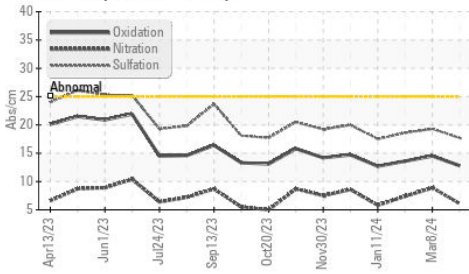

Base Number

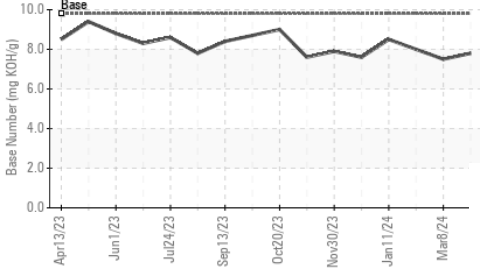

Viscosity @ 100°C

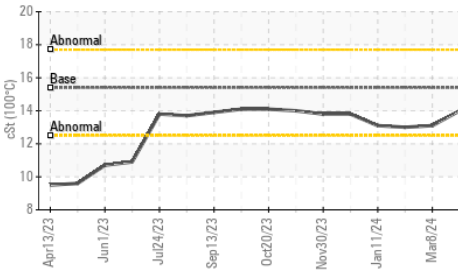


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.0	13.1

## GRAPHS


Ferrous Alloys

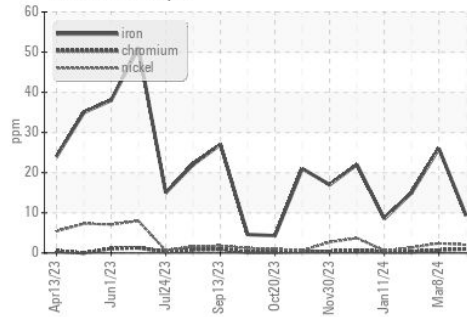


Non-ferrous Metals

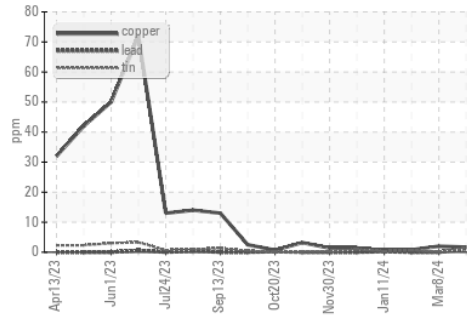

Viscosity @ 100°C

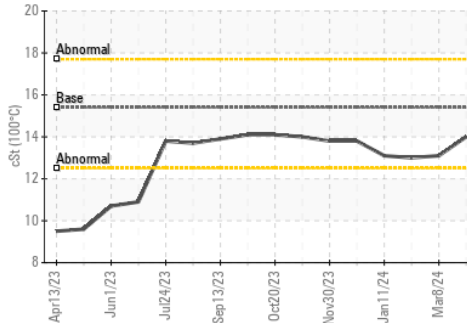

Base Number

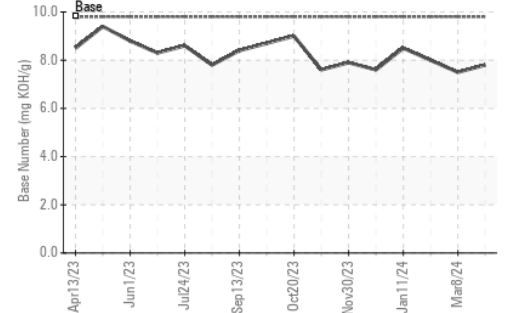

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0098906  
 Lab Number : 06160204  
 Unique Number : 10995627  
 Test Package : FLEET

Received : 25 Apr 2024  
 Tested : 26 Apr 2024  
 Diagnosed : 26 Apr 2024 - Wes Davis

GFL Environmental - 084 - Clarksville  
 699 Jack Miller Boulevard  
 Clarksville, TN  
 US 37042

Contact: ROBERT THIBAUT  
 robert.thibault@gflenv.com

T: (931)552-7276  
 F: (931)572-9674

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)