




# OIL ANALYSIS REPORT



Area  
**(TB7756)**  
 Machine Id  
**414086**  
 Component  
**1 Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 40 (40 QTS)**

### Sample Rating Trend

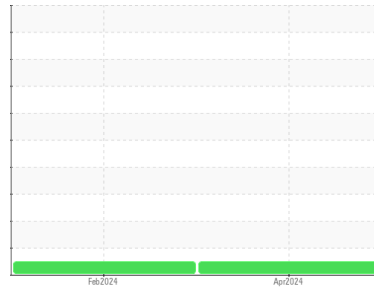

**NORMAL**



### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.

#### Wear

All component wear rates are normal.

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0112991</b>	GFL0108419	---
Sample Date	Client Info			<b>22 Apr 2024</b>	07 Feb 2024	---
Machine Age	hrs	Client Info		<b>1121</b>	550	---
Oil Age	hrs	Client Info		<b>1121</b>	550	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	0.6	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>120	<b>18</b>	45	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	2	---
Nickel	ppm	ASTM D5185m	>5	<b>3</b>	9	---
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	>2	<b>1</b>	1	---
Aluminum	ppm	ASTM D5185m	>20	<b>5</b>	10	---
Lead	ppm	ASTM D5185m	>40	<b>1</b>	<1	---
Copper	ppm	ASTM D5185m	>330	<b>85</b>	119	---
Tin	ppm	ASTM D5185m	>15	<b>2</b>	3	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>9</b>	240	---
Barium	ppm	ASTM D5185m	10	<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m	100	<b>67</b>	126	---
Manganese	ppm	ASTM D5185m		<b>2</b>	4	---
Magnesium	ppm	ASTM D5185m	450	<b>940</b>	769	---
Calcium	ppm	ASTM D5185m	3000	<b>1107</b>	1478	---
Phosphorus	ppm	ASTM D5185m	1150	<b>975</b>	778	---
Zinc	ppm	ASTM D5185m	1350	<b>1212</b>	966	---
Sulfur	ppm	ASTM D5185m	4250	<b>3027</b>	2440	---




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>11</b>	73	---
Sodium	ppm	ASTM D5185m	>216	<b>2</b>	0	---
Potassium	ppm	ASTM D5185m	>20	<b>12</b>	28	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>4	<b>0.3</b>	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.3</b>	9.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.0</b>	23.9	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.0</b>	21.5	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.0</b>	7.5	---







# OIL ANALYSIS REPORT

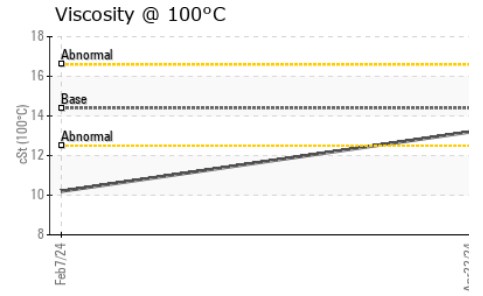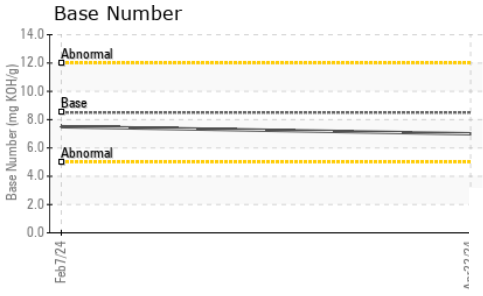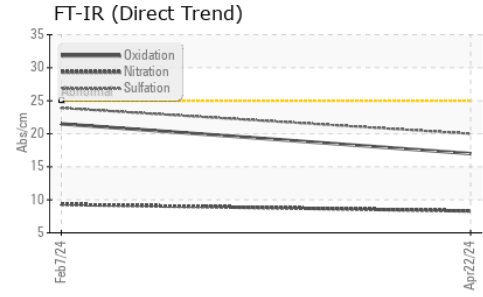

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.2	10.2

### GRAPHS

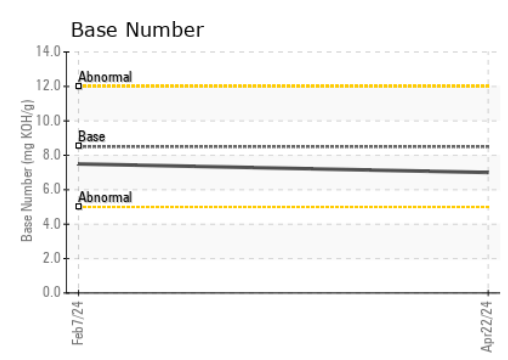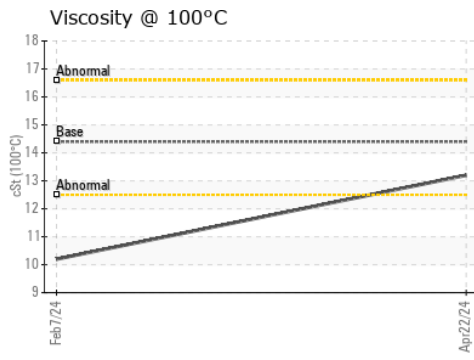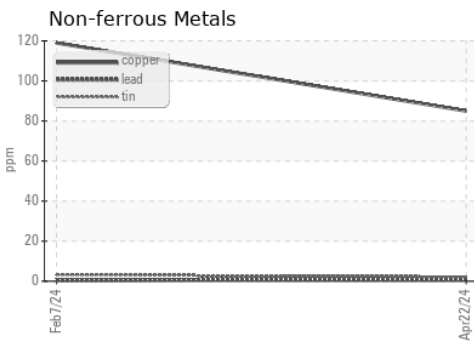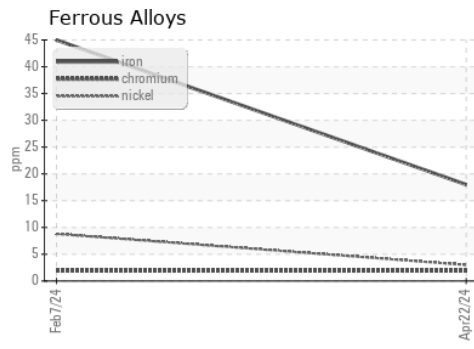

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0112991      **Received** : 25 Apr 2024  
**Lab Number** : 06160208      **Tested** : 26 Apr 2024  
**Unique Number** : 10995631      **Diagnosed** : 26 Apr 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 918 - Hartland WI**  
 630 E Industrial Drive  
 Hartland, WI  
 US 53029  
 Contact: David McCall  
 david.mccall@gflenv.com  
 T: (262)369-3069  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)