




# PROBLEM SUMMARY

Area  
**(DJT517)**  
 Machine Id  
**10523**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**



Sample Rating Trend

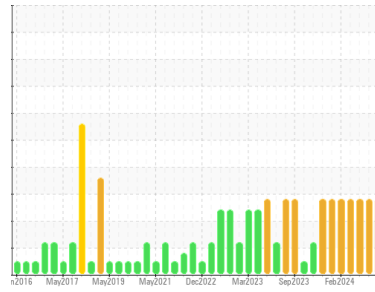

FUEL



## COMPONENT CONDITION SUMMARY

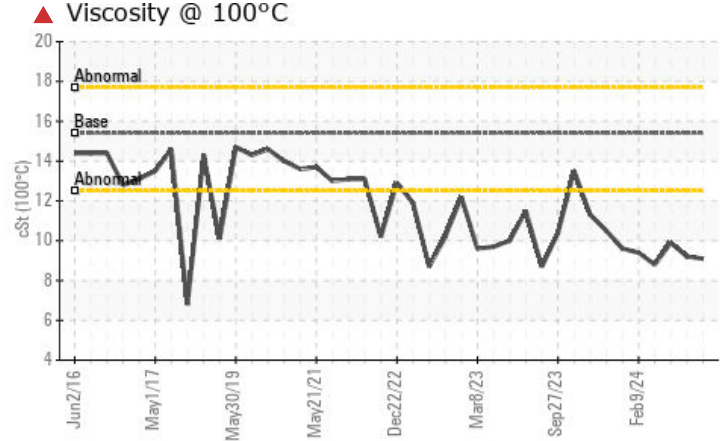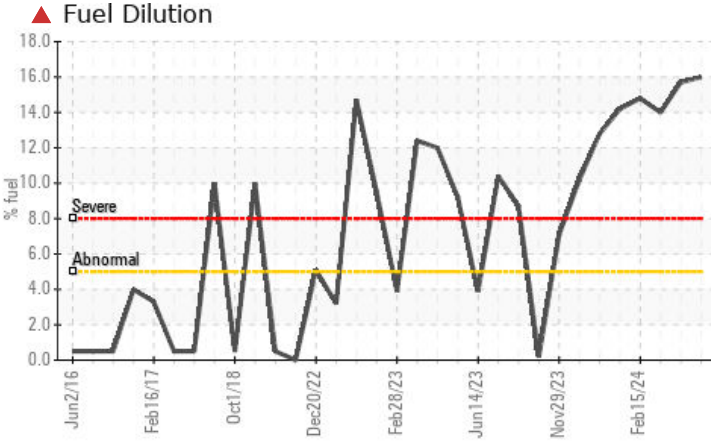

## RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>SEVERE</b>	SEVERE	SEVERE
Fuel	%	ASTM D3524	>5	<b>▲ 16.0</b>	▲ 15.7	▲ 14.0
Visc @ 100°C	cSt	ASTM D445	15.4	<b>▲ 9.1</b>	▲ 9.2	▲ 9.9

Customer Id: GFL010  
 Sample No.: GFL0118078  
 Lab Number: 06161113  
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Wes Davis +1 905-569-8600 x223  
[wesd@wearcheck.ca](mailto:wesd@wearcheck.ca)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

## HISTORICAL DIAGNOSIS

### FUEL



#### 23 Apr 2024 Diag: Angela Borella

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)



### FUEL



#### 05 Apr 2024 Diag: Wes Davis

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)



### FUEL



#### 15 Feb 2024 Diag: Wes Davis

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.


[view report](#)





# OIL ANALYSIS REPORT

Sample Rating Trend

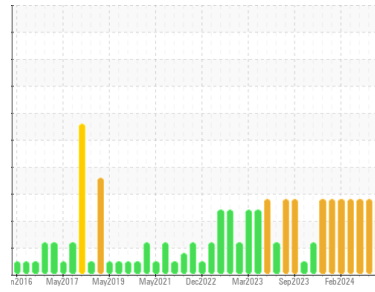

FUEL



Area  
(DJT517)

Machine Id  
**10523**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### ▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0118078</b>	GFL0118064	GFL0115723
Sample Date	Client Info		<b>24 Apr 2024</b>	23 Apr 2024	05 Apr 2024
Machine Age	hrs	Client Info	<b>24423</b>	24423	24301
Oil Age	hrs	Client Info	<b>426</b>	426	304
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status			<b>SEVERE</b>	SEVERE	SEVERE

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>18</b>	16	15
Chromium	ppm	ASTM D5185m >20	<b>2</b>	0	2
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	0	3
Lead	ppm	ASTM D5185m >40	<b>1</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>2</b>	0	2
Tin	ppm	ASTM D5185m >15	<b>1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>6</b>	3	8
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>50</b>	53	56
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>706</b>	741	741
Calcium	ppm	ASTM D5185m 1070	<b>873</b>	949	905
Phosphorus	ppm	ASTM D5185m 1150	<b>894</b>	865	818
Zinc	ppm	ASTM D5185m 1270	<b>973</b>	1038	1012
Sulfur	ppm	ASTM D5185m 2060	<b>2796</b>	2811	2437

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>8</b>	6	8
Sodium	ppm	ASTM D5185m	<b>5</b>	3	4
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	2
Fuel	%	ASTM D3524 >5	<b>▲ 16.0</b>	▲ 15.7	▲ 14.0

## INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	0.6	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.3</b>	10.4	9.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.6</b>	19.8	18.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.8</b>	17.1	16.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>5.4</b>	5.7	6.3







# OIL ANALYSIS REPORT

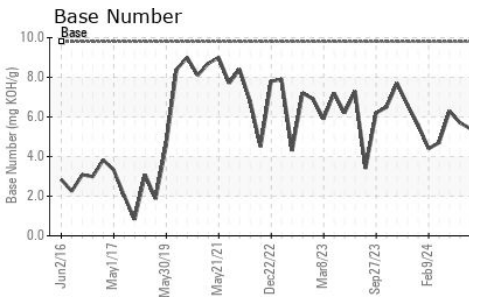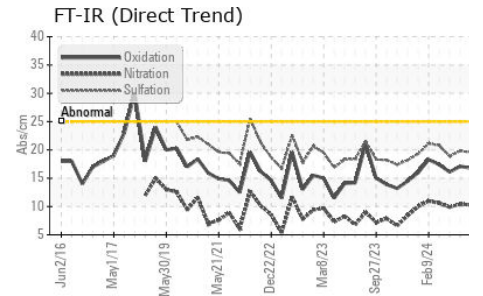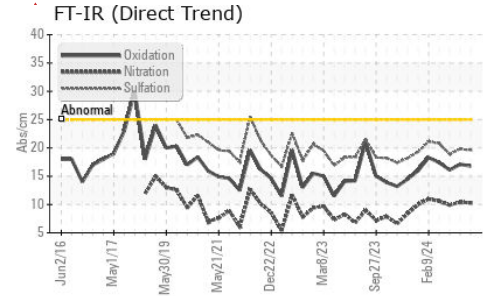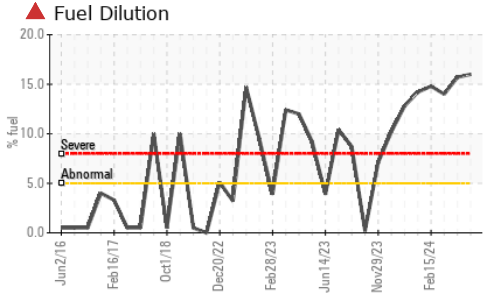

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 9.1	▲ 9.2

## GRAPHS

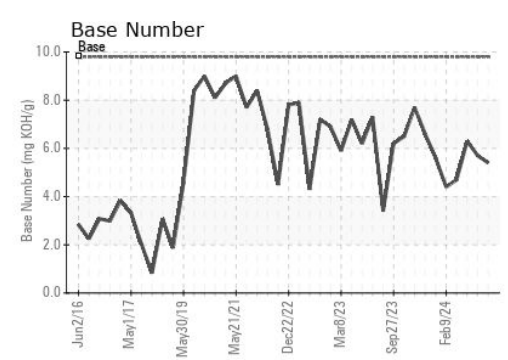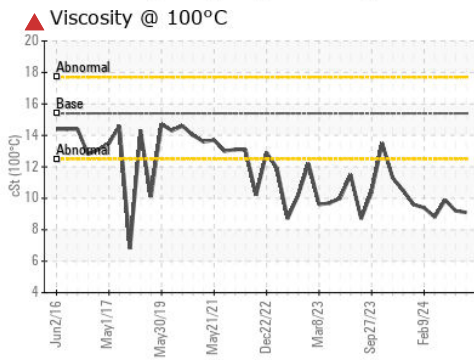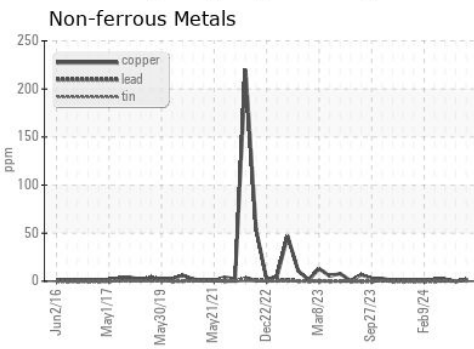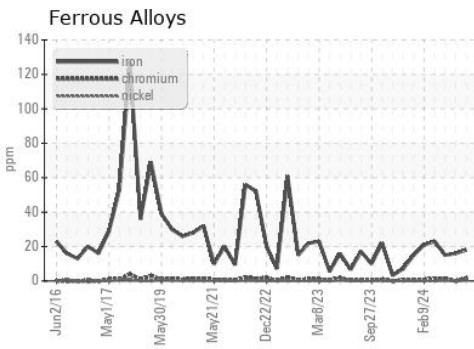

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0118078  
**Lab Number** : 06161113  
**Unique Number** : 10996536  
**Test Package** : FLEET ( Additional Tests: PercentFuel )  
**Received** : 25 Apr 2024  
**Tested** : 29 Apr 2024  
**Diagnosed** : 29 Apr 2024 - Wes Davis

**GFL Environmental - 010 - Stockbridge**  
 1280 Rum Creek Parkway  
 Stockbridge, GA  
 US 30281  
 Contact: JOSHUA TINKER  
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)