




# OIL ANALYSIS REPORT

Sample Rating Trend

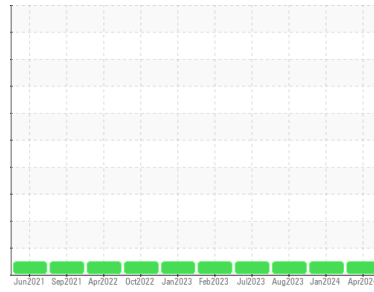

**NORMAL**



Area  
**(P8618D) {UNASSIGNED}**

Machine Id  
**910087**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0106206</b>	GFL0078644	GFL0082070
Sample Date	Client Info			<b>15 Apr 2024</b>	20 Jan 2024	15 Aug 2023
Machine Age	hrs	Client Info		<b>17486</b>	16914	7942
Oil Age	hrs	Client Info		<b>600</b>	600	600
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	<b>22</b>	26	8
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	2	1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>8</b>	10	2
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>2</b>	3	12
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>63</b>	62	61
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>998</b>	1011	945
Calcium	ppm	ASTM D5185m	1070	<b>1138</b>	1113	1084
Phosphorus	ppm	ASTM D5185m	1150	<b>1085</b>	1047	989
Zinc	ppm	ASTM D5185m	1270	<b>1317</b>	1307	1202
Sulfur	ppm	ASTM D5185m	2060	<b>3747</b>	3234	3603




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>3</b>	4	2
Sodium	ppm	ASTM D5185m		<b>4</b>	3	3
Potassium	ppm	ASTM D5185m	>20	<b>14</b>	21	4

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>6	<b>1.6</b>	1.7	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.3</b>	9.1	6.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.0</b>	21.2	18.3

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.1</b>	14.8	13.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.2</b>	8.8	9.0







# OIL ANALYSIS REPORT

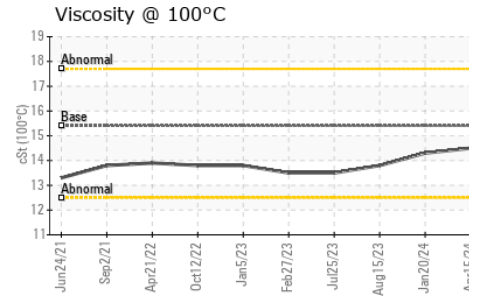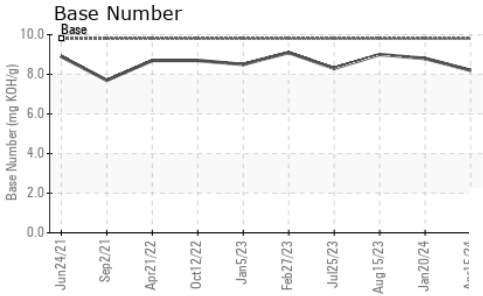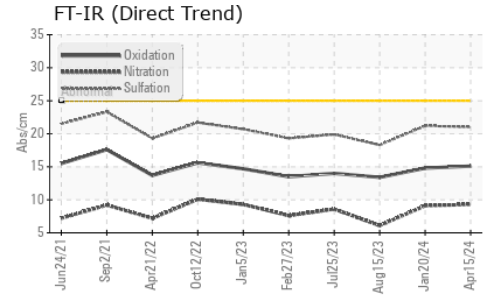

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.5	14.3

## GRAPHS

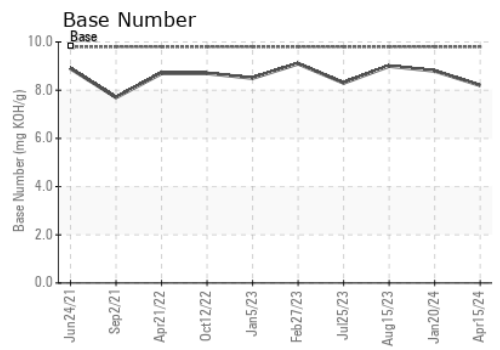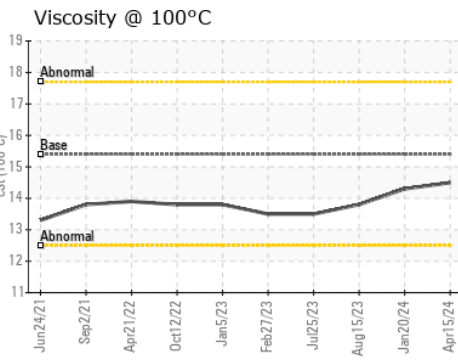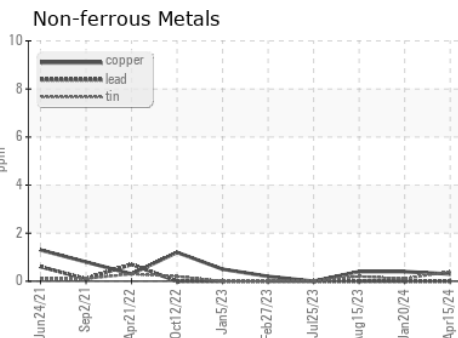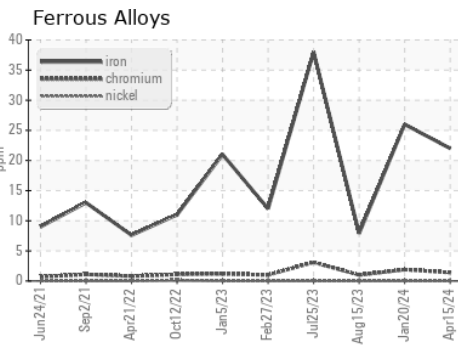

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0106206      **Received** : 26 Apr 2024  
**Lab Number** : 06161194      **Tested** : 26 Apr 2024  
**Unique Number** : 10996617      **Diagnosed** : 26 Apr 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 152 - Jacksonville**  
 7580 PHILIPS HWY  
 Jacksonville, FL  
 US 32256  
 Contact: Chris Smith  
 chris.smith@gflenv.com  
 T: (904)252-0013  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)