


OIL ANALYSIS REPORT

Sample Rating Trend



DEGRADATION

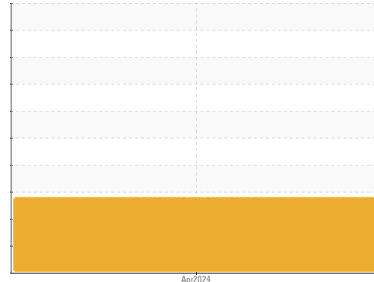

Machine Id
637910
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

DIAGNOSIS

Recommendation

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

Cylinder, crank, or cam shaft wear is indicated.

Contamination

There is an abnormal amount of solids and carbon present in the oil. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components.

Fluid Condition

The BN level is low.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0101990	---	---
Sample Date	Client Info	05 Apr 2024	---	---
Machine Age	mls Client Info	87181	---	---
Oil Age	mls Client Info	0	---	---
Oil Changed	Client Info	Changed	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	---	---
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >100	▲ 222	---	---
Chromium ppm	ASTM D5185m >20	13	---	---
Nickel ppm	ASTM D5185m >4	3	---	---
Titanium ppm	ASTM D5185m	<1	---	---
Silver ppm	ASTM D5185m >3	<1	---	---
Aluminum ppm	ASTM D5185m >20	130	---	---
Lead ppm	ASTM D5185m >40	<1	---	---
Copper ppm	ASTM D5185m >330	264	---	---
Tin ppm	ASTM D5185m >15	9	---	---
Vanadium ppm	ASTM D5185m	<1	---	---
Cadmium ppm	ASTM D5185m	<1	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m 2	13	---	---
Barium ppm	ASTM D5185m 0	2	---	---
Molybdenum ppm	ASTM D5185m 50	54	---	---
Manganese ppm	ASTM D5185m 0	8	---	---
Magnesium ppm	ASTM D5185m 950	657	---	---
Calcium ppm	ASTM D5185m 1050	1743	---	---
Phosphorus ppm	ASTM D5185m 995	793	---	---
Zinc ppm	ASTM D5185m 1180	988	---	---
Sulfur ppm	ASTM D5185m 2600	1952	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >25	14	---	---
Sodium ppm	ASTM D5185m	10	---	---
Potassium ppm	ASTM D5185m >20	339	---	---
Fuel %	ASTM D3524 >5	<1.0	---	---






INFRA-RED

method	limit/base	current	history1	history2
Soot %	*ASTM D7844 >3	▲ 3.5	---	---
Nitration Abs/cm	*ASTM D7624 >20	23.4	---	---
Sulfation Abs/.1mm	*ASTM D7415 >30	35.1	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation Abs/.1mm	*ASTM D7414 >25	45.8	---	---
Base Number (BN) mg KOH/g	ASTM D2896	▲ 1.1	---	---









OIL ANALYSIS REPORT

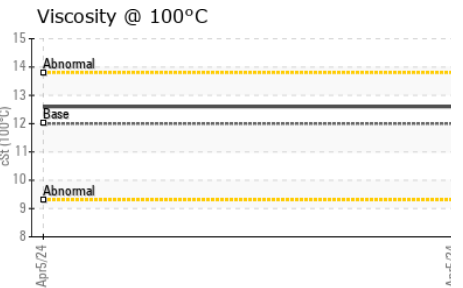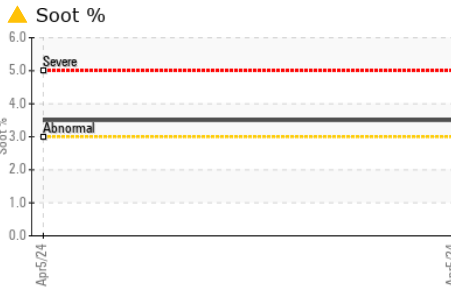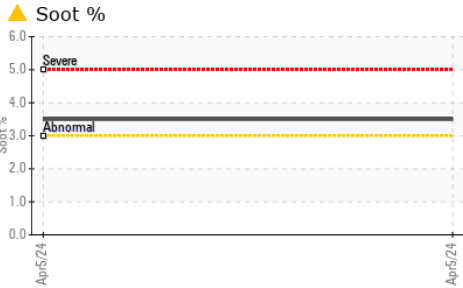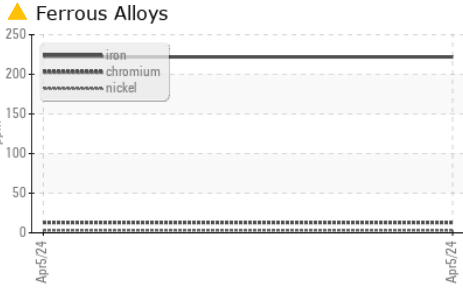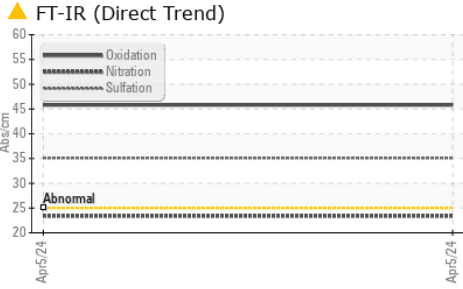

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	12.6	---

GRAPHS

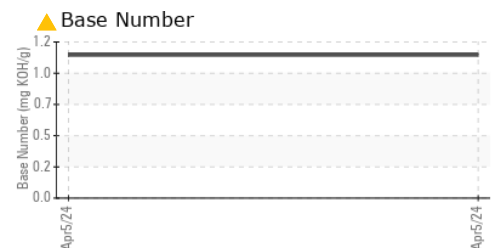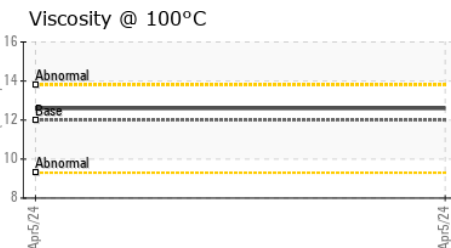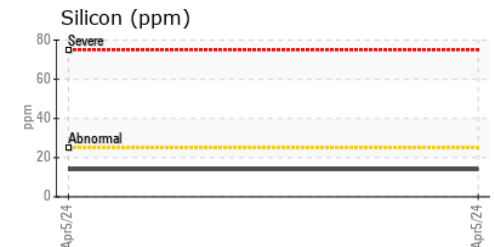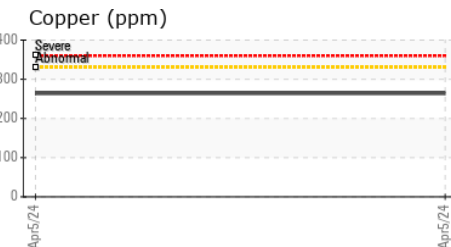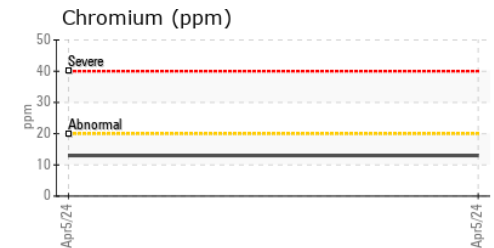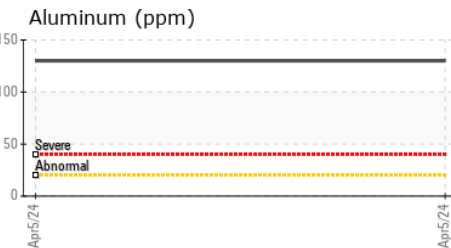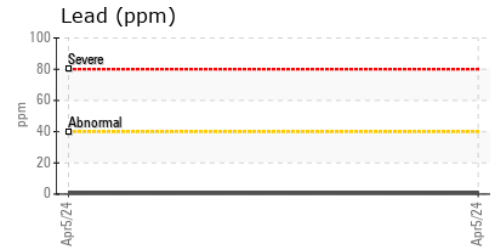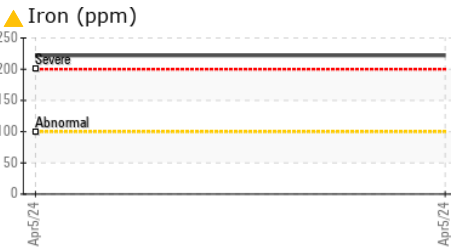

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0101990 **Received** : 26 Apr 2024
Lab Number : 06161240 **Tested** : 29 Apr 2024
Unique Number : 10996663 **Diagnosed** : 29 Apr 2024 - Sean Felton
Test Package : MOB 1 (Additional Tests: FuelDilution, TBN)

MILLER TRUCK LEASING #112
 1504 MAINLINE DR
 CINNAMINSON, NJ
 US 08077
 Contact: MIKE BOYER
 mboyer@millertransgroup.com
 T: (856)662-4264
 F: (856)663-4898

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)