


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

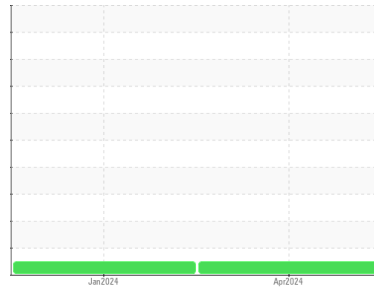

Machine Id  
**2227086**  
 Component  
**Rear Differential**  
 Fluid  
**GEAR OIL SAE 75W90 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0124567</b>	PCA0116198	---
Sample Date	Client Info			<b>15 Apr 2024</b>	15 Jan 2024	---
Machine Age	mls Client Info			<b>40994</b>	21912	---
Oil Age	mls Client Info			<b>40994</b>	21912	---
Oil Changed	Client Info			<b>Not Chngd</b>	Not Chngd	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	<b>NEG</b>	NEG	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	<b>186</b>	144	---
Chromium	ppm	ASTM D5185m	>10	<b>3</b>	2	---
Nickel	ppm	ASTM D5185m	>10	<b>5</b>	3	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	1	---
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>100	<b>1</b>	<1	---
Tin	ppm	ASTM D5185m	>10	<b>1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	<b>215</b>	160	---
Barium	ppm	ASTM D5185m	200	<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m	12	<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>11</b>	9	---
Magnesium	ppm	ASTM D5185m	12	<b>1</b>	0	---
Calcium	ppm	ASTM D5185m	150	<b>18</b>	5	---
Phosphorus	ppm	ASTM D5185m	1650	<b>1219</b>	1087	---
Zinc	ppm	ASTM D5185m	125	<b>16</b>	0	---
Sulfur	ppm	ASTM D5185m	22500	<b>29641</b>	27964	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	<b>63</b>	58	---
Sodium	ppm	ASTM D5185m		<b>4</b>	4	---
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	2	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual		<b>NEG</b>	NEG	---

# OIL ANALYSIS REPORT

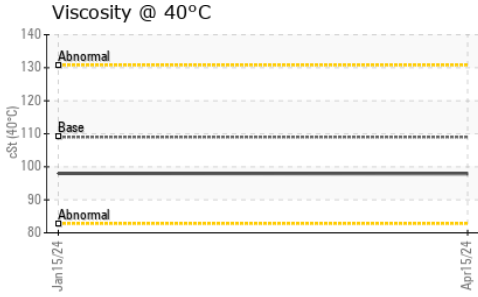




FLUID PROPERTIES	method	limit/base	current	history1	history2
------------------	--------	------------	---------	----------	----------

Visc @ 40°C	cSt	ASTM D445	109	<b>97.9</b>	98.0	---
-------------	-----	-----------	-----	-------------	------	-----

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS
--------

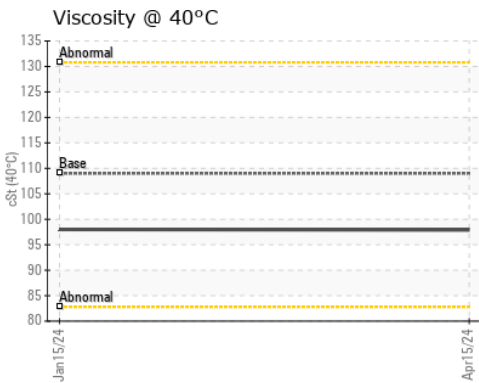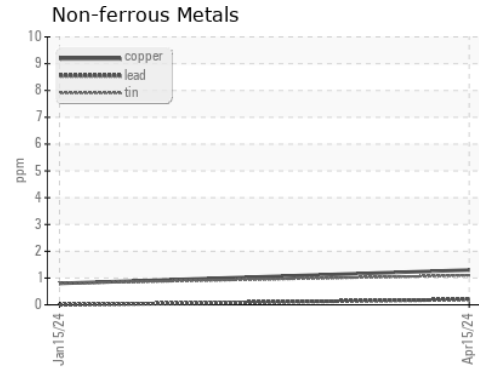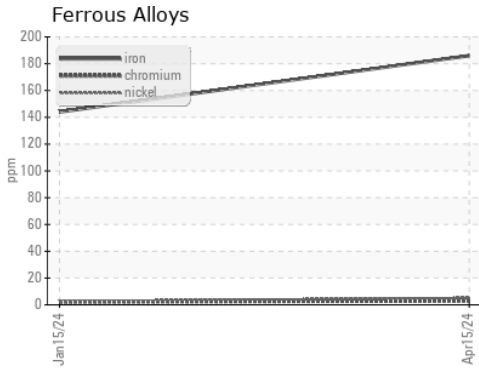

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0124567  
**Lab Number** : 06174474  
**Unique Number** : 11020527  
**Test Package** : FLEET

**PERDUE FARMS - GEORGETOWN**  
 20621 SAVANAH RD  
 GEORGETOWN, DE  
 US 19947  
 Contact: ROBERT LOCKWOOD  
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: