

# OIL ANALYSIS REPORT

**Sample Rating Trend**

**NORMAL**


Machine Id  
**26567**  
 Component  
**Front Differential**  
 Fluid  
**GEAR OIL SAE 75W90 (--- QTS)**

**DIAGNOSIS**
**Recommendation**

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 75W90. Please confirm. Please specify the component make and model with your next sample.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0116023</b>	---	---
Sample Date	Client Info			<b>07 Mar 2024</b>	---	---
Machine Age	mls	Client Info		<b>0</b>	---	---
Oil Age	mls	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>Not Chngd</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	<b>NEG</b>	---	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	<b>261</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>5</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>25	<b>11</b>	---	---
Copper	ppm	ASTM D5185m	>100	<b>92</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>8</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	<b>262</b>	---	---
Barium	ppm	ASTM D5185m	200	<b>3</b>	---	---
Molybdenum	ppm	ASTM D5185m	12	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>13</b>	---	---
Magnesium	ppm	ASTM D5185m	12	<b>1</b>	---	---
Calcium	ppm	ASTM D5185m	150	<b>17</b>	---	---
Phosphorus	ppm	ASTM D5185m	1650	<b>1508</b>	---	---
Zinc	ppm	ASTM D5185m	125	<b>24</b>	---	---
Sulfur	ppm	ASTM D5185m	22500	<b>26527</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	<b>35</b>	---	---
Sodium	ppm	ASTM D5185m		<b>12</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---

# OIL ANALYSIS REPORT



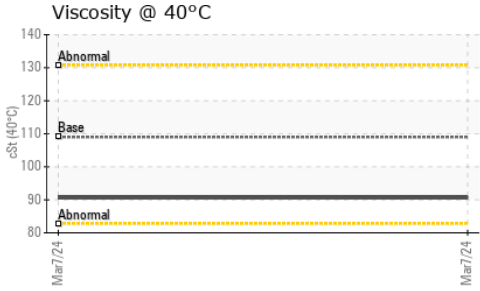


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 109	<b>90.6</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color	no image	no image	no image
Bottom	no image	no image	no image

## GRAPHS

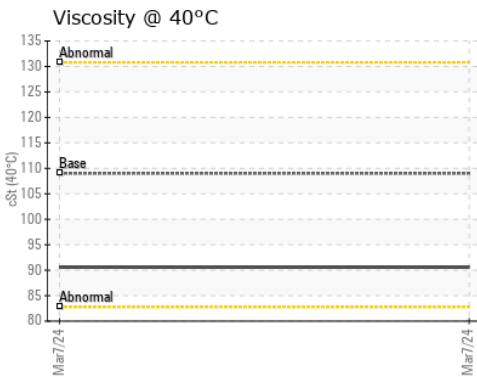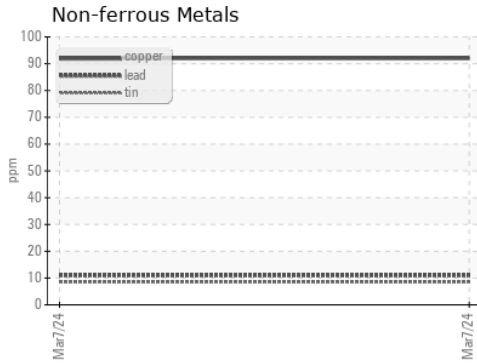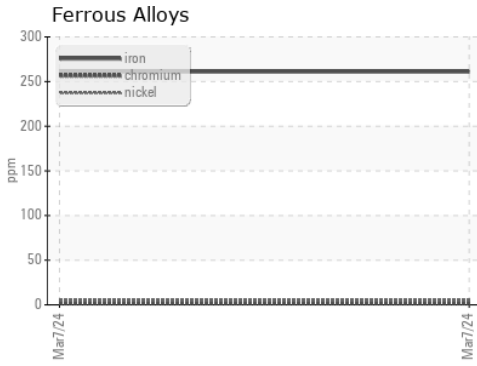

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0116023      **Received** : 09 May 2024  
**Lab Number** : 06174498      **Tested** : 10 May 2024  
**Unique Number** : 11020551      **Diagnosed** : 10 May 2024 - Wes Davis  
**Test Package** : FLEET

**PERDUE FARMS - BRIDGEVILLE**  
 8634 E NEWTON RD  
 BRIDGEVILLE, DE  
 US 19933  
 Contact: GEORGE LACATES

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: