


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

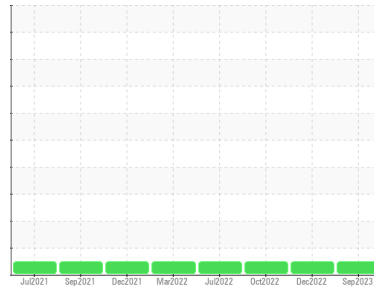

Machine Id  
**2126906**  
 Component  
**Transmission**  
 Fluid  
 {not provided} (--- QTS)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

### SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>PCA0105550</b>  | PCA0085290  | PCA0081173  |
| Sample Date   | Client Info |             | <b>01 Sep 2023</b> | 22 Dec 2022 | 11 Oct 2022 |
| Machine Age   | mls         | Client Info | <b>227516</b>      | 157436      | 142940      |
| Oil Age       | mls         | Client Info | <b>227516</b>      | 157436      | 142940      |
| Oil Changed   | Client Info |             | <b>N/A</b>         | Not Changd  | Not Changd  |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

### CONTAMINATION

|       | method    | limit/base | current    | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1       | <b>NEG</b> | NEG      | NEG      |

### WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >200 | <b>37</b>    | 31       | 31       |
| Chromium | ppm    | ASTM D5185m >10  | <b>&lt;1</b> | <1       | <1       |
| Nickel   | ppm    | ASTM D5185m      | <b>&lt;1</b> | <1       | <1       |
| Titanium | ppm    | ASTM D5185m      | <b>&lt;1</b> | <1       | 0        |
| Silver   | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >50  | <b>12</b>    | 9        | 8        |
| Lead     | ppm    | ASTM D5185m >50  | <b>&lt;1</b> | 0        | 1        |
| Copper   | ppm    | ASTM D5185m >200 | <b>28</b>    | 83       | 94       |
| Tin      | ppm    | ASTM D5185m >10  | <b>&lt;1</b> | 0        | <1       |
| Vanadium | ppm    | ASTM D5185m      | <b>&lt;1</b> | 0        | 0        |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |

### ADDITIVES

|            | method | limit/base  | current     | history1 | history2 |
|------------|--------|-------------|-------------|----------|----------|
| Boron      | ppm    | ASTM D5185m | <b>0</b>    | 2        | 3        |
| Barium     | ppm    | ASTM D5185m | <b>0</b>    | 0        | 0        |
| Molybdenum | ppm    | ASTM D5185m | <b>2</b>    | 1        | 1        |
| Manganese  | ppm    | ASTM D5185m | <b>6</b>    | 6        | 6        |
| Magnesium  | ppm    | ASTM D5185m | <b>2</b>    | 0        | <1       |
| Calcium    | ppm    | ASTM D5185m | <b>553</b>  | 639      | 692      |
| Phosphorus | ppm    | ASTM D5185m | <b>531</b>  | 574      | 598      |
| Zinc       | ppm    | ASTM D5185m | <b>77</b>   | 47       | 33       |
| Sulfur     | ppm    | ASTM D5185m | <b>3284</b> | 3984     | 3779     |


### CONTAMINANTS

|           | method | limit/base      | current      | history1 | history2 |
|-----------|--------|-----------------|--------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >50 | <b>50</b>    | 50       | 48       |
| Sodium    | ppm    | ASTM D5185m     | <b>&lt;1</b> | 2        | <1       |
| Potassium | ppm    | ASTM D5185m >20 | <b>2</b>     | <1       | 0        |

### VISUAL

|                  | method | limit/base    | current      | history1 | history2 |
|------------------|--------|---------------|--------------|----------|----------|
| White Metal      | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Precipitate      | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Silt             | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Debris           | scalar | *Visual NONE  | <b>LIGHT</b> | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual NONE  | <b>NONE</b>  | NONE     | NONE     |
| Appearance       | scalar | *Visual NORML | <b>NORML</b> | NORML    | NORML    |
| Odor             | scalar | *Visual NORML | <b>NORML</b> | NORML    | NORML    |
| Emulsified Water | scalar | *Visual >0.1  | <b>NEG</b>   | NEG      | NEG      |
| Free Water       | scalar | *Visual       | <b>NEG</b>   | NEG      | NEG      |

# OIL ANALYSIS REPORT



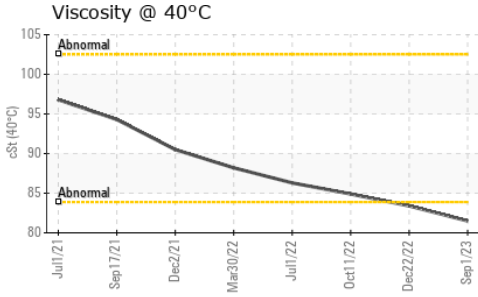


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445  | 81.5    | 83.4     | 84.9     |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

|        |          |          |          |
|--------|----------|----------|----------|
| Color  | no image | no image | no image |
| Bottom | no image | no image | no image |

## GRAPHS

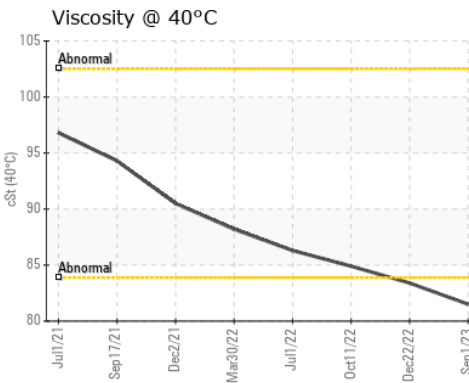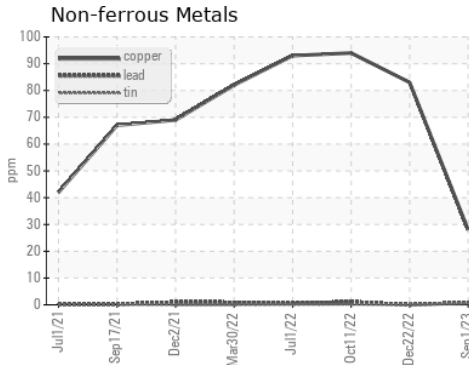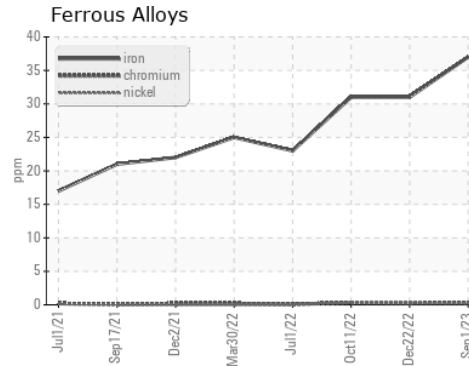

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0105550      **Received** : 09 May 2024  
**Lab Number** : 06174519      **Tested** : 10 May 2024  
**Unique Number** : 11020572      **Diagnosed** : 13 May 2024 - Don Baldrige  
**Test Package** : FLEET

**PERDUE FARMS - BRIDGEVILLE**  
 8634 E NEWTON RD  
 BRIDGEVILLE, DE  
 US 19933  
 Contact: GEORGE LACATES

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: