




OIL ANALYSIS REPORT

Sample Rating Trend

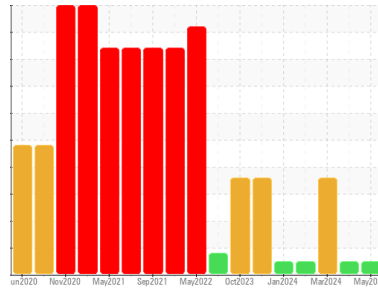

NORMAL



Area
(40957HA)
 Machine Id
826028-1018
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0111905	GFL0116574	GFL0111836	
Sample Date	Client Info	03 May 2024	08 Apr 2024	01 Mar 2024	
Machine Age	hrs	Client Info	18248	18138	18046
Oil Age	hrs	Client Info	17861	17843	295
Oil Changed	Client Info	Not Changed	Not Changed	Not Changed	
Sample Status		NORMAL	NORMAL	ABNORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	0.3	▲ 5.3
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	21	16	34
Chromium	ppm ASTM D5185m >4	1	2	2
Nickel	ppm ASTM D5185m >4	0	<1	<1
Titanium	ppm ASTM D5185m >2	<1	<1	1
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >15	2	2	● 9
Lead	ppm ASTM D5185m >50	<1	<1	3
Copper	ppm ASTM D5185m >55	2	2	3
Tin	ppm ASTM D5185m >4	<1	1	0
Vanadium	ppm ASTM D5185m	<1	<1	0
Cadmium	ppm ASTM D5185m	<1	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	13	11	20
Barium	ppm ASTM D5185m 0	0	<1	0
Molybdenum	ppm ASTM D5185m 60	61	57	45
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 1010	930	941	841
Calcium	ppm ASTM D5185m 1070	1162	1167	1698
Phosphorus	ppm ASTM D5185m 1150	1109	1116	1073
Zinc	ppm ASTM D5185m 1270	1251	1253	1307
Sulfur	ppm ASTM D5185m 2060	3353	3591	3169

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	6	6	▲ 22
Sodium	ppm ASTM D5185m	4	6	3
Potassium	ppm ASTM D5185m >20	11	20	2

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	1.4	1	0.3
Nitration	Abs/cm *ASTM D7624 >20	7.4	6.7	8.7
Sulfation	Abs/.1mm *ASTM D7415 >30	20.7	19.4	20.5


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	13.7	13.2	18.3
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.8	8.6	7.8




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

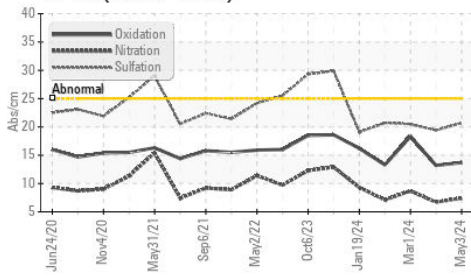

Base Number

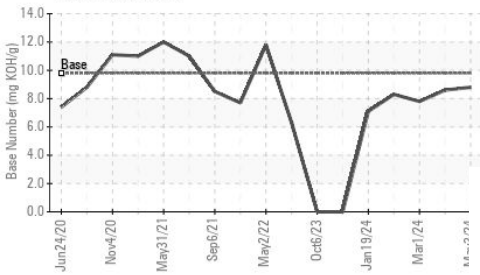

Viscosity @ 100°C

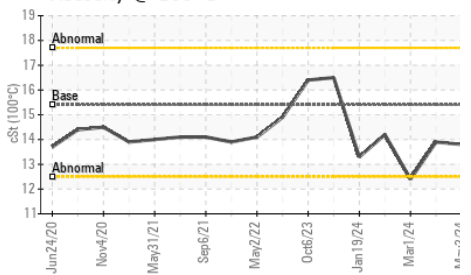


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	13.9 ▲ 12.4

GRAPHS


Ferrous Alloys

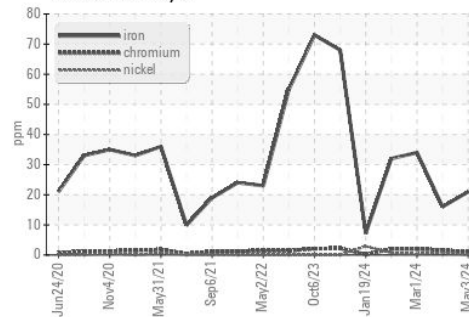


Non-ferrous Metals

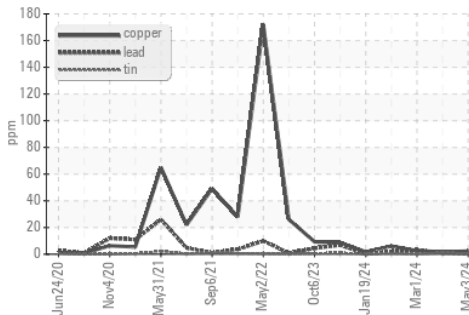

Viscosity @ 100°C

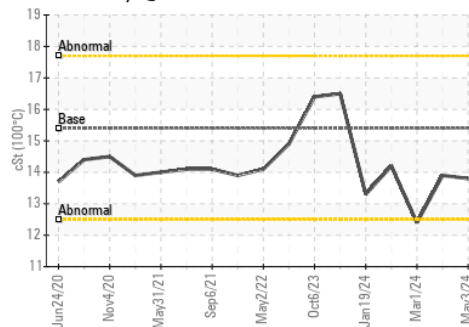

Base Number

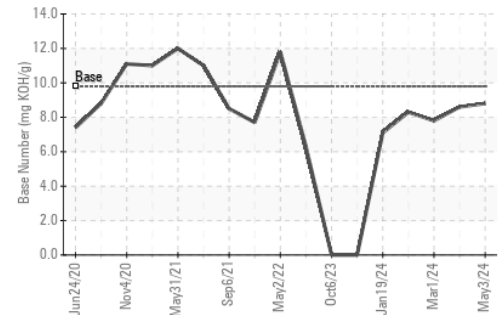

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0111905
 Lab Number : 06174938
 Unique Number : 11020991
 Test Package : FLEET

Received : 09 May 2024
 Tested : 10 May 2024
 Diagnosed : 10 May 2024 - Wes Davis

GFL Environmental - 652 - Fredericksburg Hauling
 10954 Houser Drive
 Fredericksburg, VA
 US 22408

Contact: WILLIAM MILO
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: