




# OIL ANALYSIS REPORT

Sample Rating Trend

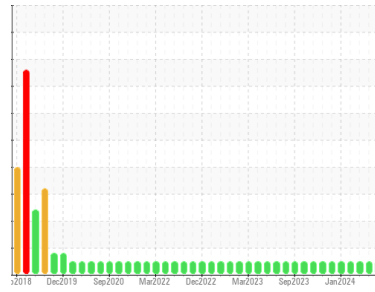

**NORMAL**



Area  
**(D705HW)**

Machine Id

**2718**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (40 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0098904</b>	GFL0098879	GFL0098885
Sample Date	Client Info		<b>02 May 2024</b>	22 Apr 2024	10 Apr 2024
Machine Age	hrs	Client Info	<b>14898</b>	14595	14748
Oil Age	hrs	Client Info	<b>12849</b>	602	14062
Oil Changed	Client Info		<b>N/A</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >165	<b>10</b>	12	11
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	3
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	1	3
Lead	ppm	ASTM D5185m >150	<b>&lt;1</b>	0	1
Copper	ppm	ASTM D5185m >90	<b>&lt;1</b>	0	26
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	2
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	2	<1
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>59</b>	57	56
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	1
Magnesium	ppm	ASTM D5185m 1010	<b>916</b>	872	823
Calcium	ppm	ASTM D5185m 1070	<b>1115</b>	1248	1051
Phosphorus	ppm	ASTM D5185m 1150	<b>1080</b>	1047	1006
Zinc	ppm	ASTM D5185m 1270	<b>1220</b>	1226	1106
Sulfur	ppm	ASTM D5185m 2060	<b>3180</b>	3427	3174

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >35	<b>4</b>	4	7
Sodium	ppm	ASTM D5185m	<b>3</b>	3	<1
Potassium	ppm	ASTM D5185m >20	<b>3</b>	<1	6

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >7.5	<b>0.2</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.4</b>	8.0	5.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.0</b>	19.3	17.9


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.8</b>	15.2	13.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.7</b>	7.8	8.1




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

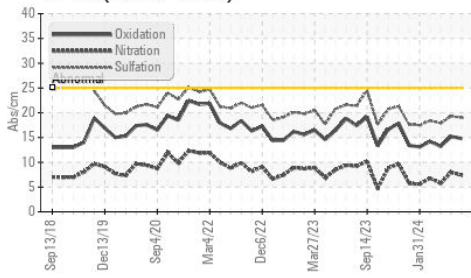

Base Number

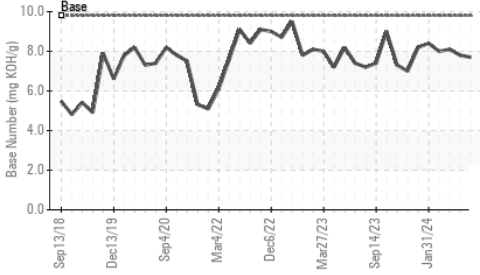

Viscosity @ 100°C

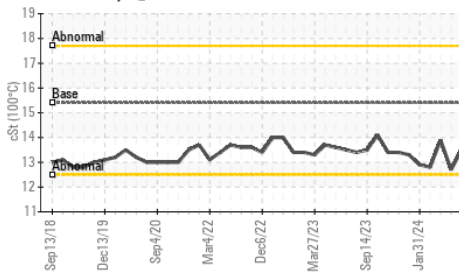

## VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

## FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	12.7

## GRAPHS


Ferrous Alloys

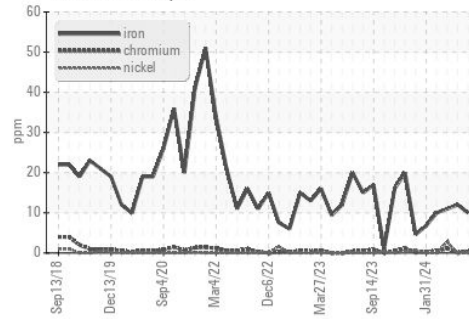


Non-ferrous Metals

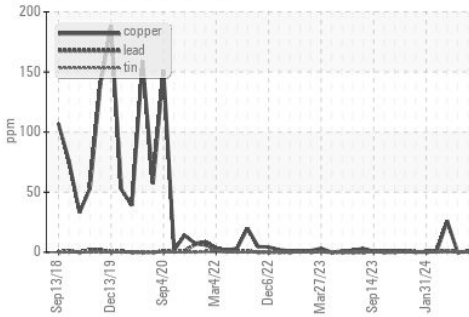

Viscosity @ 100°C

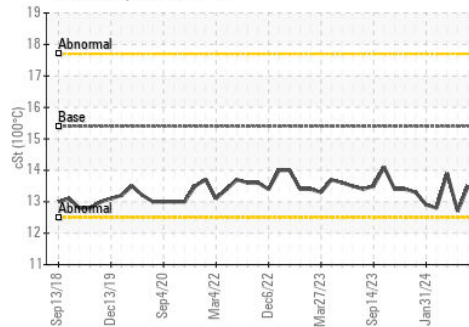

Base Number

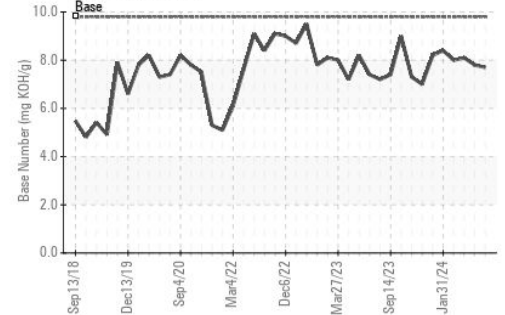

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0098904  
 Lab Number : 06174956  
 Unique Number : 11021009  
 Test Package : FLEET

Received : 09 May 2024  
 Tested : 10 May 2024  
 Diagnosed : 10 May 2024 - Wes Davis

GFL Environmental - 084 - Clarksville  
 699 Jack Miller Boulevard  
 Clarksville, TN  
 US 37042

Contact: ROBERT THIBAUT  
 robert.thibault@gflenv.com

T: (931)552-7276

F: (931)572-9674

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)