




# OIL ANALYSIS REPORT

Sample Rating Trend

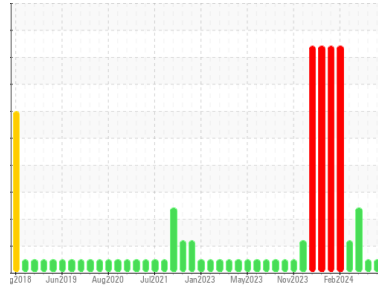

**NORMAL**



Machine Id  
**10867**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (40 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0098902</b>	GFL0098905	GFL0098882
Sample Date	Client Info		<b>03 May 2024</b>	17 Apr 2024	20 Mar 2024
Machine Age	mls	Client Info	<b>226164</b>	219035	219035
Oil Age	mls	Client Info	<b>204515</b>	204515	204515
Oil Changed	Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	<b>20</b>	9	16
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	2	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m >15	<b>5</b>	2	3
Lead	ppm	ASTM D5185m >25	<b>0</b>	1	<1
Copper	ppm	ASTM D5185m >100	<b>&lt;1</b>	2	2
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Barium	ppm	ASTM D5185m 0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m 60	<b>58</b>	58	63
Manganese	ppm	ASTM D5185m 0	<b>0</b>	1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>859</b>	851	830
Calcium	ppm	ASTM D5185m 1070	<b>1049</b>	1034	1040
Phosphorus	ppm	ASTM D5185m 1150	<b>1003</b>	870	917
Zinc	ppm	ASTM D5185m 1270	<b>1163</b>	1093	1095
Sulfur	ppm	ASTM D5185m 2060	<b>2974</b>	2964	2821

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>12</b>	4	5
Sodium	ppm	ASTM D5185m	<b>37</b>	0	▲ 117
Potassium	ppm	ASTM D5185m >20	<b>34</b>	2	▲ 112

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.3</b>	0.4	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.4</b>	6.1	7.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.8</b>	17.7	18.4


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.7</b>	12.9	14.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.1</b>	7.8	8.1




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

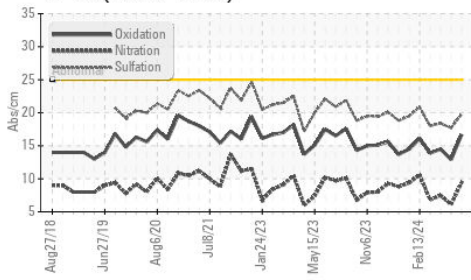

Base Number

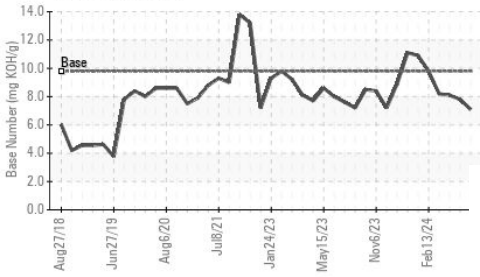

Viscosity @ 100°C

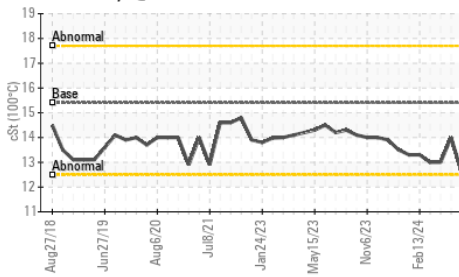

## VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

## FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.6	14.0

## GRAPHS


Ferrous Alloys

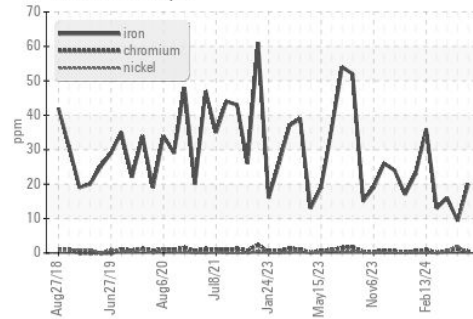


Non-ferrous Metals

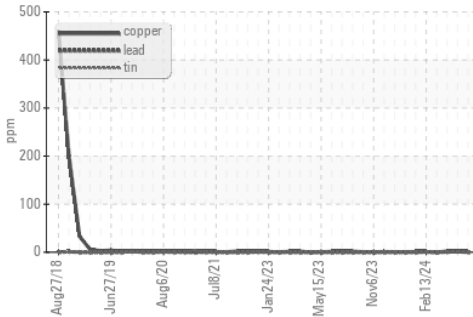

Viscosity @ 100°C

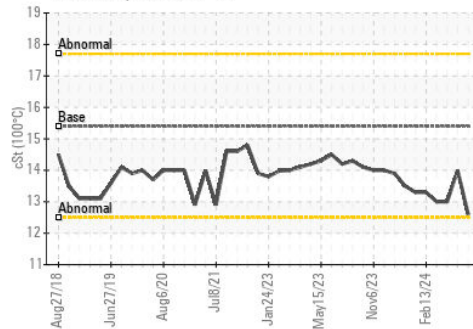

Base Number

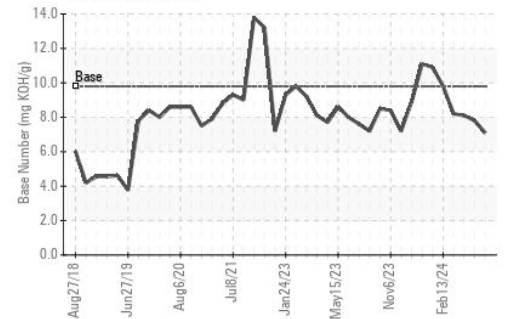

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0098902  
**Lab Number** : 06174958  
**Unique Number** : 11021011  
**Test Package** : FLEET

**Received** : 09 May 2024  
**Tested** : 10 May 2024  
**Diagnosed** : 10 May 2024 - Wes Davis

**GFL Environmental - 084 - Clarksville**  
 699 Jack Miller Boulevard  
 Clarksville, TN  
 US 37042

Contact: ROBERT THIBAUT  
 robert.thibault@gflenv.com

T: (931)552-7276

F: (931)572-9674

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)