




# OIL ANALYSIS REPORT

Sample Rating Trend

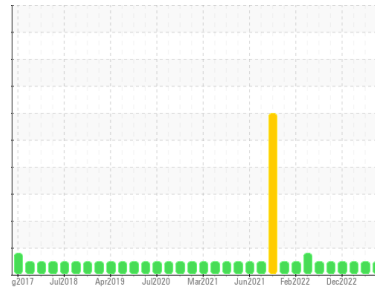

**NORMAL**



Area  
**(P618187)**  
 Machine Id  
**2684C**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (40 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0101770</b>	GFL0101794	GFL0074971
Sample Date	Client Info		<b>30 Apr 2024</b>	31 Jan 2024	18 Jul 2023
Machine Age	hrs	Client Info	<b>14952</b>	14325	13830
Oil Age	hrs	Client Info	<b>602</b>	600	600
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>23</b>	15	13
Chromium	ppm	ASTM D5185m >4	<b>3</b>	1	2
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >9	<b>2</b>	7	2
Lead	ppm	ASTM D5185m >30	<b>14</b>	9	11
Copper	ppm	ASTM D5185m >35	<b>2</b>	2	<1
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>21</b>	15	15
Barium	ppm	ASTM D5185m 5	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m 50	<b>60</b>	56	60
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 560	<b>667</b>	607	819
Calcium	ppm	ASTM D5185m 1510	<b>1881</b>	1677	1848
Phosphorus	ppm	ASTM D5185m 780	<b>972</b>	835	945
Zinc	ppm	ASTM D5185m 870	<b>1134</b>	1010	1183
Sulfur	ppm	ASTM D5185m 2040	<b>2905</b>	2514	3191

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>8</b>	16	6
Sodium	ppm	ASTM D5185m	<b>14</b>	8	10
Potassium	ppm	ASTM D5185m >20	<b>20</b>	25	2

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>14.0</b>	12.9	12.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>28.9</b>	28.0	27.8


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>28.2</b>	25.2	25.9
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>3.2</b>	4.4	4.3




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

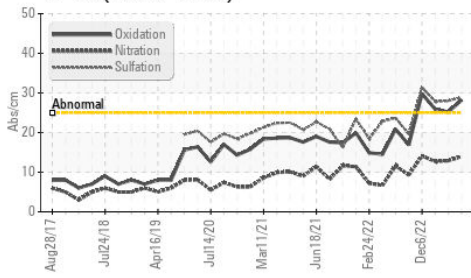

Base Number

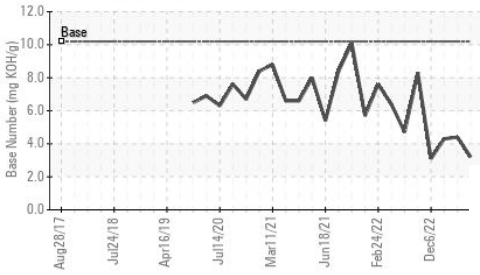

Viscosity @ 100°C

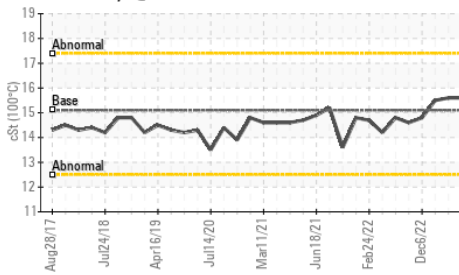

## VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

## FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	15.6	15.5

## GRAPHS


Ferrous Alloys

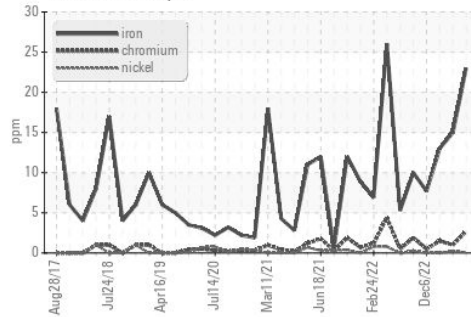


Non-ferrous Metals

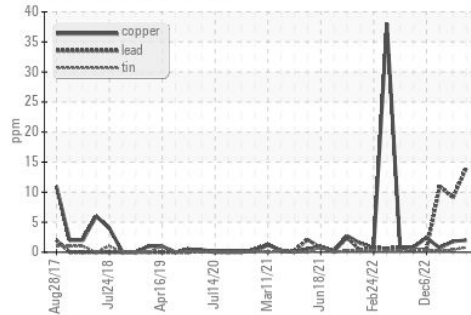

Viscosity @ 100°C

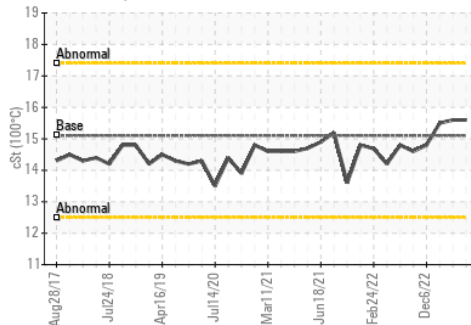

Base Number

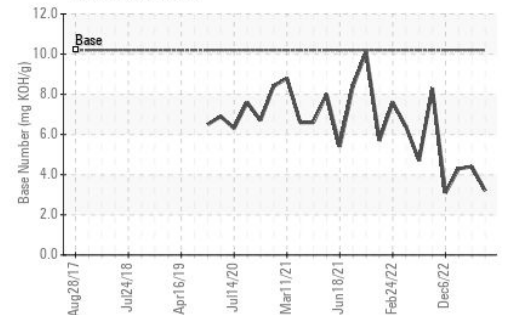

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0101770  
 Lab Number : 06174965  
 Unique Number : 11021018  
 Test Package : FLEET

Received : 09 May 2024  
 Tested : 10 May 2024  
 Diagnosed : 13 May 2024 - Don Baldrige

GFL Environmental - 030 - Conway Myrtle Beach  
 3010 HWY 378  
 Conway, SC  
 US 29527  
 Contact: ARCILIO RUEZ  
 aruiz@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: