

# **OIL ANALYSIS REPORT**

Sample Rating Trend



Machine Id **DT642** Component

Diesel Engine

PETRO CANADA DURON SHP 10W30 (--- QTS)

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the


### **Fluid Condition**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


QTS)		Aug	2023	Dec2023 Apr20	24	
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0124368	PCA0111647	PCA0101873
Sample Date		Client Info		30 Apr 2024	12 Dec 2023	28 Aug 2023
Machine Age	mls	Client Info		0	0	0
Oil Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
WEAR METAL	.S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	7	5	7
Chromium	ppm	ASTM D5185m	>20	<1	0	0
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	2	3	4
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	1	<1	2
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	2	8	5
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	50	71	71	61
Manganese	ppm	ASTM D5185m	0	0	<1	<1
Magnesium	ppm	ASTM D5185m	950	969	884	965
Calcium	ppm	ASTM D5185m	1050	1149	1078	1079
Phosphorus	ppm	ASTM D5185m	995	1124	976	1038
Zinc	ppm	ASTM D5185m	1180	1286	1194	1289
Sulfur	ppm	ASTM D5185m	2600	3200	2695	2866
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4	4	3
Sodium	ppm	ASTM D5185m		<1	1	2
Potassium	ppm	ASTM D5185m	>20	5	4	7
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.4	0.4	0.5
Nitration	Abs/cm	*ASTM D7624	>20	9.3	8.8	9.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.6	19.8	20.5
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.0	16.2	16.9
Base Number (BN)	mg KOH/g	ASTM D2896		6.9	7.0	6.8




# **OIL ANALYSIS REPORT**








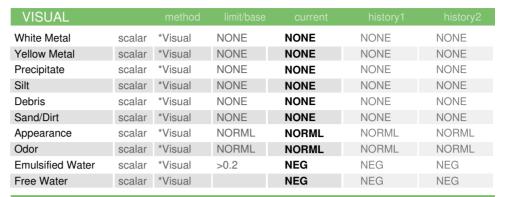



FLUID PROP	ERHES	method				history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.8	10.7	11.1

## **GRAPHS**



10 -	Non-lemous Metals		
8-	copper copper seementeen lead		
6 - E			
udd 4-			
2			
0	33	2	4
	Aug28/23	Dec12/23	Apr30/24
	Viscosity @ 100°C		









Certificate 12367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Lab Number : 06174969 Unique Number : 11021022

: PCA0124368 Test Package : FLEET

Received **Tested** 

: 09 May 2024 : 10 May 2024

Diagnosed : 10 May 2024 - Wes Davis

**NW WHITE & CO - BEAUFORT DIVISION** 1491 YENMASSEE HIGHWAY VARNVILLE, SC

US 29944

Contact: VINCENT BULLOCK bullockvince514@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: