

# OIL ANALYSIS REPORT

## Sample Rating Trend



**WEAR**



Machine Id  
**798062**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

Piston, ring and cylinder wear is indicated.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

### SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info |             | <b>PCA0121017</b>  | ---      | ---      |
| Sample Date   | Client Info |             | <b>10 Apr 2024</b> | ---      | ---      |
| Machine Age   | mls         | Client Info | <b>426262</b>      | ---      | ---      |
| Oil Age       | mls         | Client Info | <b>0</b>           | ---      | ---      |
| Oil Changed   | Client Info |             | <b>Changed</b>     | ---      | ---      |
| Sample Status |             |             | <b>ABNORMAL</b>    | ---      | ---      |

### CONTAMINATION

|        | method    | limit/base | current        | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel   | WC Method | >5         | <b>&lt;1.0</b> | ---      | ---      |
| Water  | WC Method | >0.2       | <b>NEG</b>     | ---      | ---      |
| Glycol | WC Method |            | <b>NEG</b>     | ---      | ---      |

### WEAR METALS

|          | method | limit/base       | current      | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >100 | <b>▲ 98</b>  | ---      | ---      |
| Chromium | ppm    | ASTM D5185m >20  | <b>3</b>     | ---      | ---      |
| Nickel   | ppm    | ASTM D5185m >4   | <b>&lt;1</b> | ---      | ---      |
| Titanium | ppm    | ASTM D5185m      | <b>0</b>     | ---      | ---      |
| Silver   | ppm    | ASTM D5185m >3   | <b>0</b>     | ---      | ---      |
| Aluminum | ppm    | ASTM D5185m >20  | <b>▲ 29</b>  | ---      | ---      |
| Lead     | ppm    | ASTM D5185m >40  | <b>0</b>     | ---      | ---      |
| Copper   | ppm    | ASTM D5185m >330 | <b>8</b>     | ---      | ---      |
| Tin      | ppm    | ASTM D5185m >15  | <b>0</b>     | ---      | ---      |
| Vanadium | ppm    | ASTM D5185m      | <b>0</b>     | ---      | ---      |
| Cadmium  | ppm    | ASTM D5185m      | <b>0</b>     | ---      | ---      |

### ADDITIVES

|            | method | limit/base       | current     | history1 | history2 |
|------------|--------|------------------|-------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 2    | <b>5</b>    | ---      | ---      |
| Barium     | ppm    | ASTM D5185m 0    | <b>0</b>    | ---      | ---      |
| Molybdenum | ppm    | ASTM D5185m 50   | <b>77</b>   | ---      | ---      |
| Manganese  | ppm    | ASTM D5185m 0    | <b>1</b>    | ---      | ---      |
| Magnesium  | ppm    | ASTM D5185m 950  | <b>949</b>  | ---      | ---      |
| Calcium    | ppm    | ASTM D5185m 1050 | <b>1288</b> | ---      | ---      |
| Phosphorus | ppm    | ASTM D5185m 995  | <b>1031</b> | ---      | ---      |
| Zinc       | ppm    | ASTM D5185m 1180 | <b>1246</b> | ---      | ---      |
| Sulfur     | ppm    | ASTM D5185m 2600 | <b>2751</b> | ---      | ---      |

### CONTAMINANTS

|           | method | limit/base      | current   | history1 | history2 |
|-----------|--------|-----------------|-----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25 | <b>6</b>  | ---      | ---      |
| Sodium    | ppm    | ASTM D5185m     | <b>5</b>  | ---      | ---      |
| Potassium | ppm    | ASTM D5185m >20 | <b>11</b> | ---      | ---      |






### INFRA-RED

|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 >3  | <b>1.5</b>  | ---      | ---      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>13.4</b> | ---      | ---      |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>27.0</b> | ---      | ---      |

### FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>25.1</b> | ---      | ---      |
| Base Number (BN) | mg KOH/g | ASTM D2896      | <b>4.3</b>  | ---      | ---      |









# OIL ANALYSIS REPORT

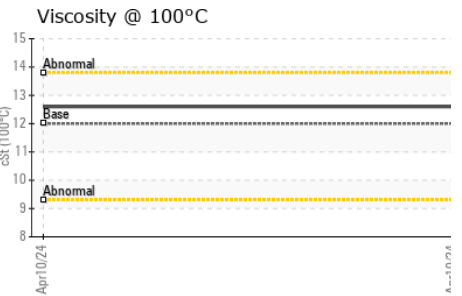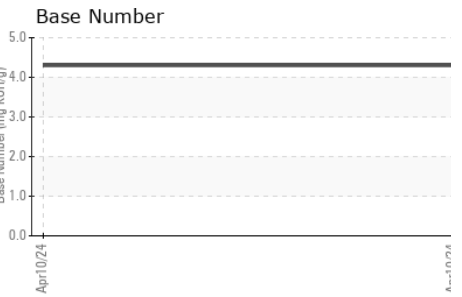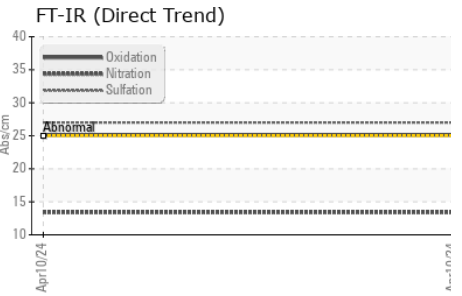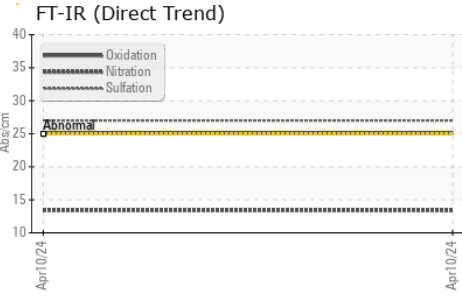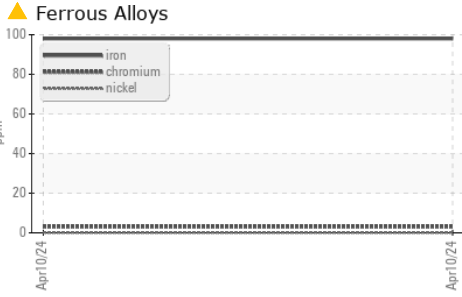

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | ---      |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | ---      |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | ---      |
| Silt             | scalar | *Visual    | NONE    | NONE     | ---      |
| Debris           | scalar | *Visual    | NONE    | NONE     | ---      |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | ---      |
| Appearance       | scalar | *Visual    | NORML   | NORML    | ---      |
| Odor             | scalar | *Visual    | NORML   | NORML    | ---      |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | ---      |
| Free Water       | scalar | *Visual    |         | NEG      | ---      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 12.00   | 12.6     | ---      |

## GRAPHS

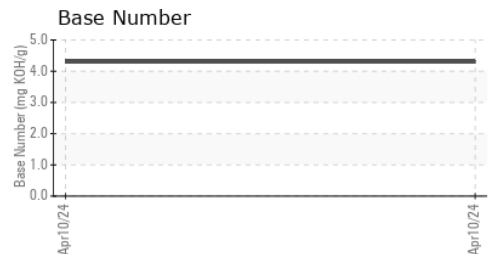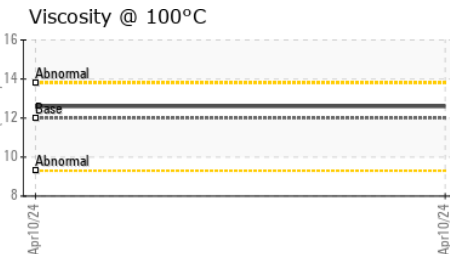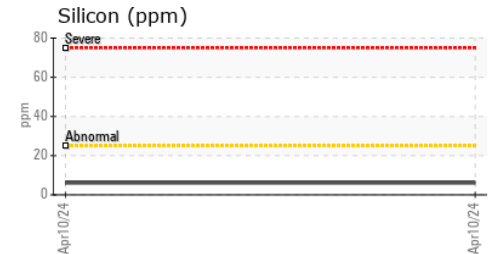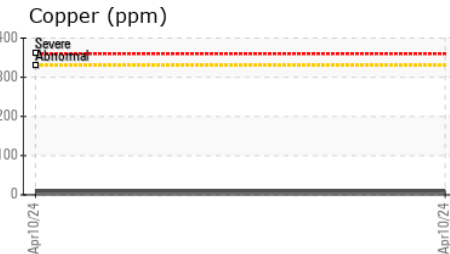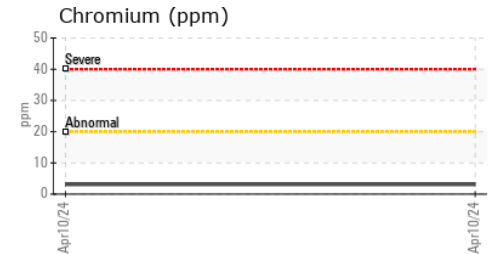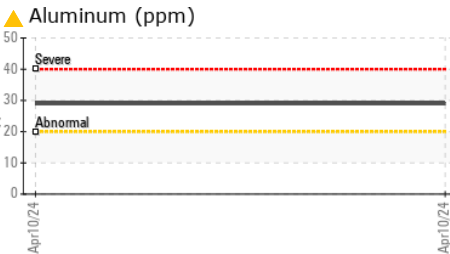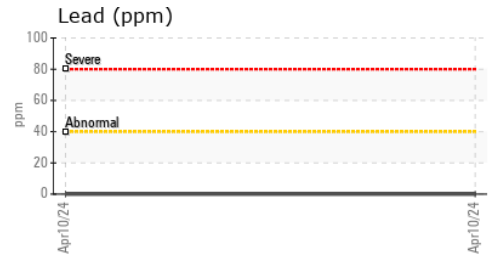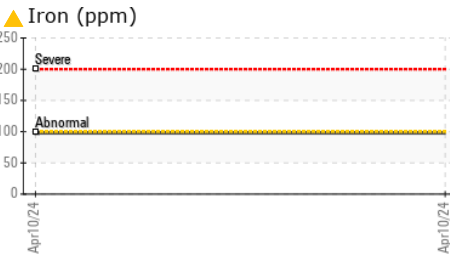

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0121017      **Received** : 10 May 2024  
**Lab Number** : 06175127      **Tested** : 13 May 2024  
**Unique Number** : 11021180      **Diagnosed** : 13 May 2024 - Sean Felton  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #114**  
 63 REPAUPO STATION ROAD  
 LOGAN TOWNSHIP, NJ  
 US 08085  
 Contact: ED DAVIS  
 edavis@millertransgroup.com  
 T: (856)214-3521  
 F: (856)214-3663

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)