


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

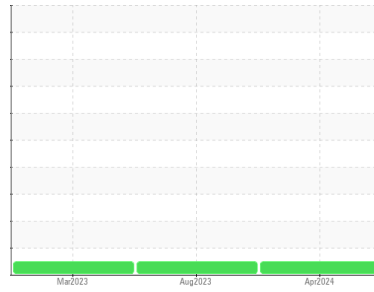

Area  
**(TEMP) Walgreens - Yard Horse**  
 Machine Id  
**[Walgreens - Yard Horse] 136A87005**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (6 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0107539</b>	PCA0094399	PCA0092026
Sample Date	Client Info		<b>22 Apr 2024</b>	08 Aug 2023	02 Mar 2023
Machine Age	hrs	Client Info	<b>11455</b>	10095	9893
Oil Age	hrs	Client Info	<b>11455</b>	10095	9893
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>23</b>	14	40
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	3	6
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>0</b>	<1	16
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>3</b>	6	49
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>62</b>	61	38
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	2
Magnesium	ppm	ASTM D5185m 950	<b>916</b>	1005	461
Calcium	ppm	ASTM D5185m 1050	<b>1082</b>	1145	1125
Phosphorus	ppm	ASTM D5185m 995	<b>1009</b>	1051	877
Zinc	ppm	ASTM D5185m 1180	<b>1210</b>	1289	855
Sulfur	ppm	ASTM D5185m 2600	<b>3235</b>	3704	2538

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>14</b>	3	9
Sodium	ppm	ASTM D5185m	<b>26</b>	2	12
Potassium	ppm	ASTM D5185m >20	<b>2</b>	3	4




### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.6</b>	7.6	7.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.3</b>	18.1	25.9

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.6</b>	14.6	24.0
Base Number (BN)	mg KOH/g	ASTM D2896	<b>6.0</b>	8.1	7.6





# OIL ANALYSIS REPORT

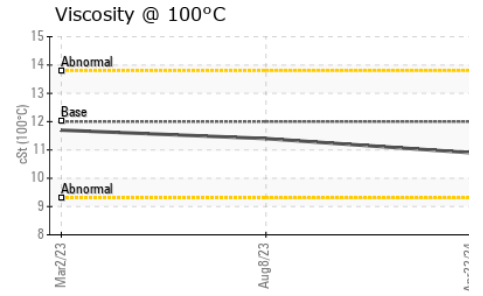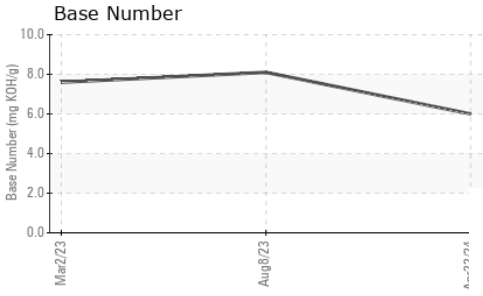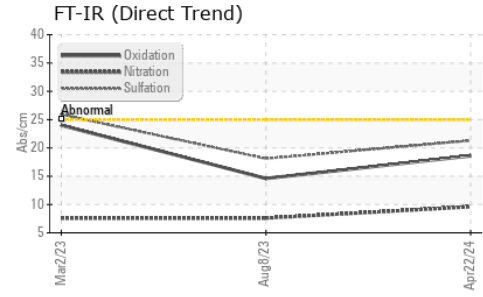

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	10.9	11.4

## GRAPHS

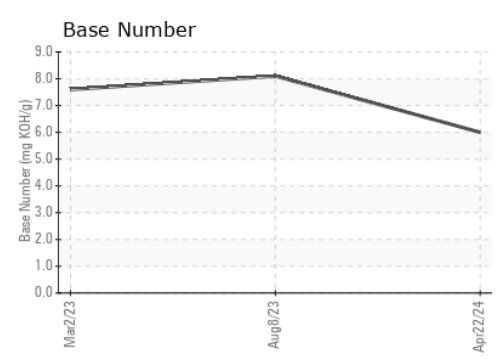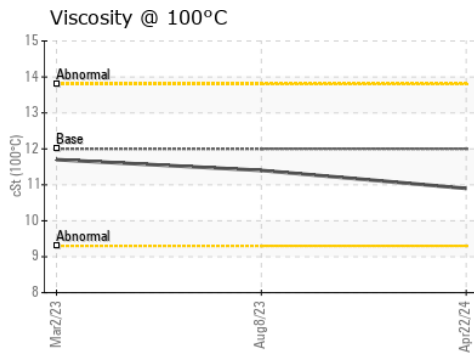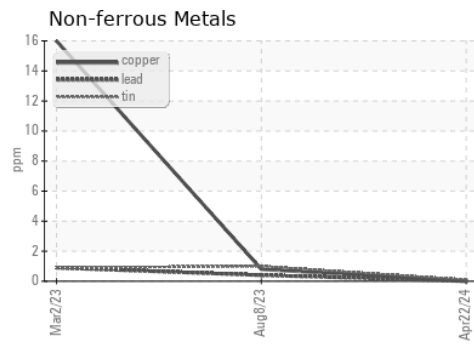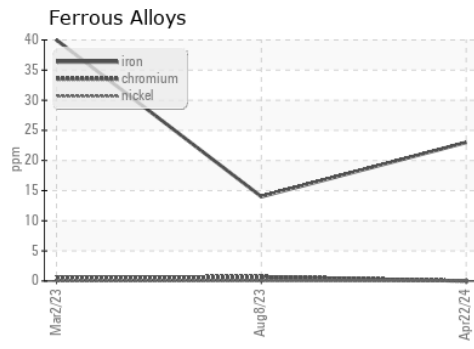

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0107539      **Received** : 10 May 2024  
**Lab Number** : 06175263      **Tested** : 13 May 2024  
**Unique Number** : 11021316      **Diagnosed** : 13 May 2024 - Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1367 - Berkeley-Jupiter**  
 15998 Walgreens Drive  
 Jupiter, FL 33478  
 Contact: Manny Gonzalez  
 egonzalez@transervice.com  
 T: (561)776-0755  
 F: (561)776-0799

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)