


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

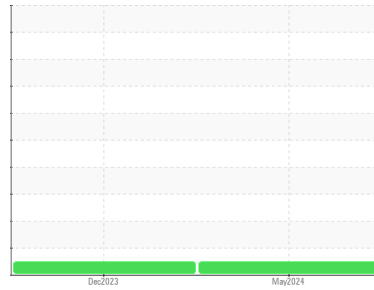

Area  
**NWW GREENWOOD**

Machine Id  
**DT793**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (38 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0102327</b>	PCA0102392	---
Sample Date	Client Info			<b>09 May 2024</b>	04 Dec 2023	---
Machine Age	mls	Client Info		<b>162238</b>	139124	---
Oil Age	mls	Client Info		<b>0</b>	25000	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>110	<b>21</b>	53	---
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	3	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>7</b>	11	---
Lead	ppm	ASTM D5185m	>45	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>85	<b>&lt;1</b>	5	---
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>3</b>	4	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	50	<b>65</b>	68	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	1	---
Magnesium	ppm	ASTM D5185m	950	<b>920</b>	982	---
Calcium	ppm	ASTM D5185m	1050	<b>1173</b>	1205	---
Phosphorus	ppm	ASTM D5185m	995	<b>1077</b>	1075	---
Zinc	ppm	ASTM D5185m	1180	<b>1266</b>	1339	---
Sulfur	ppm	ASTM D5185m	2600	<b>3195</b>	2478	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>6</b>	9	---
Sodium	ppm	ASTM D5185m		<b>2</b>	2	---
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	15	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	1	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.6</b>	12.1	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.9</b>	25.8	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.2</b>	23.4	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.4</b>	4.8	---






# OIL ANALYSIS REPORT

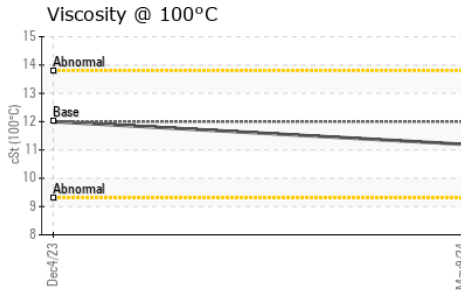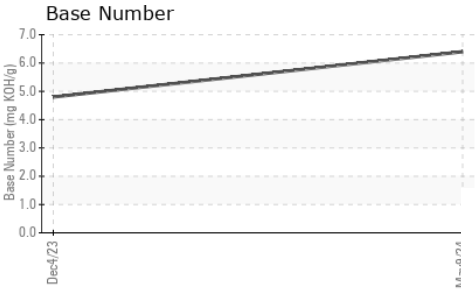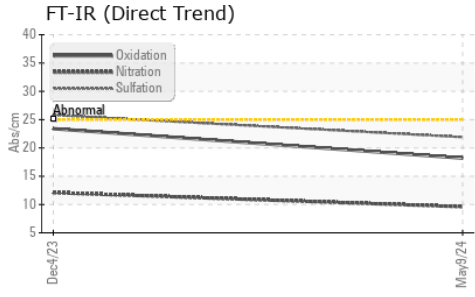

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.2	12.0

## GRAPHS

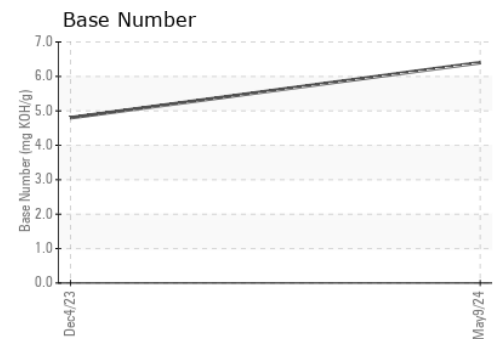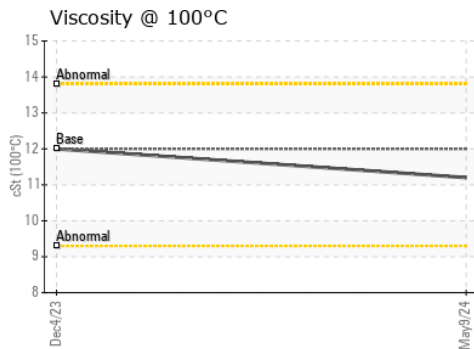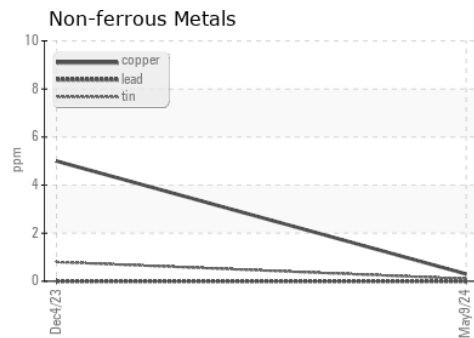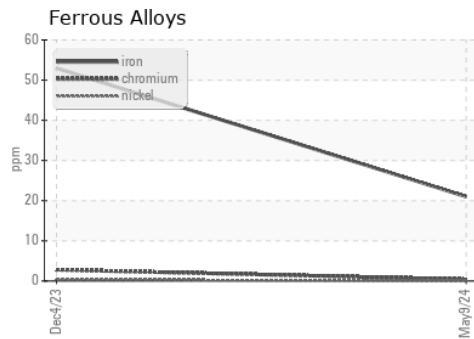

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0102327  
**Lab Number** : 06175298  
**Unique Number** : 11021351  
**Test Package** : FLEET

**Received** : 10 May 2024  
**Tested** : 13 May 2024  
**Diagnosed** : 13 May 2024 - Wes Davis

**NW WHITE & CO - GREENWOOD DIVISION**  
 411 QUARRY ROAD  
 GREENWOOD, SC  
 US 29149

Contact: Mitchell Brown  
 greenwoodshop@nwwhite.com  
 T: (864)389-9553

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: