OIL DIAGNOSTICS

OIL ANALYSIS REPORT

Sample Rating Trend

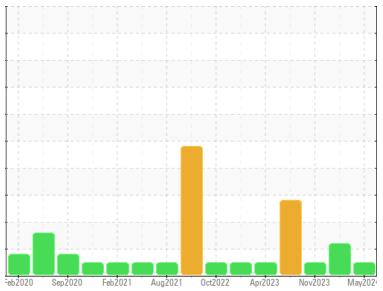

NORMAL

Area
Process Cheese [98968116]
Machine Id
BLENDER 11
Component
Gearbox
Fluid
GEAR OIL ISO 320 (--- GAL)

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**PCA0120256**	PCA0117981	PCA0101651
Sample Date		Client Info		**06 May 2024**	08 Feb 2024	16 Nov 2023
Machine Age	hrs	Client Info		**0**	0	0
Oil Age	hrs	Client Info		**0**	0	0
Oil Changed		Client Info		**Filtered**	Filtered	Filtered
Sample Status				**NORMAL**	ATTENTION	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water		WC Method	>0.2	**NEG**	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	**0**	0	<1
Chromium	ppm	ASTM D5185m	>15	**<1**	0	<1
Nickel	ppm	ASTM D5185m	>15	**0**	0	<1
Titanium	ppm	ASTM D5185m		**<1**	0	<1
Silver	ppm	ASTM D5185m		**0**	0	0
Aluminum	ppm	ASTM D5185m	>25	**2**	0	2
Lead	ppm	ASTM D5185m	>100	**0**	0	0
Copper	ppm	ASTM D5185m	>200	**<1**	<1	<1
Tin	ppm	ASTM D5185m	>25	**<1**	<1	<1
Vanadium	ppm	ASTM D5185m		**<1**	0	0
Cadmium	ppm	ASTM D5185m		**0**	0	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	**0**	0	0
Barium	ppm	ASTM D5185m	15	**0**	0	4
Molybdenum	ppm	ASTM D5185m	15	**0**	0	<1
Manganese	ppm	ASTM D5185m		**0**	<1	<1
Magnesium	ppm	ASTM D5185m	50	**<1**	0	0
Calcium	ppm	ASTM D5185m	50	**<1**	0	0
Phosphorus	ppm	ASTM D5185m	350	**497**	418	507
Zinc	ppm	ASTM D5185m	100	**0**	<1	0
Sulfur	ppm	ASTM D5185m	12500	**1173**	1067	1278

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	**3**	3	5
Sodium	ppm	ASTM D5185m		**0**	0	0
Potassium	ppm	ASTM D5185m	>20	**1**	0	<1

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>1300	**355**	1462	158
Particles >6µm		ASTM D7647	>320	**71**	371	43
Particles >14µm		ASTM D7647	>80	**12**	20	5
Particles >21µm		ASTM D7647	>20	**2**	5	1
Particles >38µm		ASTM D7647	>4	**0**	0	0
Particles >71µm		ASTM D7647	>3	**0**	0	0
Oil Cleanliness		ISO 4406 (c)	>17/15/13	**16/13/11**	18/16/11	14/13/10

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.85	**0.38**	0.37	0.38

OIL DIAGNOSTICS

OIL ANALYSIS REPORT

Particle Trend

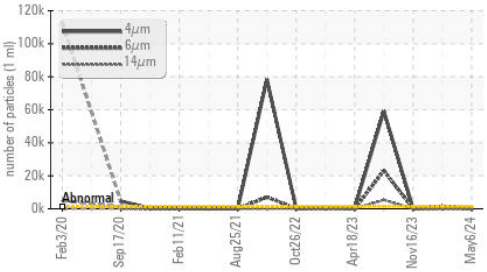

Acid Number

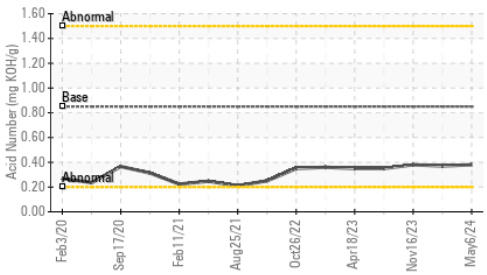

Viscosity @ 40°C

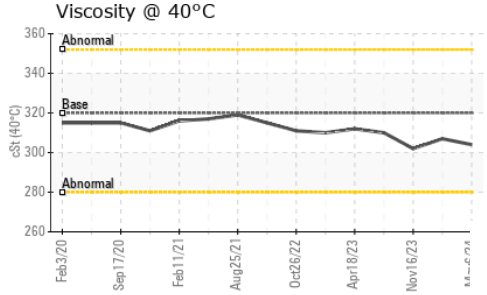

Particle Trend

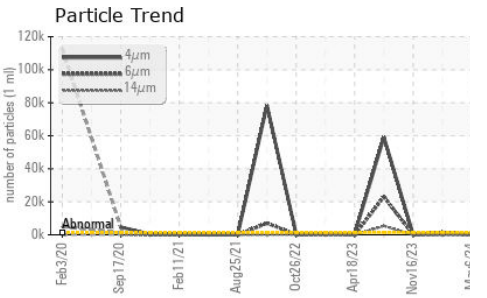

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	NONE
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	NONE
Silt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Debris	scalar	*Visual	NONE	**NONE**	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	NONE
Appearance	scalar	*Visual	NORML	**NORML**	NORML	NORML
Odor	scalar	*Visual	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	**NEG**	NEG	NEG
Free Water	scalar	*Visual		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	320	**304**	307	302

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

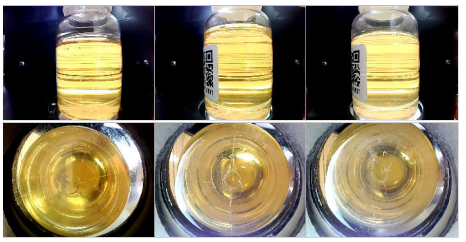

GRAPHS

Ferrous Alloys

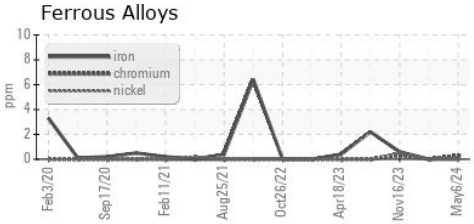

Non-ferrous Metals

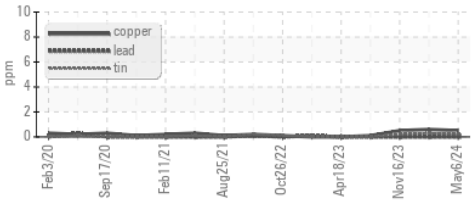

Viscosity @ 40°C

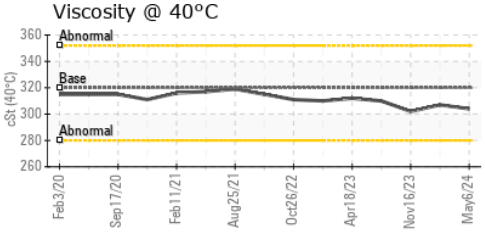

Particle Count

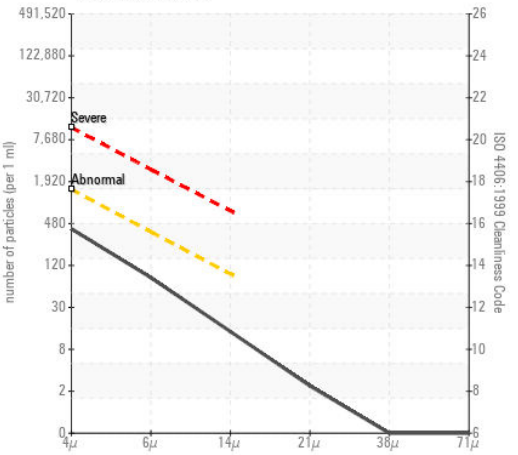

Acid Number

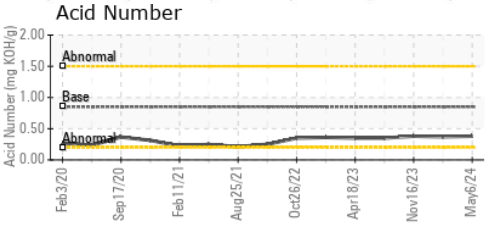

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0120256
Lab Number : 06175427
Unique Number : 11021480
Test Package : IND 2 (Additional Tests: PrtCount)

Received : 10 May 2024
Tested : 13 May 2024
Diagnosed : 14 May 2024 - Don Baldridge

Certificate L2367

KraftHeinz - Springfield - Plant 8311 PCA
2035 E BENNETT
SPRINGFIELD, MO
US 65804
Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: