

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

SCOF [98996107] 6410/6420 NORTH

Gearbox

GEAR OIL ISO 460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



Sample Number		Client Info		PCA0120257	PCA0088297	PCA0067375
Sample Date		Client Info		01 May 2024	29 Mar 2023	17 Jun 2022
Machine Age	hrs	Client Info		01 May 2024	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	1110	Client Info		Filtered	Filtered	Filtered
Sample Status		Oliciti IIIIo		NORMAL	NORMAL	NORMAL
	FIGN					
CONTAMINAT	IION	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
WEAR METAL	LS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	5	6	8
Chromium	ppm	ASTM D5185m	>15	<1	0	0
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m		3	1	7
Lead	ppm	ASTM D5185m	>100	0	0	<1
Copper	ppm	ASTM D5185m	>200	<1	0	0
Tin	ppm	ASTM D5185m	>25	<1	0	0
Antimony	ppm	ASTM D5185m	>5			
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	0	0	0
Barium	ppm	ASTM D5185m	15	0	0	2
Molybdenum	ppm	ASTM D5185m	15	0	<1	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m	50	<1	<1	0
Calcium	ppm	ASTM D5185m	50	3	3	4
Phosphorus	ppm	ASTM D5185m	350	377	304	336
Zinc	ppm	ASTM D5185m	100	7	10	13
Sulfur	ppm	ASTM D5185m	12500	411	393	372
CONTAMINA	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<1	<1	1
Sodium	ppm	ASTM D5185m		0	1	0
Potassium	ppm	ASTM D5185m	>20	2	<1	1
FLUID CLEAN	ILINES	S method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>1300	452	527	495
Particles >6µm		ASTM D7647	>320	84	157	65
Particles >14µm		ASTM D7647	>80	19	24	10
Particles >21µm		ASTM D7647	>20	6	4	4
Particles >38µm		ASTM D7647	>4	1	0	1
Particles >71µm		ASTM D7647	>3	0	0	1
Oil Cleanliness		ISO 4406 (c)	>17/15/13	16/14/11	16/14/12	16/13/10
		. ,				



OIL ANALYSIS REPORT

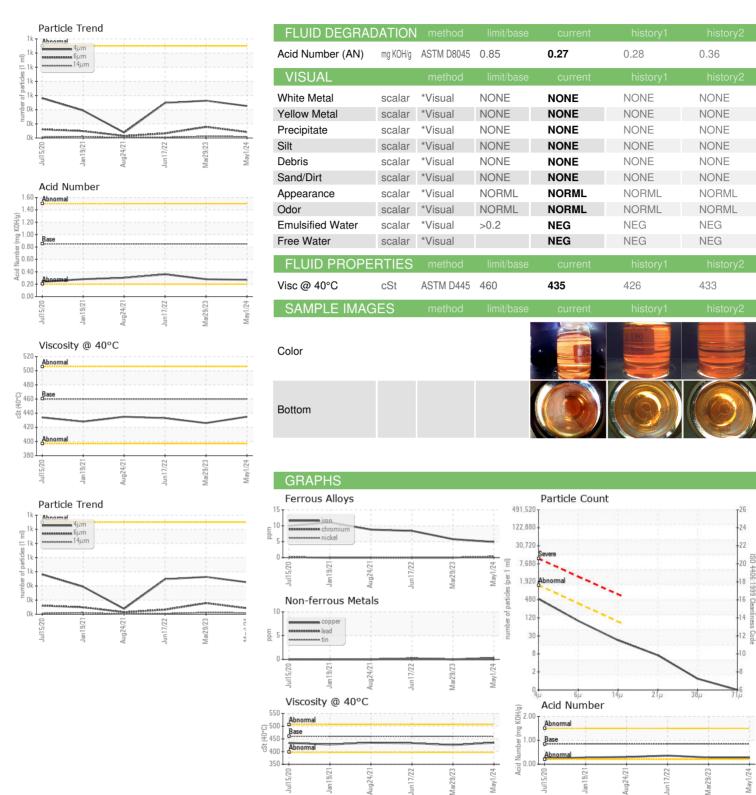





Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Lab Number : 06175428

: PCA0120257 Unique Number : 11021481

Received **Tested**

: 13 May 2024 Diagnosed : 14 May 2024 - Don Baldridge Test Package : IND 2 (Additional Tests: PrtCount)

: 10 May 2024

Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F:

KraftHeinz - Springfield - Plant 8311 PCA

US 65804

2035 E BENNETT

SPRINGFIELD, MO

Contact: Service Manager