

# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**



Area  
**NWW GREENWOOD**  
 Machine Id  
**DT820**  
 Component  
**Transmission (Auto)**  
 Fluid  
**{not provided} (38 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0102322</b>	---	---
Sample Date	Client Info			<b>29 Apr 2024</b>	---	---
Machine Age	mls Client Info			<b>111673</b>	---	---
Oil Age	mls Client Info			<b>0</b>	---	---
Oil Changed	Client Info			<b>Not Chngd</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	---	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>160	<b>77</b>	---	---
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>50	<b>36</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>18</b>	---	---
Copper	ppm	ASTM D5185m	>225	<b>25</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>7</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>52</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>1</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>1</b>	---	---
Calcium	ppm	ASTM D5185m		<b>123</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>212</b>	---	---
Zinc	ppm	ASTM D5185m		<b>4</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>1880</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>5</b>	---	---
Sodium	ppm	ASTM D5185m		<b>8</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---

# OIL ANALYSIS REPORT



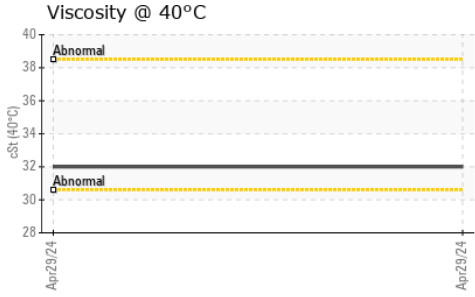


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	<b>32.0</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

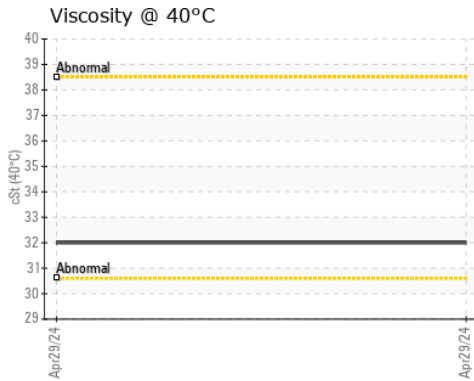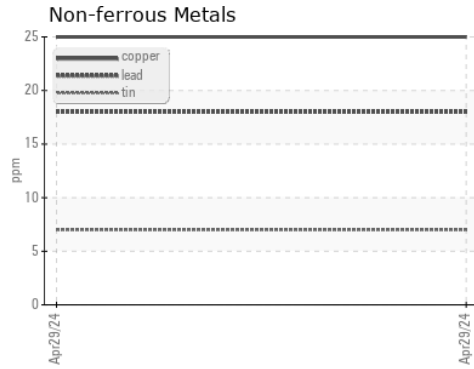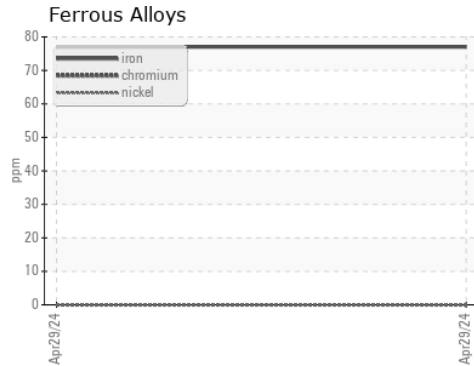

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0102322      **Received** : 10 May 2024  
**Lab Number** : **06175962**      **Tested** : 12 May 2024  
**Unique Number** : 11022015      **Diagnosed** : 12 May 2024 - Wes Davis  
**Test Package** : FLEET

**NW WHITE & CO - GREENWOOD DIVISION**  
 411 QUARRY ROAD  
 GREENWOOD, SC  
 US 29149  
 Contact: Mitchell Brown  
 greenwoodshop@nwwhite.com  
 T: (864)389-9553  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)