


# OIL ANALYSIS REPORT



Area  
**NWW GREENWOOD**  
 Machine Id  
**DT675**  
 Component  
**Transmission (Auto)**  
 Fluid  
**COGNIS EMGARD 2805 ATF (36 QTS)**

### Sample Rating Trend

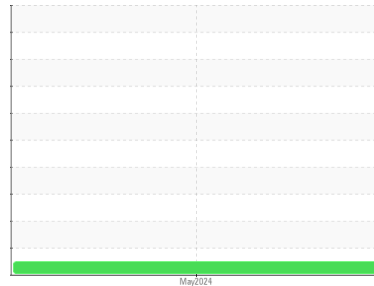

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0102381</b>	---	---
Sample Date	Client Info		<b>08 May 2024</b>	---	---
Machine Age	mls	Client Info	<b>205643</b>	---	---
Oil Age	mls	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >220	<b>95</b>	---	---
Chromium	ppm	ASTM D5185m >2	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m >5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m >5	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >75	<b>45</b>	---	---
Lead	ppm	ASTM D5185m >95	<b>41</b>	---	---
Copper	ppm	ASTM D5185m >60	<b>30</b>	---	---
Tin	ppm	ASTM D5185m >10	<b>5</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>123</b>	---	---
Barium	ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m	<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>4</b>	---	---
Calcium	ppm	ASTM D5185m	<b>107</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>311</b>	---	---
Zinc	ppm	ASTM D5185m	<b>4</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>1914</b>	---	---


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>13</b>	---	---
Sodium	ppm	ASTM D5185m	<b>10</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	---	---

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	---	---
Free Water	scalar	*Visual	<b>NEG</b>	---	---

# OIL ANALYSIS REPORT

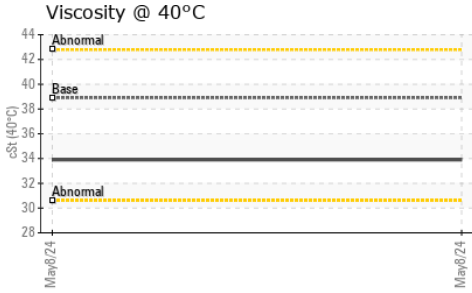




FLUID PROPERTIES	method	limit/base	current	history1	history2
------------------	--------	------------	---------	----------	----------

Visc @ 40°C	cSt	ASTM D445	38.9	<b>33.9</b>	---	---
-------------	-----	-----------	------	-------------	-----	-----

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS
--------

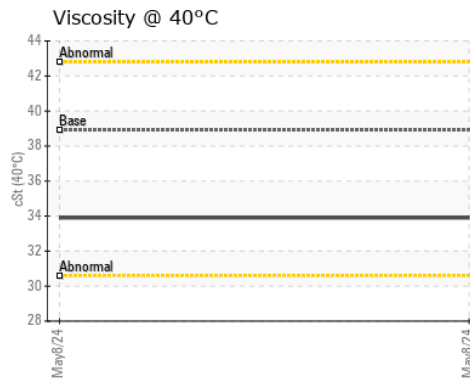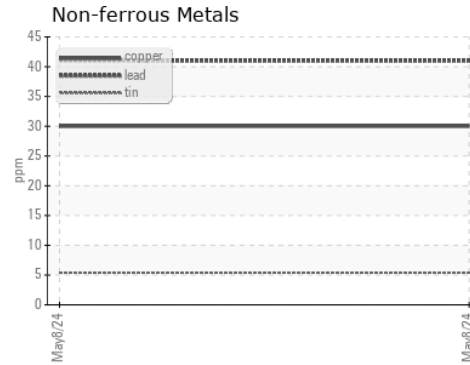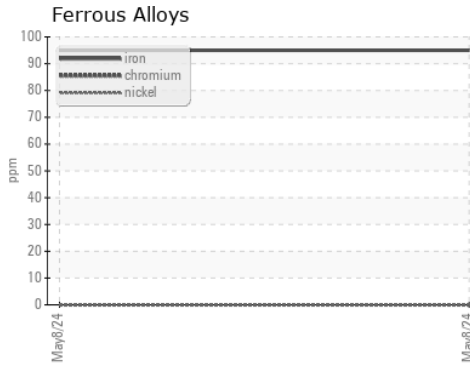

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0102381  
**Lab Number** : 06175966  
**Unique Number** : 11022019  
**Test Package** : FLEET

**Received** : 10 May 2024  
**Tested** : 12 May 2024  
**Diagnosed** : 12 May 2024 - Wes Davis

**NW WHITE & CO - GREENWOOD DIVISION**  
 411 QUARRY ROAD  
 GREENWOOD, SC  
 US 29149  
 Contact: Mitchell Brown  
 greenwoodshop@nwwhite.com  
 T: (864)389-9553  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)