


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

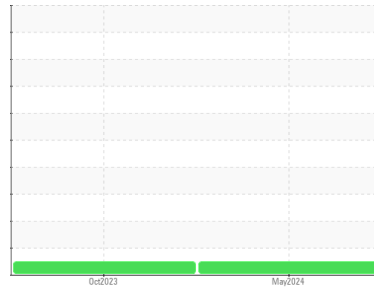

Area
NWW GREENWOOD
Machine Id
DT755
Component
Front Differential
Fluid
CHEVRON DELO SYNTHETIC GEAR 75W90 (4 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0102338	PCA0102370	---
Sample Date	Client Info			07 May 2024	11 Oct 2023	---
Machine Age	mls	Client Info		185394	152886	---
Oil Age	mls	Client Info		152886	152886	---
Oil Changed	Client Info			Not Chngd	N/A	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	NEG	NEG	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>1200	239	353	---
Chromium	ppm	ASTM D5185m	>8	1	2	---
Nickel	ppm	ASTM D5185m	>20	6	10	---
Titanium	ppm	ASTM D5185m	>4	<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>30	8	13	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>50	0	2	---
Tin	ppm	ASTM D5185m	>5	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		276	209	---
Barium	ppm	ASTM D5185m		0	<1	---
Molybdenum	ppm	ASTM D5185m		0	0	---
Manganese	ppm	ASTM D5185m		2	4	---
Magnesium	ppm	ASTM D5185m		<1	3	---
Calcium	ppm	ASTM D5185m		8	19	---
Phosphorus	ppm	ASTM D5185m		1503	1457	---
Zinc	ppm	ASTM D5185m		<1	3	---
Sulfur	ppm	ASTM D5185m		28101	24885	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>230	100	179	---
Sodium	ppm	ASTM D5185m		4	7	---
Potassium	ppm	ASTM D5185m	>20	3	6	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---

OIL ANALYSIS REPORT

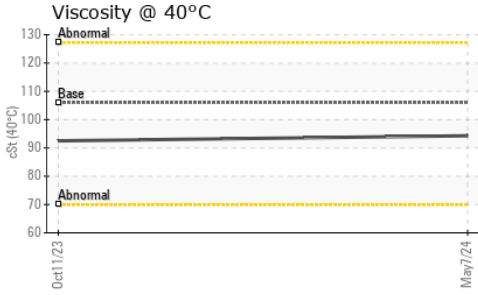




FLUID PROPERTIES		method	limit/base	current	history1	history2
------------------	--	--------	------------	---------	----------	----------

Visc @ 40°C	cSt	ASTM D445	106	94.3	92.5	---
-------------	-----	-----------	-----	-------------	------	-----

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color					no image	no image	no image
Bottom					no image	no image	no image

GRAPHS	
--------	--

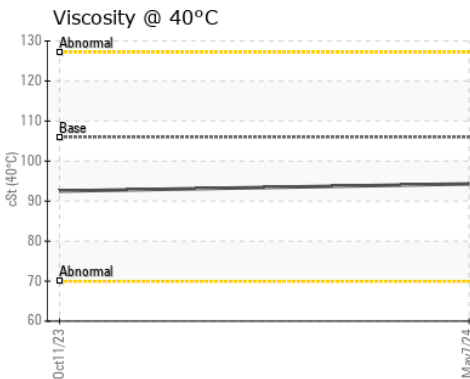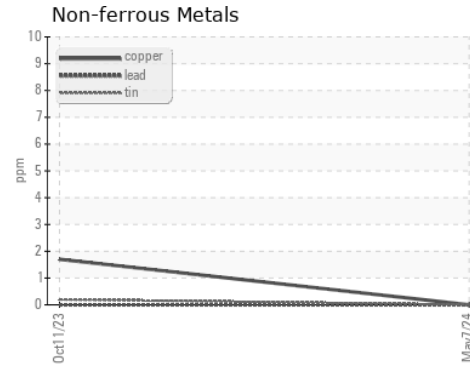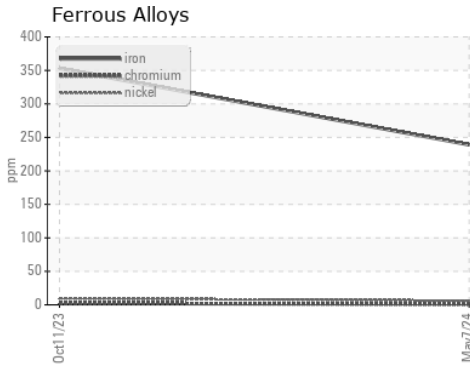

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0102338
Lab Number : **06175980**
Unique Number : 11022033
Test Package : FLEET

Received : 10 May 2024
Tested : 12 May 2024
Diagnosed : 14 May 2024 - Sean Felton

NW WHITE & CO - GREENWOOD DIVISION
 411 QUARRY ROAD
 GREENWOOD, SC
 US 29149

Contact: Mitchell Brown
 greenwoodshop@nwwhite.com
 T: (864)389-9553

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: