




# OIL ANALYSIS REPORT



Area  
**GFL035**  
 Machine Id  
**934041**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (42 QTS)**

Sample Rating Trend

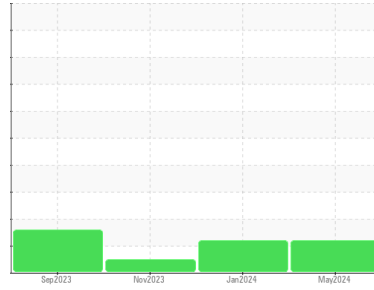

**DEGRADATION**



## DIAGNOSIS

### Recommendation

The oil is near the end of its useful service life, recommend schedule an oil change. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN level is low. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0116480</b>	GFL0085180	GFL0085159
Sample Date	Client Info		<b>07 May 2024</b>	23 Jan 2024	17 Nov 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>600</b>	600	300
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>ABNORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>21</b>	29	16
Chromium	ppm	ASTM D5185m >20	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>1</b>	1	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>11</b>	10	4
Lead	ppm	ASTM D5185m >40	<b>4</b>	5	<1
Copper	ppm	ASTM D5185m >330	<b>3</b>	4	4
Tin	ppm	ASTM D5185m >15	<b>2</b>	2	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>6</b>	4	10
Barium	ppm	ASTM D5185m 0	<b>2</b>	<1	0
Molybdenum	ppm	ASTM D5185m 60	<b>60</b>	58	51
Manganese	ppm	ASTM D5185m 0	<b>1</b>	3	2
Magnesium	ppm	ASTM D5185m 1010	<b>577</b>	643	540
Calcium	ppm	ASTM D5185m 1070	<b>1720</b>	1674	1492
Phosphorus	ppm	ASTM D5185m 1150	<b>784</b>	784	669
Zinc	ppm	ASTM D5185m 1270	<b>997</b>	1007	909
Sulfur	ppm	ASTM D5185m 2060	<b>2542</b>	2321	2371

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	10	8
Sodium	ppm	ASTM D5185m	<b>6</b>	10	5
Potassium	ppm	ASTM D5185m >20	<b>20</b>	19	6

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0</b>	0	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.1</b>	13.0	10.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>25.0</b>	26.4	20.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>21.7</b>	22.8	18.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>▲ 3.6</b>	▲ 3.0	5.2







# OIL ANALYSIS REPORT

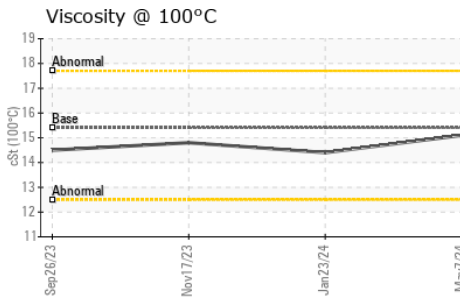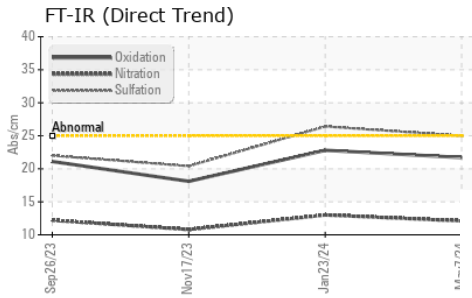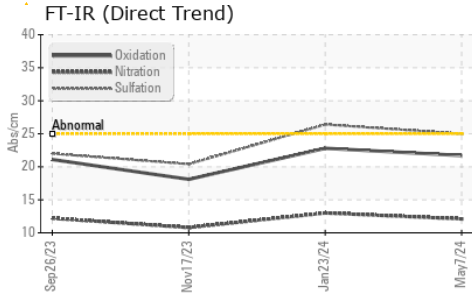

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	15.1	14.4	14.8

## GRAPHS

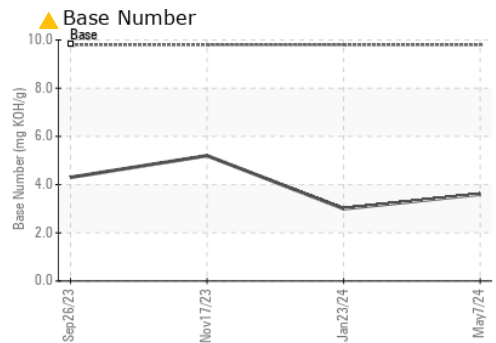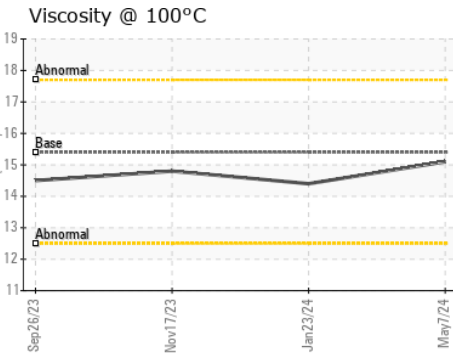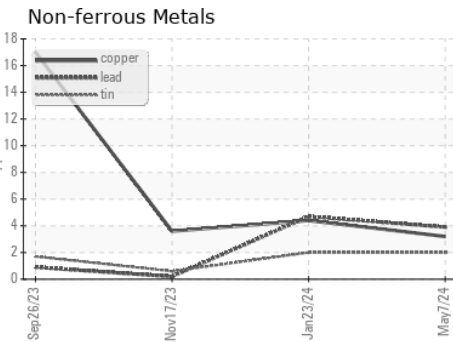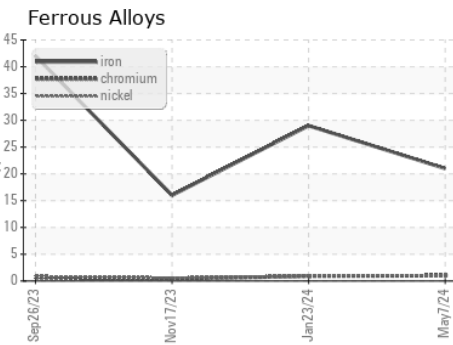

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0116480  
**Lab Number** : 06176482  
**Unique Number** : 11022535  
**Test Package** : FLEET

**Received** : 10 May 2024  
**Tested** : 13 May 2024  
**Diagnosed** : 14 May 2024 - Sean Felton

**GFL Environmental - 035 - Greensboro**  
 1236 Elon Place  
 High Point, NC  
 US 27263  
 Contact: JORGE COSTA  
 jorge.costa@gflenv.com  
 T: (336)668-3712  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)