




OIL ANALYSIS REPORT

Sample Rating Trend

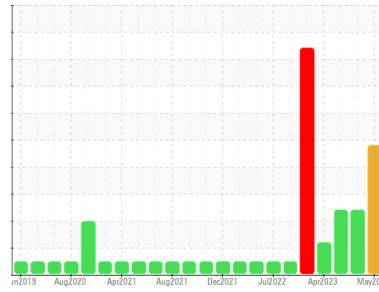

Area
GFL035
Machine Id
10994
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (9 GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0116478	GFL0102348	GFL0102291
Sample Date	Client Info	07 May 2024	27 Feb 2024	17 Nov 2023
Machine Age	hrs	0	0	6769
Oil Age	hrs	600	600	600
Oil Changed	Client Info	Not Chngd	Not Chngd	Changed
Sample Status		ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	46	34	18
Chromium	ppm ASTM D5185m >5	2	1	1
Nickel	ppm ASTM D5185m >4	<1	<1	<1
Titanium	ppm ASTM D5185m >2	<1	0	<1
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >15	10	4	4
Lead	ppm ASTM D5185m >25	1	<1	0
Copper	ppm ASTM D5185m >100	2	2	2
Tin	ppm ASTM D5185m >4	1	<1	<1
Vanadium	ppm ASTM D5185m	<1	<1	0
Cadmium	ppm ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	2	3	10
Barium	ppm ASTM D5185m 0	2	0	0
Molybdenum	ppm ASTM D5185m 60	86	63	69
Manganese	ppm ASTM D5185m 0	<1	<1	0
Magnesium	ppm ASTM D5185m 1010	1254	1102	842
Calcium	ppm ASTM D5185m 1070	1446	1242	1105
Phosphorus	ppm ASTM D5185m 1150	1468	989	953
Zinc	ppm ASTM D5185m 1270	1690	1484	1176
Sulfur	ppm ASTM D5185m 2060	4410	3369	3459

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	▲ 26	16	16
Sodium	ppm ASTM D5185m	▲ 103	▲ 116	▲ 210
Potassium	ppm ASTM D5185m >20	▲ 114	▲ 144	▲ 383
Glycol	% *ASTM D2982	NEG	NEG	NEG

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	0.9	0.9	0.4
Nitration	Abs/cm *ASTM D7624 >20	11.2	11.6	7.1
Sulfation	Abs/.1mm *ASTM D7415 >30	21.9	22.3	19.4


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	18.4	18.2	13.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.5	6.5	8.7




OIL ANALYSIS REPORT


▲ Silicon (ppm)

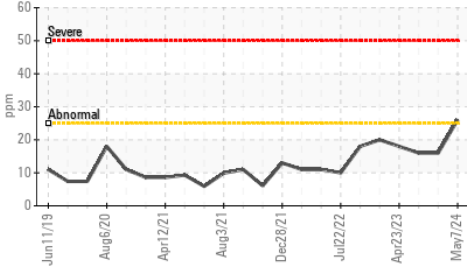


● Aluminum (ppm)

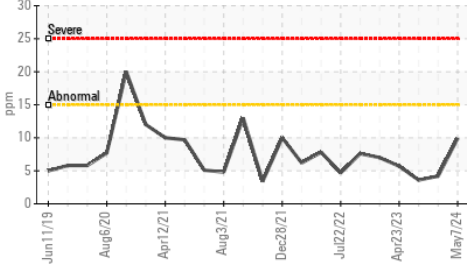


FT-IR (Direct Trend)

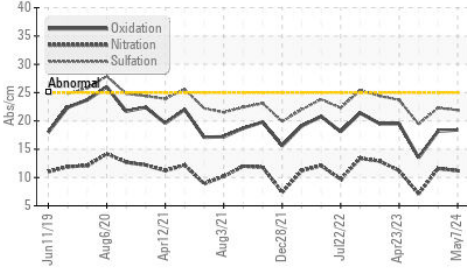

Glycol Contamination

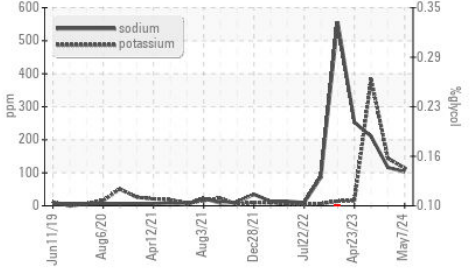

Viscosity @ 100°C

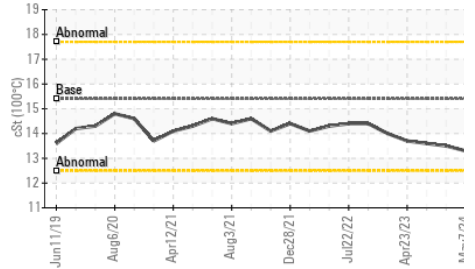


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.3	13.5

GRAPHS


Ferrous Alloys

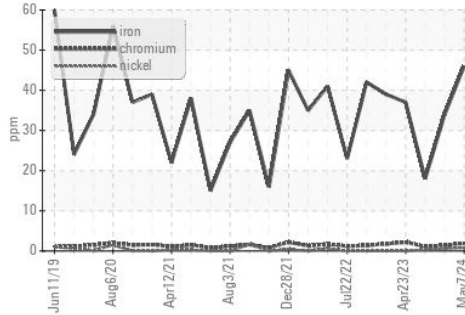


Non-ferrous Metals

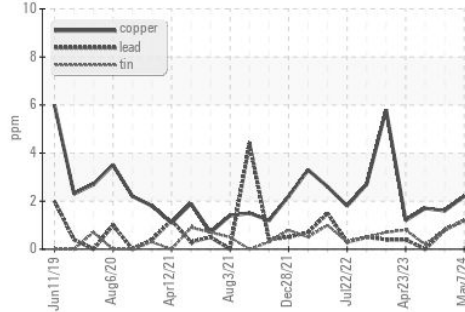

Viscosity @ 100°C

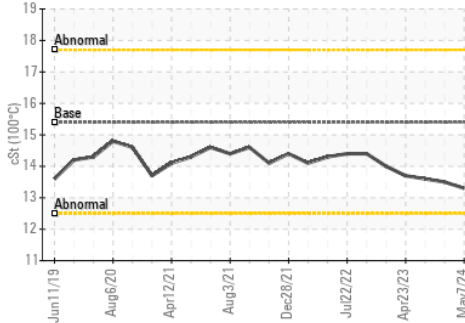

Base Number

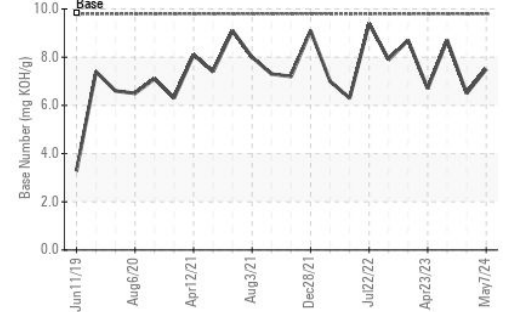

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0116478

Lab Number : 06176483

Unique Number : 11022536

Test Package : FLEET (Additional Tests: Glycol)

Received : 10 May 2024

Tested : 14 May 2024

Diagnosed : 14 May 2024 - Sean Felton

GFL Environmental - 035 - Greensboro

1236 Elon Place

High Point, NC

US 27263

Contact: JORGE COSTA

jorge.costa@gflenv.com

T: (336)668-3712

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)