




# OIL ANALYSIS REPORT

Sample Rating Trend

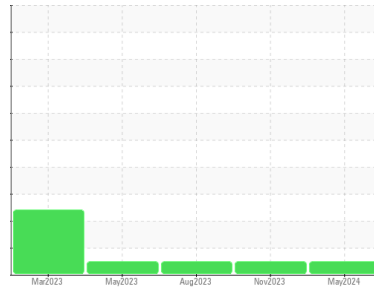

**NORMAL**



Machine Id  
**913027**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (10 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0095355</b>	GFL0095376	GFL0076927
Sample Date	Client Info		<b>03 May 2024</b>	21 Nov 2023	21 Aug 2023
Machine Age	hrs	Client Info	<b>3282</b>	2195	1631
Oil Age	hrs	Client Info	<b>566</b>	564	554
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>26</b>	15	13
Chromium	ppm	ASTM D5185m >20	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>7</b>	4	1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	4
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>4</b>	8	53
Tin	ppm	ASTM D5185m >15	<b>2</b>	1	1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>10</b>	5	6
Barium	ppm	ASTM D5185m 0	<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>65</b>	55	61
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>942</b>	884	1009
Calcium	ppm	ASTM D5185m 1070	<b>1159</b>	1076	1214
Phosphorus	ppm	ASTM D5185m 1150	<b>1082</b>	828	1040
Zinc	ppm	ASTM D5185m 1270	<b>1219</b>	1136	1335
Sulfur	ppm	ASTM D5185m 2060	<b>2937</b>	3072	3313

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	5	5
Sodium	ppm	ASTM D5185m	<b>7</b>	7	8
Potassium	ppm	ASTM D5185m >20	<b>4</b>	4	1

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.9</b>	0.6	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.3</b>	8.7	7.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.9</b>	20.1	19.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.0</b>	15.6	15.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.0</b>	7.2	7.2







# OIL ANALYSIS REPORT

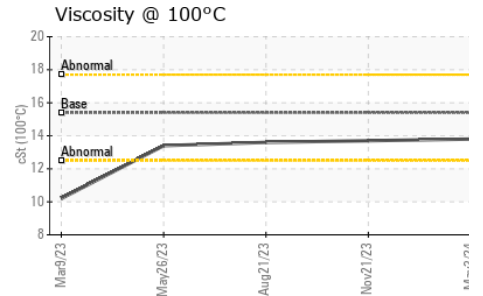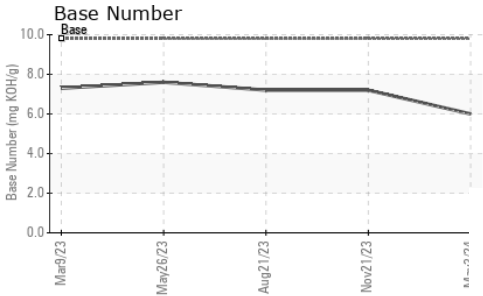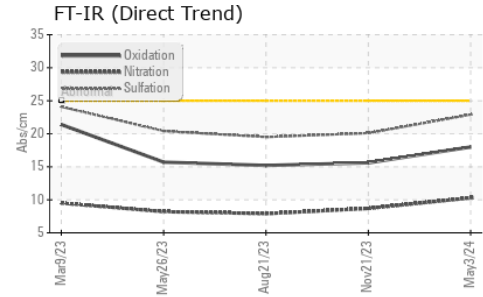

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	13.7

## GRAPHS

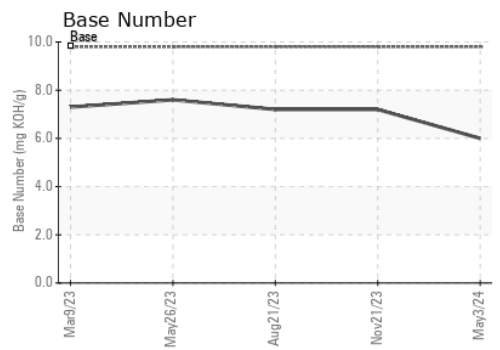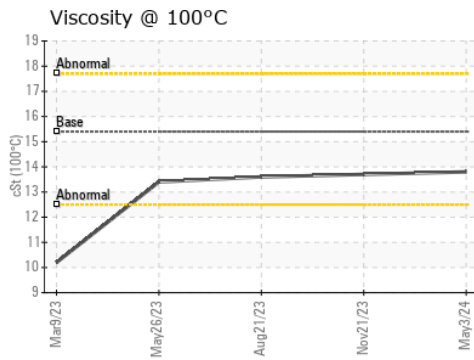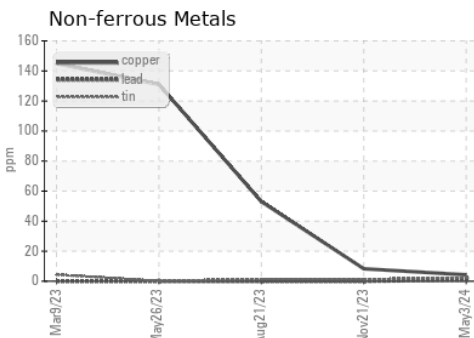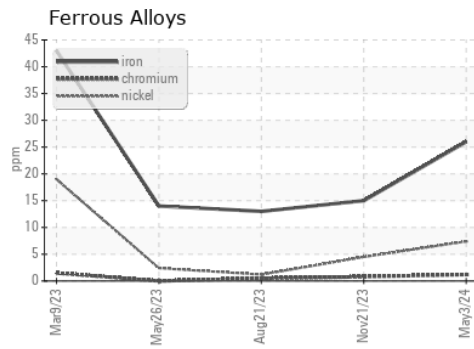

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0095355      **Received** : 10 May 2024  
**Lab Number** : 06176610      **Tested** : 13 May 2024  
**Unique Number** : 11022663      **Diagnosed** : 14 May 2024 - Sean Felton  
**Test Package** : FLEET

**GFL Environmental - 930 - Mosinee HC**  
 1372 State Highway 34  
 MOSINEE, WI  
 US 54455  
 Contact: Kirk Koss

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (715)571-2784

F: