


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

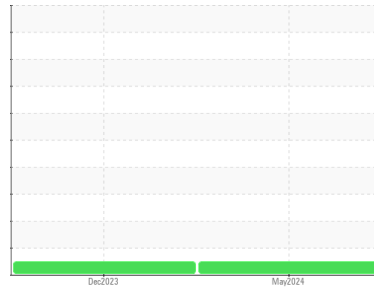

Machine Id
JOHN DEERE 624K 640
 Component
Transmission (Manual)
 Fluid
JOHN DEERE HY-GARD HYDRAULIC/RANSMISSION (5 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0118264	PCA0107141	---
Sample Date	Client Info		03 May 2024	21 Dec 2023	---
Machine Age	hrs	Client Info	17745	17000	---
Oil Age	hrs	Client Info	745	216	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	25	18	---
Chromium	ppm	ASTM D5185m >5	14	<1	---
Nickel	ppm	ASTM D5185m >5	0	0	---
Titanium	ppm	ASTM D5185m	<1	<1	---
Silver	ppm	ASTM D5185m >7	<1	0	---
Aluminum	ppm	ASTM D5185m >25	3	2	---
Lead	ppm	ASTM D5185m >45	0	0	---
Copper	ppm	ASTM D5185m >225	2	4	---
Tin	ppm	ASTM D5185m >10	0	0	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	19	76	---
Barium	ppm	ASTM D5185m	0	0	---
Molybdenum	ppm	ASTM D5185m	16	4	---
Manganese	ppm	ASTM D5185m	<1	0	---
Magnesium	ppm	ASTM D5185m	264	92	---
Calcium	ppm	ASTM D5185m	1314	3057	---
Phosphorus	ppm	ASTM D5185m	777	1080	---
Zinc	ppm	ASTM D5185m	945	1283	---
Sulfur	ppm	ASTM D5185m	2748	3816	---


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >125	9	7	---
Sodium	ppm	ASTM D5185m	3	0	---
Potassium	ppm	ASTM D5185m >20	4	1	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.77	---	---

OIL ANALYSIS REPORT

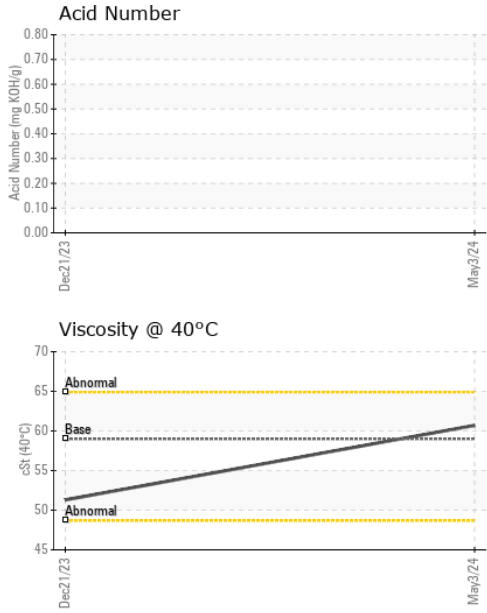


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 59	60.7	51.3	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

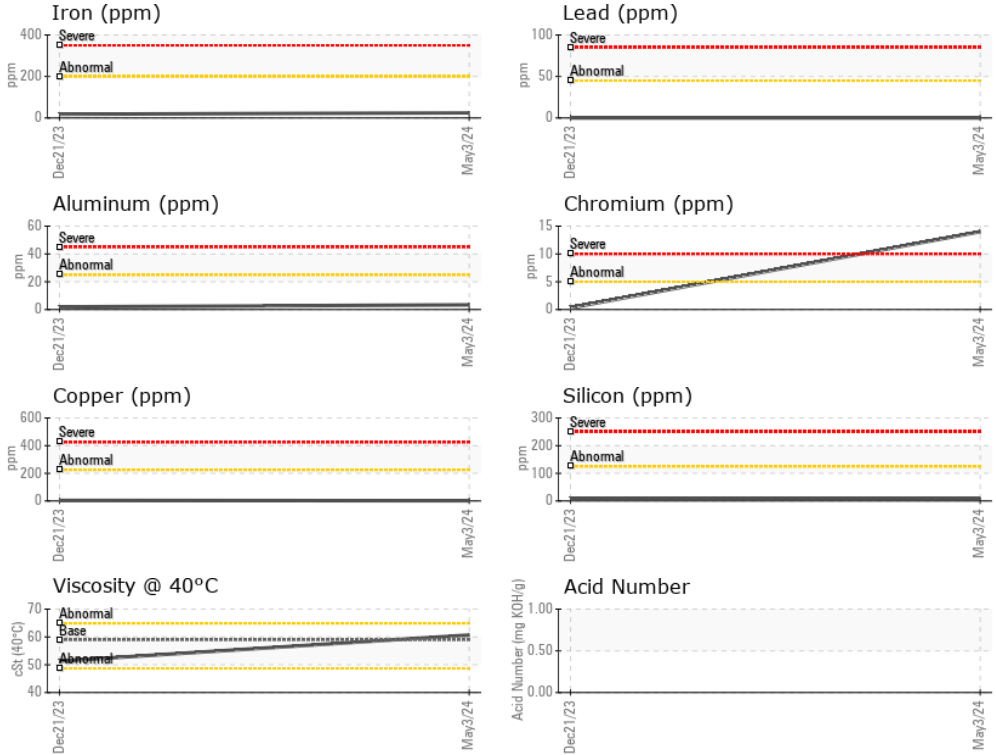

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0118264 **Received** : 13 May 2024
Lab Number : **06177863** **Tested** : 22 May 2024
Unique Number : 11029189 **Diagnosed** : 22 May 2024 - Jonathan Hester
Test Package : MOB 2

CENTRAL VALLEY AG
 5707 LANGWORTH
 OAKDALE, CA
 US 95361
 Contact: LAB TECH
 m-labtech@outlook.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)