

# OIL ANALYSIS REPORT

**Sample Rating Trend**

**NORMAL**


Area  
**(71214Z) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A624043**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

**DIAGNOSIS**
**Recommendation**

No corrective action is recommended at this time. Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0105704</b>	---	---
Sample Date	Client Info			<b>02 May 2024</b>	---	---
Machine Age	mls	Client Info		<b>10722</b>	---	---
Oil Age	mls	Client Info		<b>10722</b>	---	---
Oil Changed	Client Info			<b>Not Chngd</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	---	---
Water	WC Method	>0.2		<b>NEG</b>	---	---
Glycol	WC Method			<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>30</b>	---	---
Chromium	ppm	ASTM D5185m	>5	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>3	<b>1</b>	---	---
Aluminum	ppm	ASTM D5185m	>30	<b>21</b>	---	---
Lead	ppm	ASTM D5185m	>30	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>150	<b>116</b>	---	---
Tin	ppm	ASTM D5185m	>5	<b>8</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>53</b>	---	---
Barium	ppm	ASTM D5185m	0	<b>2</b>	---	---
Molybdenum	ppm	ASTM D5185m	50	<b>42</b>	---	---
Manganese	ppm	ASTM D5185m	0	<b>4</b>	---	---
Magnesium	ppm	ASTM D5185m	950	<b>538</b>	---	---
Calcium	ppm	ASTM D5185m	1050	<b>1717</b>	---	---
Phosphorus	ppm	ASTM D5185m	995	<b>839</b>	---	---
Zinc	ppm	ASTM D5185m	1180	<b>963</b>	---	---
Sulfur	ppm	ASTM D5185m	2600	<b>2683</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>6</b>	---	---
Sodium	ppm	ASTM D5185m		<b>5</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>56</b>	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.1</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.0</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.7</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>9.0</b>	---	---





# OIL ANALYSIS REPORT

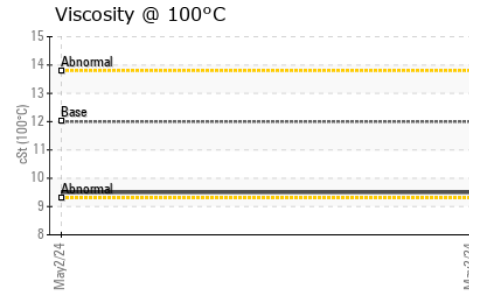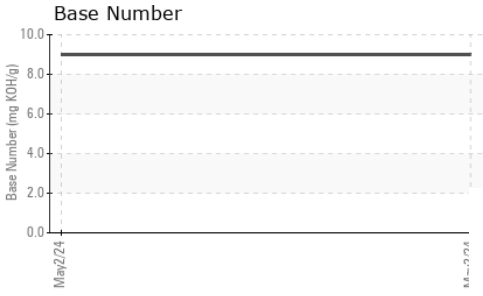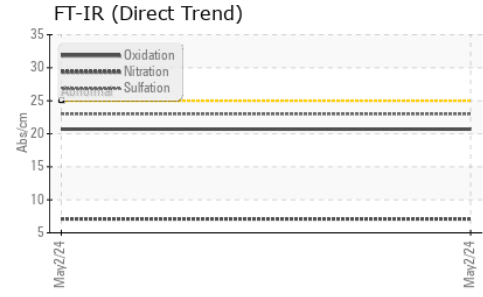

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>9.5</b>	---	---

## GRAPHS

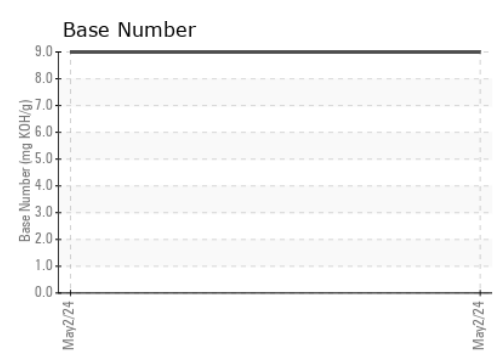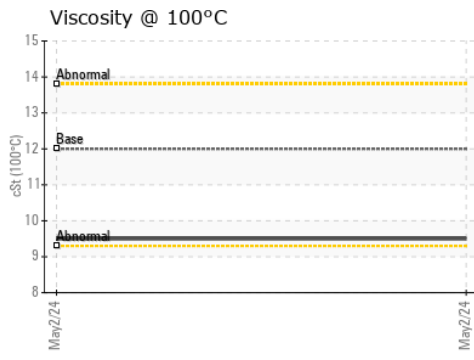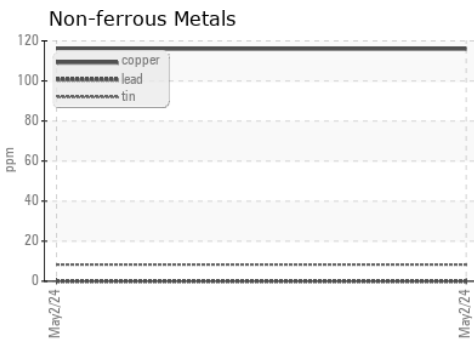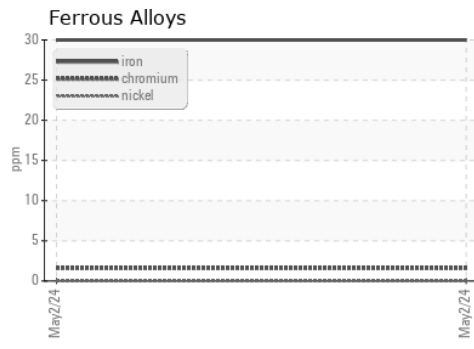

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0105704      **Received** : 14 May 2024  
**Lab Number** : **06178451**      **Tested** : 15 May 2024  
**Unique Number** : 11029777      **Diagnosed** : 16 May 2024 - Sean Felton  
**Test Package** : FLEET

**Transervice - Shop 1374 - Berkeley-Hartford**  
 80 International Drive  
 Windsor, CT  
 US 06095  
 Contact: Paul Santanella  
 psantanella@transervice.com  
 T: (860)687-1037  
 F: (860)687-1476

To discuss this sample report, CONTACT Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)