




# OIL ANALYSIS REPORT

Sample Rating Trend

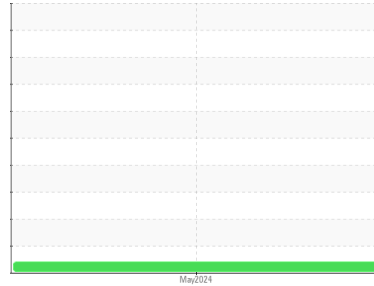

VISCOSITY



Machine Id  
**FL0544**  
 Component  
**1 Diesel Engine**  
 Fluid  
**MACK 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0108505</b>	---	---
Sample Date	Client Info		<b>02 May 2024</b>	---	---
Machine Age	hrs	Client Info	<b>3067</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Not Changed</b>	---	---
Sample Status			<b>ATTENTION</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>92</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>5</b>	---	---
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m >330	<b>3</b>	---	---
Tin	ppm	ASTM D5185m >15	<b>4</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>7</b>	---	---
Barium	ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>20</b>	---	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>753</b>	---	---
Calcium	ppm	ASTM D5185m	<b>1597</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>1096</b>	---	---
Zinc	ppm	ASTM D5185m	<b>1302</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>4545</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>15</b>	---	---
Sodium	ppm	ASTM D5185m	<b>8</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>3</b>	---	---
Fuel	%	ASTM D3524 >5	<b>0.1</b>	---	---

## INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.4</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.0</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.5</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>9.6</b>	---	---







# OIL ANALYSIS REPORT

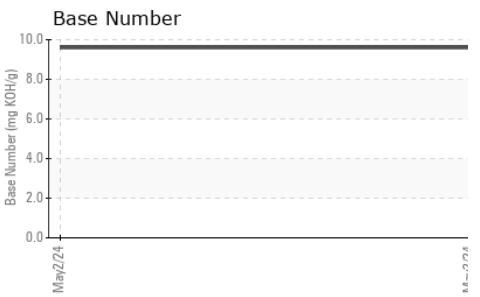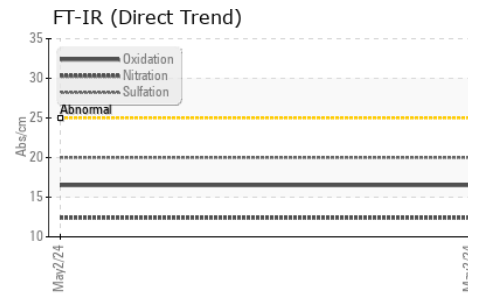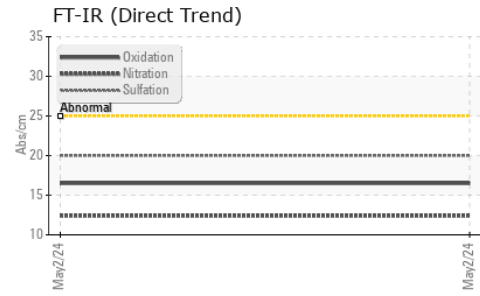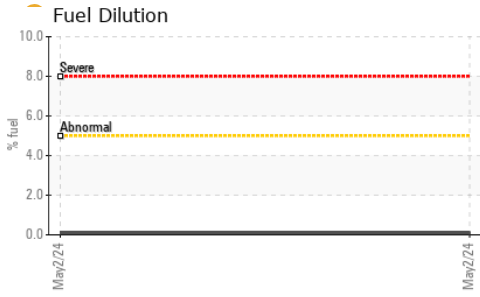

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	● 12.1	---	---

## GRAPHS

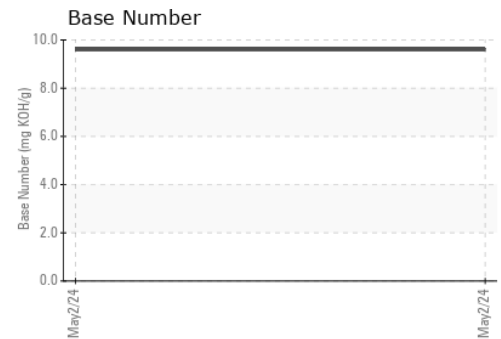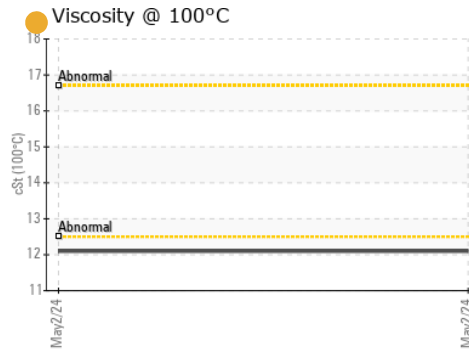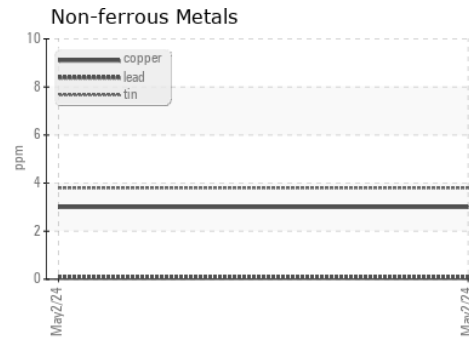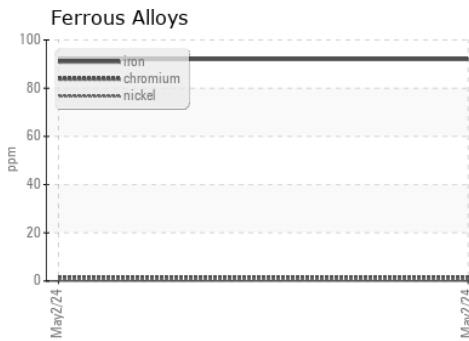

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0108505  
**Lab Number** : 06178539  
**Unique Number** : 11029865  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**Received** : 14 May 2024  
**Tested** : 16 May 2024  
**Diagnosed** : 16 May 2024 - Don Baldrige

**GFL Environmental - 904C - Eau Claire**  
 3010 MONDOVI RD  
 EAU CLAIRE, WI  
 US 54701  
 Contact: ANDY KANE

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (715)202-3420

F: