




# OIL ANALYSIS REPORT

Area  
**(62A1037) ALEXANDER CITY**  
 Machine Id  
**413057**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

Sample Rating Trend

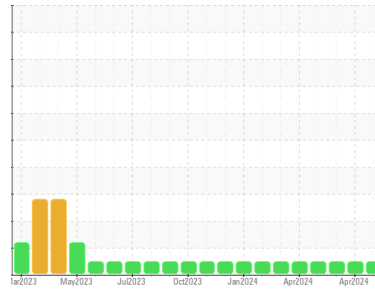

**NORMAL**

## DIAGNOSIS

- Recommendation**  
 Resample at the next service interval to monitor.
- Wear**  
 All component wear rates are normal.
- Contamination**  
 There is no indication of any contamination in the oil.
- Fluid Condition**  
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0079729</b>	GFL0091349	GFL0079743
Sample Date	Client Info		<b>04 May 2024</b>	17 Apr 2024	13 Apr 2024
Machine Age	hrs	Client Info	<b>2666</b>	2504	2470
Oil Age	hrs	Client Info	<b>2666</b>	2504	2470
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>15</b>	10	13
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>2</b>	0	1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	2	4
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>3</b>	2	3
Tin	ppm	ASTM D5185m >15	<b>1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>5</b>	6	12
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>60</b>	56	87
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m 1010	<b>827</b>	808	1256
Calcium	ppm	ASTM D5185m 1070	<b>1023</b>	987	1548
Phosphorus	ppm	ASTM D5185m 1150	<b>957</b>	836	1543
Zinc	ppm	ASTM D5185m 1270	<b>1149</b>	1004	1741
Sulfur	ppm	ASTM D5185m 2060	<b>2826</b>	2886	4274

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	6	7
Sodium	ppm	ASTM D5185m	<b>4</b>	3	5
Potassium	ppm	ASTM D5185m >20	<b>6</b>	2	6

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.4</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.0</b>	7.8	7.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.4</b>	18.6	18.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.2</b>	14.3	14.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.8</b>	6.9	7.0







# OIL ANALYSIS REPORT

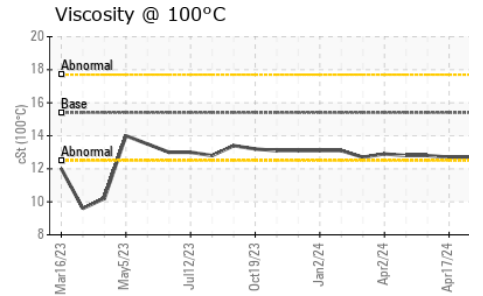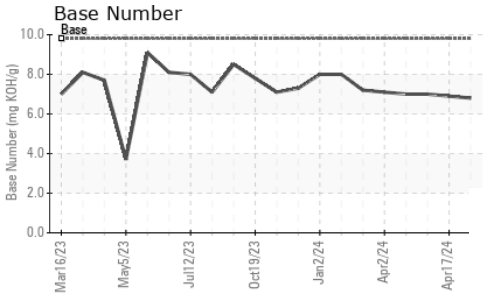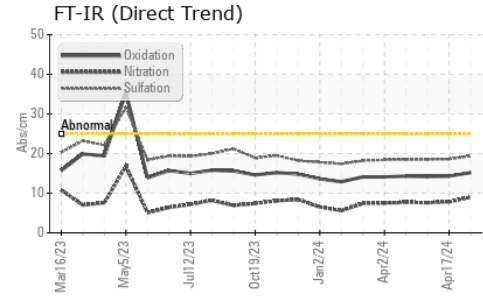

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.7	12.8

## GRAPHS

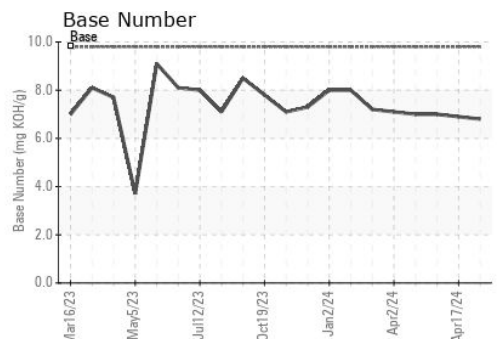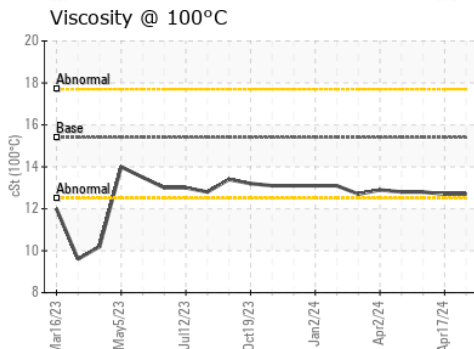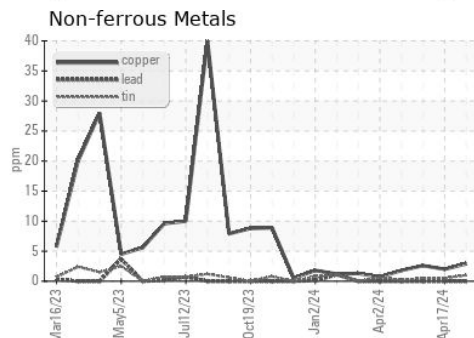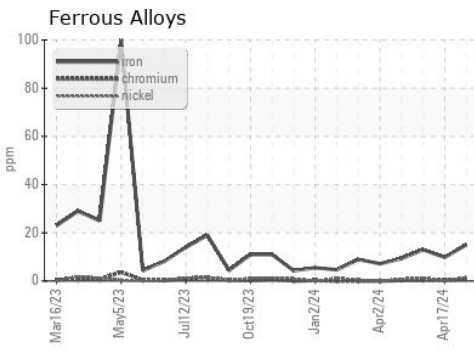

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0079729      **Received** : 14 May 2024  
**Lab Number** : 06178554      **Tested** : 15 May 2024  
**Unique Number** : 11029880      **Diagnosed** : 15 May 2024 - Wes Davis  
**Test Package** : FLEET

GFL Environmental - 172 - Montgomery-Alexander City-Tallahassee  
 Multiple Sites  
 Montgomery, AL  
 US 36108  
 Contact: BRANDON HURST  
 brandonhurst@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)