




# OIL ANALYSIS REPORT

Sample Rating Trend

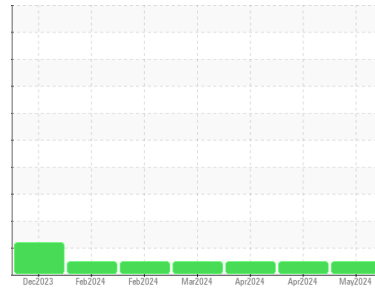

**NORMAL**



Machine Id

**834093**

Component

**Natural Gas Engine**

Fluid

**PETRO CANADA DURON GEO LD 15W40 (29 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0118832</b>	GFL0118802	GFL0114196
Sample Date	Client Info	<b>17 May 2024</b>	25 Apr 2024	04 Apr 2024
Machine Age	hrs	<b>890</b>	737	615
Oil Age	hrs	<b>890</b>	737	615
Oil Changed	Client Info	<b>N/A</b>	Not Changd	Not Changd
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	<b>&gt;0.1</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>50	<b>42</b>	68	71
Chromium	ppm	ASTM D5185m	>4	<b>2</b>	3	3
Nickel	ppm	ASTM D5185m	>2	<b>1</b>	3	3
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>9	<b>26</b>	44	45
Lead	ppm	ASTM D5185m	>30	<b>2</b>	3	3
Copper	ppm	ASTM D5185m	>35	<b>11</b>	19	21
Tin	ppm	ASTM D5185m	>4	<b>2</b>	2	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	50	<b>18</b>	12	8
Barium	ppm	ASTM D5185m	5	<b>&lt;1</b>	5	4
Molybdenum	ppm	ASTM D5185m	50	<b>58</b>	61	58
Manganese	ppm	ASTM D5185m	0	<b>9</b>	15	16
Magnesium	ppm	ASTM D5185m	560	<b>745</b>	790	839
Calcium	ppm	ASTM D5185m	1510	<b>1503</b>	1260	1259
Phosphorus	ppm	ASTM D5185m	780	<b>832</b>	779	759
Zinc	ppm	ASTM D5185m	870	<b>1001</b>	930	932
Sulfur	ppm	ASTM D5185m	2040	<b>2816</b>	2363	2712

## CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>+100	<b>17</b>	30	37
Sodium	ppm	ASTM D5185m		<b>8</b>	8	8
Potassium	ppm	ASTM D5185m	>20	<b>82</b>	149	161

## INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844		<b>0.1</b>	0.1	0
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.1</b>	11.9	12.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.5</b>	24.6	24.7


## FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.1</b>	22.3	22.8
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	<b>5.4</b>	4.0	3.4




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

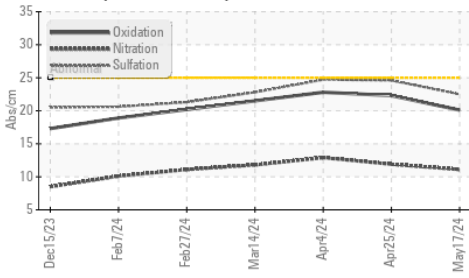

Base Number

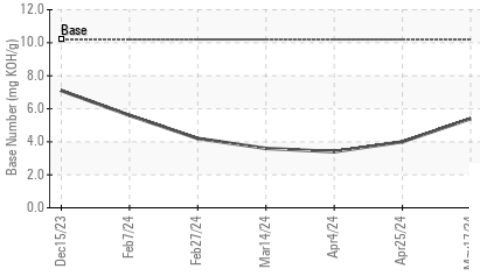

Viscosity @ 100°C

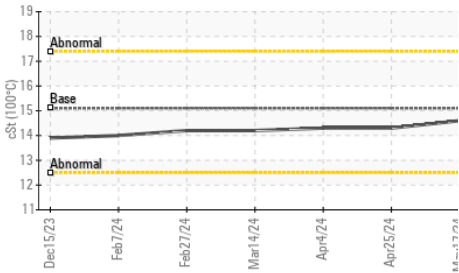


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.6	14.3

## GRAPHS


Ferrous Alloys

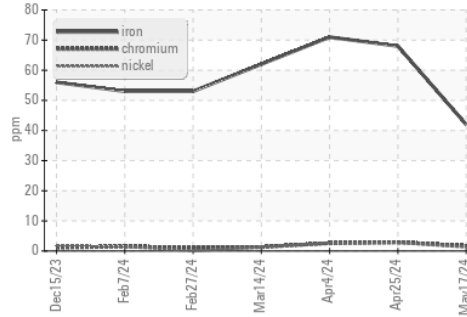


Non-ferrous Metals

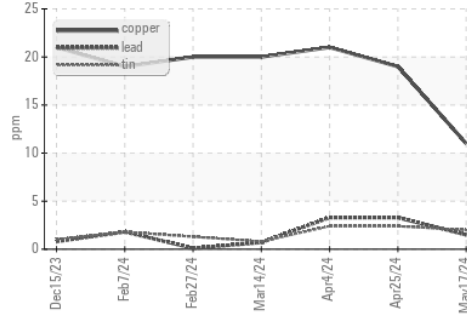

Viscosity @ 100°C

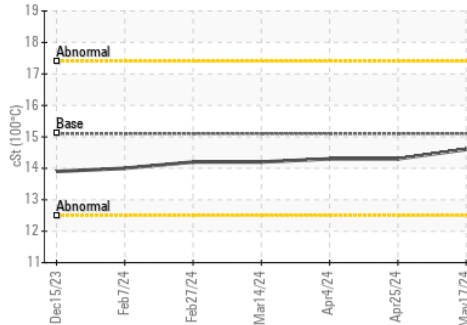

Base Number

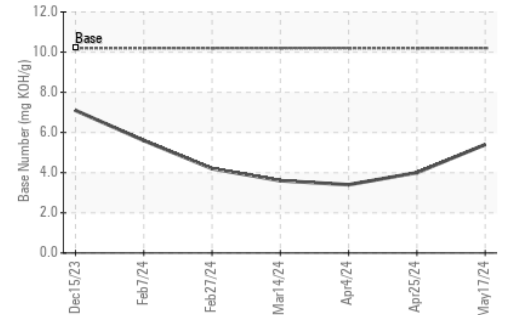

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0118832  
 Lab Number : 06185813  
 Unique Number : 11042565  
 Test Package : FLEET

Received : 21 May 2024  
 Tested : 22 May 2024  
 Diagnosed : 22 May 2024 - Wes Davis

GFL Environmental - 836 - Kansas City Hauling  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126

Contact: Christopher Gilkey  
 cgilkey@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: